
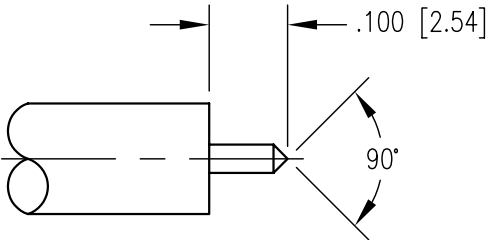


DWG. NO.		SD360-500-1410H	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7733	JED 6/27/03	JEM

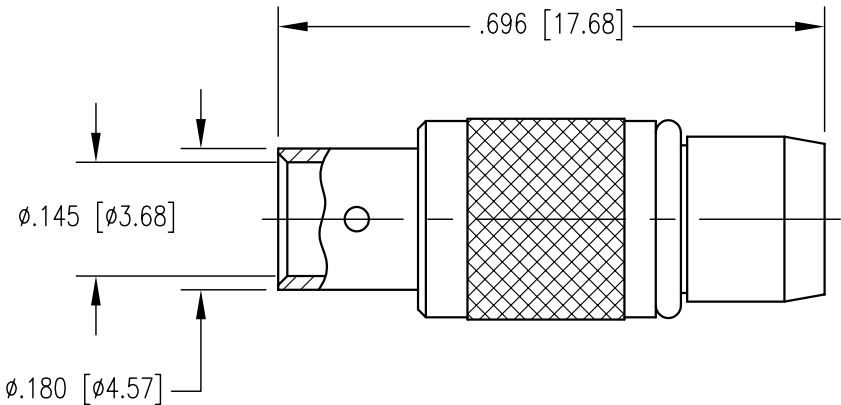

CABLE TRIMMING DIMENSIONS

- NOTES:
1. MATERIALS:
CENTER CONTACT: COPPER ALLOY
BODY: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710
O-RING: SILICONE RUBBER PER ZZ-R-765
 2. FINISH:
CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
 3. FOR USE WITH .141 DIA. SEMI-RIGID CABLE OR EQUIVALENT.
 4. FOR CABLING PROCEDURES USE CAP 5-24 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 4:1				NORTHROP GRUMMAN Winchester Electronics 62 Barnes Industrial Road North Wallingford, CT 06492			
CUSTOMER DRAWING				TITLE BMA STRAIGHT PLUG			
DRAWN JED	DATE 1/7/02	CHECKED JWH	DATE 1/11/02	A SD360-500-1410H SHT. 1 OF 1 REV. A			
APPROVED JEM	DATE 1/11/02	APPROVED KJT	DATE 1/11/02				