

GRIP CLIP™ TRANSFER PUMP

Grip Clip™ Bomba De Transferencia

Model No. W1156

OPERATOR'S MANUAL



PT
Performance Tool®

FOR YOUR SAFETY,
please read these instructions carefully and retain them for future use.

LIMITED WARRANTY

Performance Tool® extends only the following warranties, and only to original retail purchasers. These warranties give specific legal rights. Except where prohibited by local law, the law of the State of Washington governs all warranties and all exclusions and limitations of warranties and remedies. There may be other rights which vary from state to state.

Performance Tool® warrants the product to be free from defects in materials and workmanship under normal use and service. A defective product may be returned for a free replacement within 90 days from the date of purchase, provided that product is returned to place of purchase immediately after discovery of defect. After 90 days and up to one year from date of purchase, Performance Tool® will replace at no charge any parts which our examination shall disclose to be defective and under warranty. These warranties shall be valid only when a sales receipt showing the date of purchase accompanies the defective product or defective part(s) being returned. For part(s) after 90 days, please remit your request, postage prepaid to:

Performance Tool, P.O. Box 88259 Tukwila, WA 98138

These warranties exclude batteries, bulbs, blades, bits, punches, dies, bulbs, fuses, hoses, and other consumables which must be replaced under normal use and service. These warranties shall not apply to any product or part which is used for a purpose for which it is not designed, or which has been repaired or altered in any way so as to affect adversely its performance or reliability, nor shall these warranties apply to any product or part which has been subject to misuse, neglect, accident or wear and tear incident to normal use and service.

Performance Tool® does not authorize any other person to make any warranty or to assume any liability in connection with its products.

Except for warranties of title and the limited express warranties set forth above, Performance Tool® makes no express or implied warranties of any kind with respect to its products. In particular, Performance Tool® makes no implied warranty of merchantability and no implied warranty of fitness for any particular purpose, except that for goods purchased primarily for personal, family or household use and not for commercial or business use, Performance Tool® makes an implied warranty of merchantability (and, if otherwise applicable, an implied warranty of fitness for a particular purpose), but only for the particular qualities or characteristics, and for the duration, expressly warranted above.

The laws on limitation of implied warranties may differ from state to state, so the above limitations may not apply in all cases.




Performance Tool® shall not be liable for consequential, incidental or special damages resulting from or in any manner related to any product, or to the design, use, or any inability to use the product. The sole and exclusive remedy for a defective product or part shall be the repair, or replacement thereof as provided above. The laws on limitation of remedies or on consequential, incidental or special damages may vary from state to state, so the above limitations may not apply in all cases.

WARNING: This product and its packaging contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Always wear eye protection when using tools.

SPECIFICATIONS

- Quick change fittings for easy attach and release
- Clear view barrel allows visual inspection
- Quickly transfers low-viscosity fluids, such as water and oils
- Also works as an air pump
- Ideal for inflating tires, beach balls, or siphoning liquids and more
- Not for use with caustic or highly acidic liquids

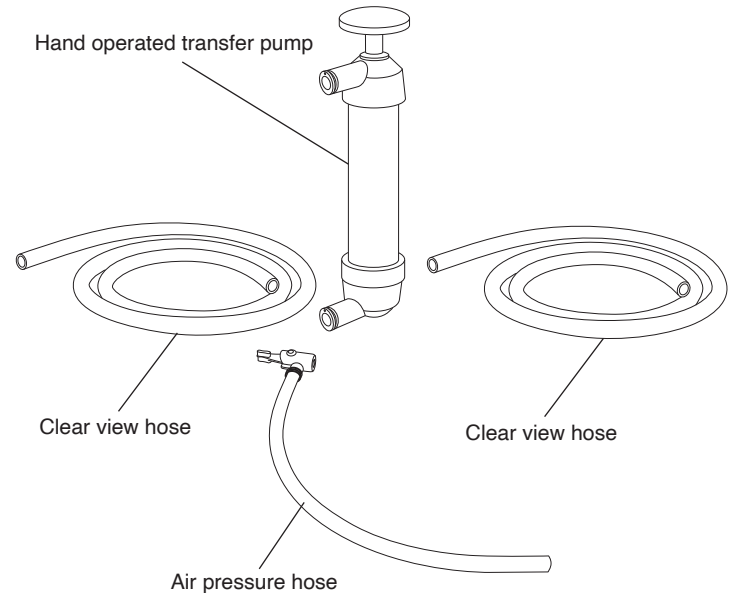

OPERATION

To use as a siphon:

1. Insert the clear hoses to the top and bottom nozzles on the pump. Depress the white fittings on the connectors when inserting the hose, then release. Firmly pull hoses to ensure a secure fit.
2. Insert the clear hose from the top nozzle (intake) into the liquid needing to be transferred. Insert the clear hose from the bottom nozzle (discharge) into where the liquid is to go. **NOTE:** For proper siphoning, the discharge hose must be lower than the intake hose.
3. Prime the pump by pumping the handle 3-4 times. Once the liquid begins to flow, it will flow without further pumping.

After siphoning gasoline, oil, or any flammable liquid, it is very important to clean the pump.

To change oil:

1. To remove motor oil from the crankcase of an engine, follow steps 1 & 2 above.
2. Insert the top (intake) hose into the engine dipstick hole until it reaches the bottom of the crankcase.
3. Place the bottom (discharge) hose into a drain pan and start pumping.

To use as an air pump:

1. Place the air pressure hose into the bottom nozzle (discharge) and tighten securely. Attach Snap-shut valve and begin pumping.
2. To inflate footballs, beach balls, etc., place the inflation needle into the Snap-shut valve on the end of the air hose and begin pumping.

Cleaning Instructions:

Usually flushing the pump and hoses with hot water is all that is needed for cleaning. For a more thorough cleaning, the pump can be disassembled, without the use of tools. When using with flammable liquids such as fuel through cleaning is required. Be sure all the fuel is drained out before disassembly. Pull the black cap off on the pump handle side. Thoroughly clean the tube, plunger and rinse the hoses. Before assembly lubricate the O-Ring on the plunger with light oil or petroleum jelly. Failure to do so will result in the O-Ring drying out and seizing the plunger in the tube.

PT
Performance Tool®

P.O. Box 88259 Tukwila, WA 98138 • © 2014 Wilmar Corporation • All rights reserved
Performance Tool® is a registered trademark of Wilmar Corporation