


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KN-39-75 (SHEET 1 OF 2)

REVISIONS	
ISSUE	CHANGES
3	CN 39578 A REDRAWN DCT 8/21/6

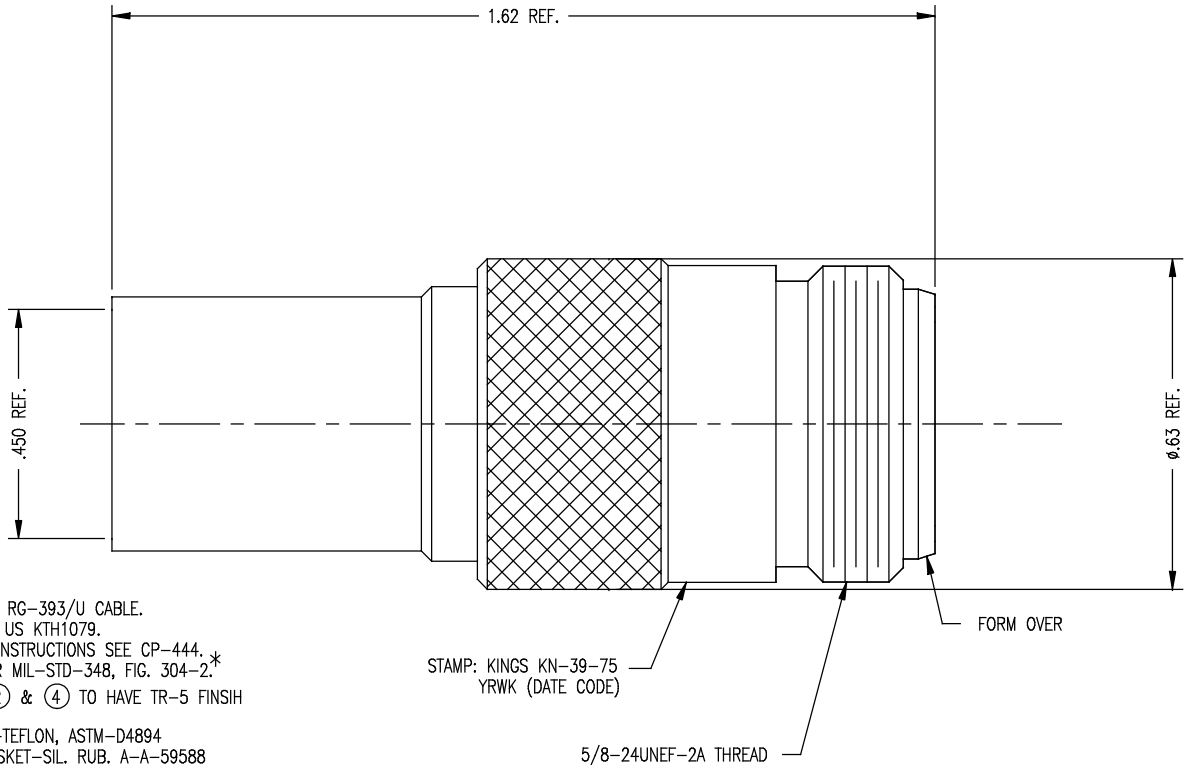

- NOTES:
1. FOR USE WITH RG-393/U CABLE.
 2. FOR CRIMPING US KTH1079.
 3. FOR CABLING INSTRUCTIONS SEE CP-444.*
 4. INTERFACE PER MIL-STD-348, FIG. 304-2.*
 5. ITEMS ① , ② & ④ TO HAVE TR-5 FINISH
 6. MATERIALS:
INSULATOR-TEFLON, ASTM-D4894
K-GRIP GASKET-SIL. RUB. A-A-59588
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B140
CENTER CONTACT-BER. COP., ASTM-B-196
ALL OTHER METAL PARTS-BRASS, ASTM-B16
 7. FINISHES:
CENTER CONTACT-HARD GOLD PLATE PER ASTM-B488
ALL OTHER METAL PARTS KINGS TARNISH RESISTANT (TR-5)
 8. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
WORKING VOLTAGE-1000 VRMS
FREQUENCY RANGE-DC TO 11 GHZ

SCALE	
APPROX SURFACE AREA	
USED ON	
REF: —	
JACK, N	
DRAWN DCT	DATE 8/21/6
DESIGN	DATE
APPR.	DATE
 KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730	

KN-39-75 (SHEET 1 OF 2)

GSD