
# PARAGON FULL/QUEEN BED ASSEMBLY INSTRUCTIONS



#### **BOX #1**


A. HEADBOARD PANEL 1 PC 1 PC B. LEFT HEADBOARD LEG C. RIGHT HEADBOARD LEG 1 PC D. FOOTBOARD 1 PC

**HEADBOARD HARDWARE BOX\*** 

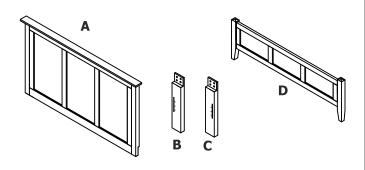

### **BOX #2**

E. SIDE RAIL 2 PCS F. BED SLAT 3 PCS G. SUPPORT LEG 3 PCS **BED HARDWARE BOX\*** 



PARAGON BED ASSEMBLED



**HEADBOARD HARDWARE PACKED IN BOX #1** SPRING 8 WASHER PCS

#### **BED HARDWARE PACKED IN BOX #2**

1	PAN HEAD SCREW (6x15mm)	<b>12</b> PCS	2	WOOD SCREW (8x30mm)	<b>7</b> PCS	3	ALLEN KEY	1 PC
	687							







ALLEN BOLT (6x40mm) **PCS** 



TOOL REQUIRED : PHILLIPS HEAD SCREWDRIVER (NOT PROVIDED)

> YOUR BOX **MAY CONTAIN EXTRA HARDWARE**








# STEP 1:

ALLEN BOLTS 8

(6x35mm)

**USE HEADBOARD HARDWARE PACKED IN BOX #1** FOR STEP 1.


3

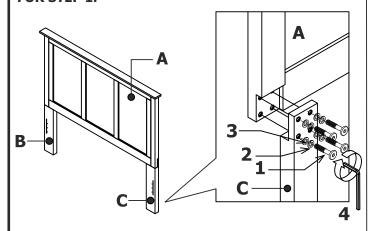


UPDATED: JULY 1ST, 2020

#### **STEP 2:**

**USE BED HARDWARE PACKED IN BOX #2 FOR STEP 2** AND ALL REMAINING STEPS.

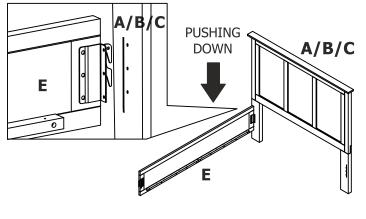

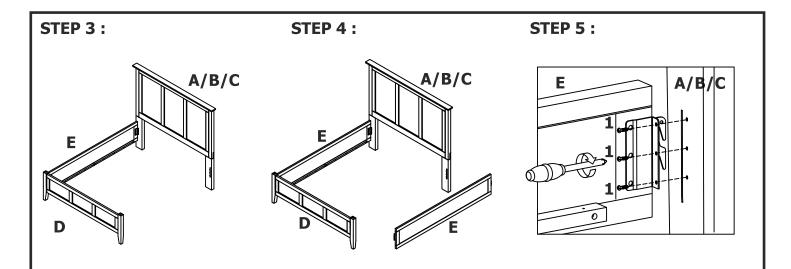




#### **STOP**

- IF USING BED FRAME WITH ADJUSTABLE MATTRESS BASE, SKIP TO APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION CONTINUE TO STEP 6.



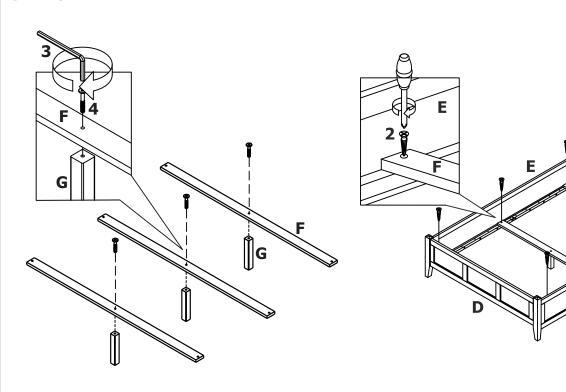




# INSTRUCTIONS FOR ADJUSTING MAINTENANCE INSTRUCTIONS : LEVELERS :

POSITION THE BED IN YOUR ROOM. LOCATE LEVELERS UNDER EACH SUPPORT LEG (**G**).

TURN LEVELERS COUNTER-CLOCKWISE TO EXTEND, CLOCKWISE TO RETRACT.

ADJUST LEVELERS UNTIL EACH SUPPORT LEG IS APPLYING EQUAL UPWARD PRESSURE ON THE BED SLAT.



• REMOVE BOX SPRING AND MATTRESS BEFORE MOVING YOUR BED.

A/B/C

- LIFT YOUR BED WHEN MOVING IT. DRAGGING CAN DAMAGE SUPPORT LEG.
- READJUST LEVELERS AFTER MOVING YOUR BED.

UPDATED: JULY 1ST, 2020

# PARAGON FULL/QUEEN BED APPENDIX A:ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT



AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

## THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

F. BED SLAT 3 PCS 2. WOOD SCREW (8x30mm) 7 PCS G. SUPPORT LEG 3 PCS 4. ALLEN BOLT (6x40mm) 4 PCS

#### **STEP 1:**

USE ALLEN KEY (3) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

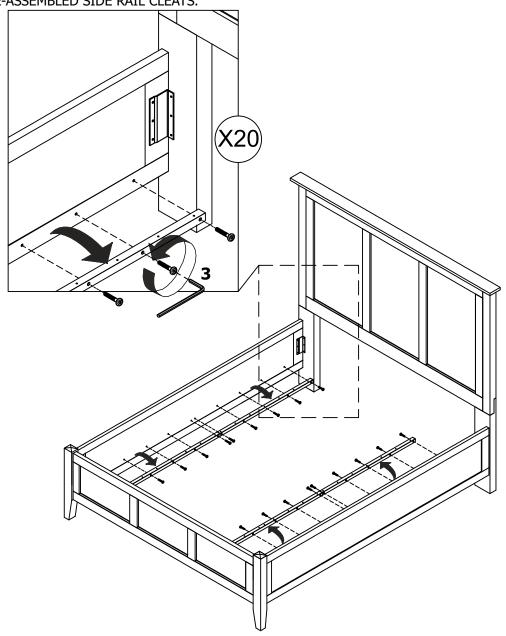

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.


# **PARAGON KING BED ASSEMBLY INSTRUCTIONS**



#### **BOX #1**


A. HEADBOARD PANEL 1 PC 1 PC B. LEFT HEADBOARD LEG C. RIGHT HEADBOARD LEG 1 PC 1 PC D. FOOTBOARD

**HEADBOARD HARDWARE BOX\*** 

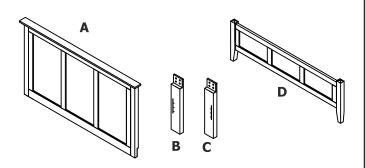

#### **BOX #2**

E. SIDE RAIL 2 PCS F. BED SLAT 3 PCS G. SUPPORT LEG 6 PCS **BED HARDWARE BOX\*** 



#### PARAGON BED ASSEMBLED



**HEADBOARD HARDWARE PACKED IN BOX #1** SPRING 8 WASHER PCS

BED	<b>HARDWAR</b>	E PACKED	IN BOX	#2
-----	----------------	----------	--------	----

	PAN HEAD SCREW (6x15mm)	PCS		WOOD SCREW (8x30mm)	PCS	_	ALLEN KEY	PC

**ALLEN BOLT** (6x40mm) **PCS** 



TOOL REQUIRED : PHILLIPS HEAD SCREWDRIVER (NOT PROVIDED)

> YOUR BOX **MAY CONTAIN EXTRA HARDWARE**








## STEP 1:

ALLEN BOLTS 8

(6x35mm)

**USE HEADBOARD HARDWARE PACKED IN BOX #1** FOR STEP 1.


3

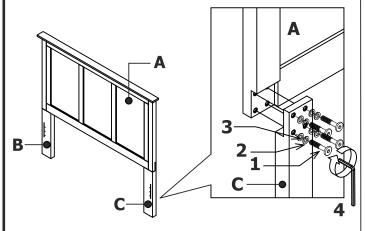


UPDATED: JULY 1ST, 2020


#### STEP 2:


**USE BED HARDWARE PACKED IN BOX #2 FOR STEP 2** AND ALL REMAINING STEPS.

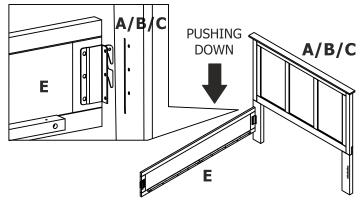

STEP 3: STEP 4: STEP 5:










### **STOP**

- IF USING BED FRAME WITH ADJUSTABLE MATTRESS BASE, SKIP TO APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION CONTINUE TO STEP 6.

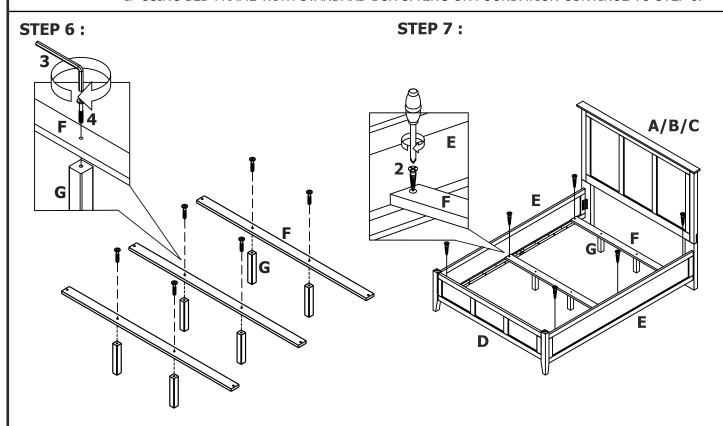


# INSTRUCTIONS FOR ADJUSTING LEVELERS:

POSITION THE BED IN YOUR ROOM. LOCATE LEVELERS UNDER EACH SUPPORT LEG (**G**).

TURN LEVELERS COUNTER-CLOCKWISE TO EXTEND, CLOCKWISE TO RETRACT.

ADJUST LEVELERS UNTIL EACH SUPPORT LEG IS APPLYING EQUAL UPWARD PRESSURE ON THE BED SLAT.



## **MAINTENANCE INSTRUCTIONS:**

- REMOVE BOX SPRING AND MATTRESS BEFORE MOVING YOUR BED.
- LIFT YOUR BED WHEN MOVING IT. DRAGGING CAN DAMAGE SUPPORT LEG.
- READJUST LEVELERS AFTER MOVING YOUR BED.

UPDATED: JULY 1ST, 2020

# PARAGON KING BED

## APPENDIX A:ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT



AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

## THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

F. BED SLAT 3 PCS 2. WOOD SCREW (8x30mm) 7 PCS G. SUPPORT LEG 6 PCS 4. ALLEN BOLT (6x40mm) 7 PCS

#### **STEP 1:**

USE ALLEN KEY (3) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

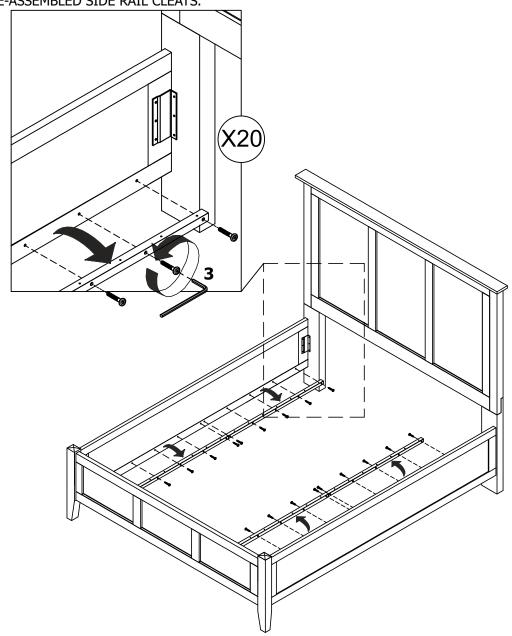

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

UPDATED: JULY 1ST, 2020