

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	06/01/11	TRC

ENGINEERING DATA



ELECTRICAL:
IMPEDANCE- 50 OHMS NOMINAL
FREQUENCY RANGE- DC TO 10 GHz
VSWR MAX- 1.10 :1

MECHANICAL:
INTERFACE- PER MIL-STD-348

MATERIAL:
INSULATOR-TEFLON, NORYL
CONTACTS- BRASS & BERYLLIUM COPPER
BODIES- STAINLESS STEEL & BRASS


FINISH:
CONTACTS- GOLD PLATED
BODIES- GOLD PLATED

ENVIROMENTAL:
TEMPERATURE: 0° C to +85°C

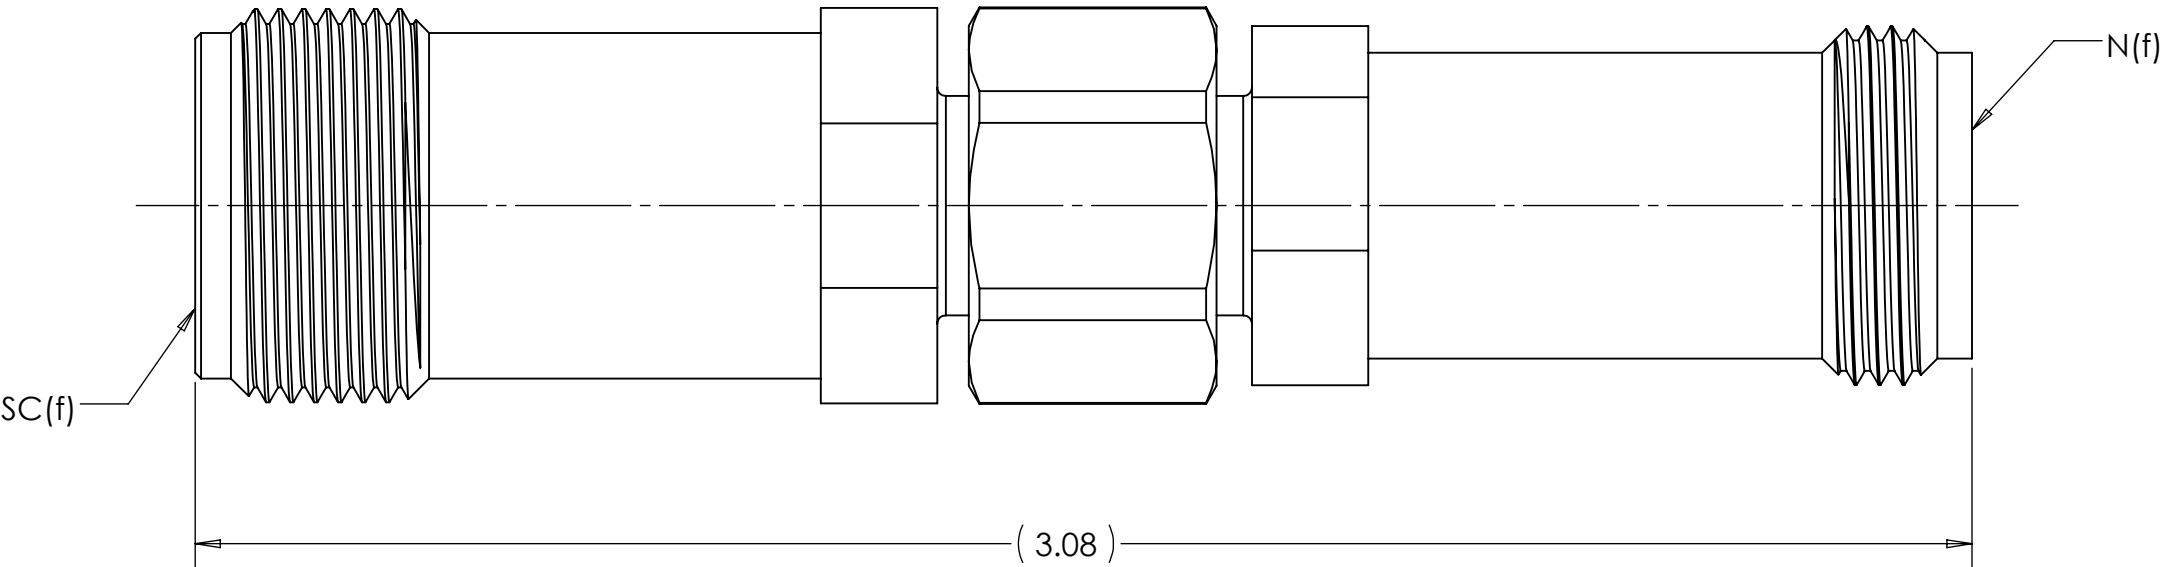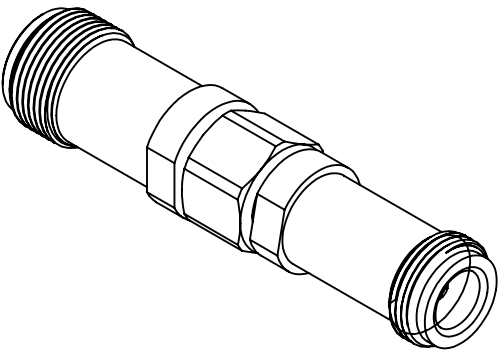

NOTES:

1. UNLESS OTHERWISE SPECIFIED;
ALL DIMENSIONS ARE REFERENCE ONLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN JEF	DATE 05-11-11	<div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™</div>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. TRC	DATE 06/01/11			
	TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2°	MFG APPR.	DATE	TITLE: CONNECTOR, CO-AXIAL N(f) to SC(f) ADAPTER		
	COMMENTS:	OTHER APPR. AM	DATE 05/18/11			
surface area: sq inch		weight: lbs		SIZE B		
				DWG. NO. TRU-11104-GGX		REV -
				CAGE CODE: 92180		SHEET 1 OF 1

63/

