





# KITCHEN FAUCETS

- Mandolin™ Series
- Single Handle Deck Mount
- 1 Hole or 3 Hole Sink Applications

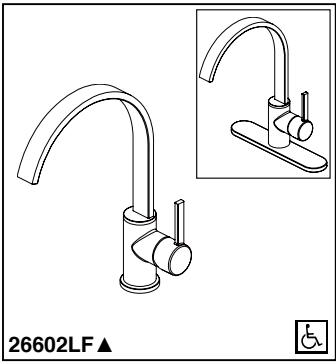


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

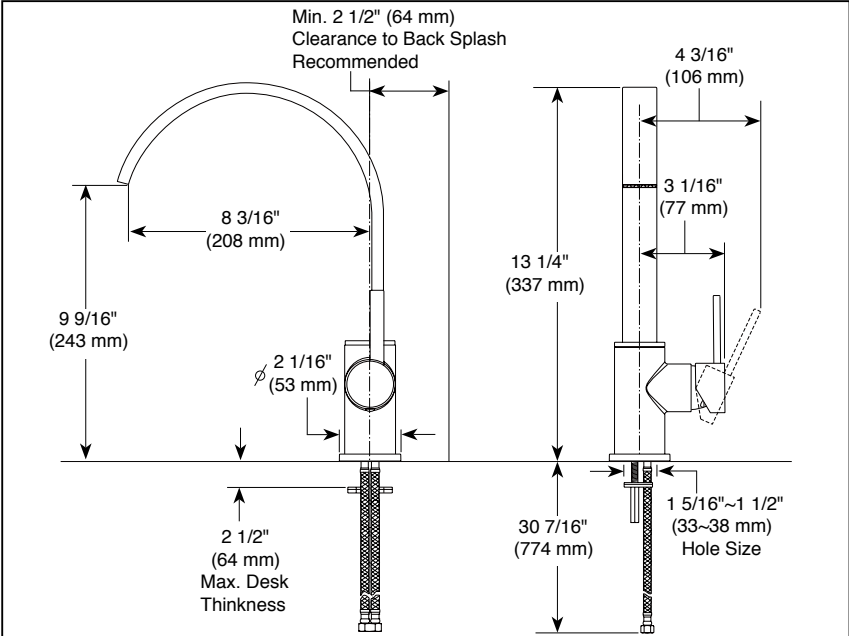

Mounting with escutcheon plate:

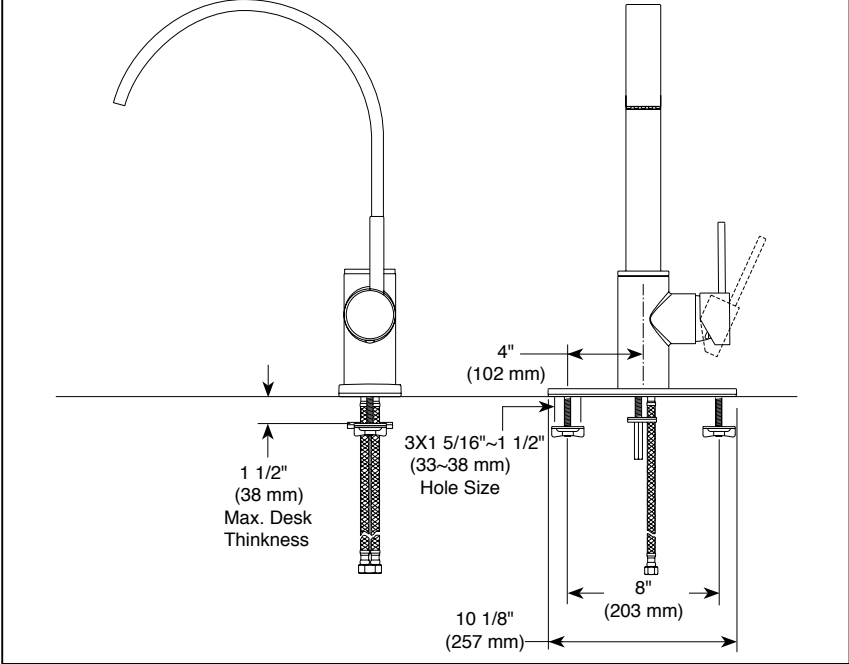

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselectonline.com](http://www.specselectonline.com) for finish options and product availability.

DSP-K-26602LF Rev. A

**STANDARD SPECIFICATIONS:**

- Ceramic cartridge.
- 1 hole or 3 hole 8" installation.
- 8 3/16" (208 mm) long, 9 9/16" (243 mm) high spout, swings 360°.
- Maximum 2 1/2" (63 mm) deck thickness for 1 hole installation.
- Maximum 1 1/2" (38 mm) deck thickness for 3 hole installation.
- Cold and hot markings on handle to indicate temperature.
- Maximum flow rate 1.8 gpm @ 60 PSI.

**WARRANTY**


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries

**COMPLIES WITH**

- ASME A1 12.18.1 / CSA B125.1
- ASME A1 12.18.6

Indicates compliance to ICC / ANSI A1 17.1

Verified compliant with 0.25% weighted average Pb content regulations

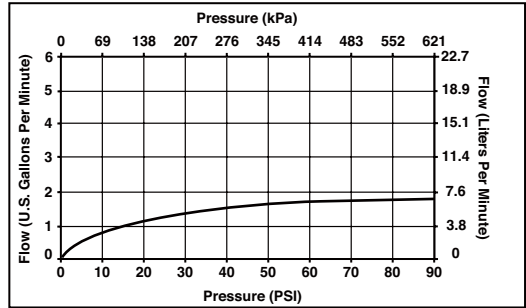

55 E. 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1  
 © 2013 Masco Corporation of Indiana