

TT2MPW HD-TVI 2MP 1080P EXIR Turret Camera




Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night, Smart IR
- EXIR technology, up to 40m IR distance
- IP66 weatherproof
- OSD menu
- Up the Coax(UTC-C)

Specifications

| Camera | |
|----------------------|--|
| Image Sensor | 2MP CMOS Image Sensor |
| Signal System | PAL/NTSC |
| Effective Pixels | 1920(H)*1080(V) |
| Min. illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR |
| Shutter Time | 1/25(1/30)s to 1/50,000s |
| Lens | 3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional) |
| | Angle of View: 103°(2.8mm), 82.2°(3.6mm), 54°(6mm), 37.7°(8mm), 24.2°(12mm), 18.8°(16mm) |
| Lens Mount | M12 |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360° |
| Synchronization | Internal synchronization |
| Video Frame Rate | 1080p@25fps/1080p@30fps |
| HD Video Output | 1 Analog HD output |
| S/N Ratio | >62dB |
| General | |
| Operating Conditions | -20 °C - 45 °C (-4 °F - 113 °F), Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC ± 15% |
| Power Consumption | Max. 4W |
| Protection Level | IP66 |
| IR Range | Up to 40m |
| Dimension | Φ126.7 × 102.41 mm(Φ4.99" × 4.03") |
| Weight | 350 g |

Dimensions

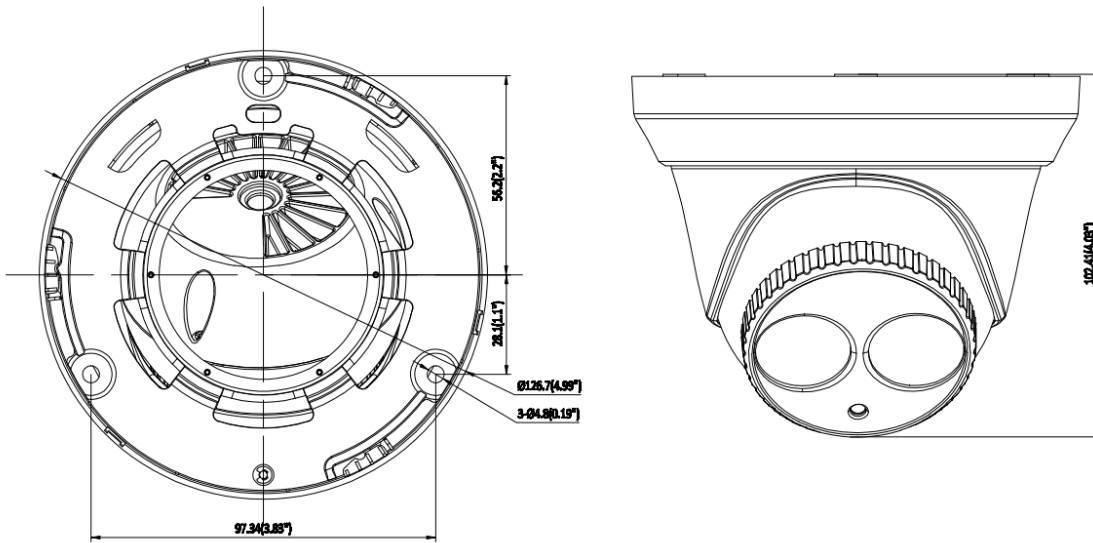

Accessories



1272ZJ-130-TRL
Wall Mounting



1275ZJ
Vertical Pole Mounting



1276ZJ
Corner Mounting



1H18
Video Balun



X41T
Camera Tester



1280ZJ-M
Junction box



1281ZJ-M
Inclined Ceiling Mounting