

NOTES: UNLESS OTHERWISE SPECIFIED
 1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD35-0000.





2. MATERIAL SPECIFICATIONS:
 BODY: BRASS PER ASTM B16
 CONTACT: COPPER ALLOY
 INSULATOR: TEFLON PER ASTM D1710

3. FINISH SPECIFICATIONS:
 CONTACT: GOLD PER ASTM B488 OVER COPPER PER ASTM B734.
 BODY: TRI-METAL

4. ELECTRICAL SPECIFICATIONS:
 FREQUENCY RANGE: DC-12.4GHz

[5] CORRECT THREAD LENGTH FOR MATING WITH WINCHESTER ELECTRONICS
 QC-SMA PLUGCONNECTORS.

REV	DESCRIPTION	BY DATE	APPD
03	EW/R06-465	PSM 10/03/06	DCam

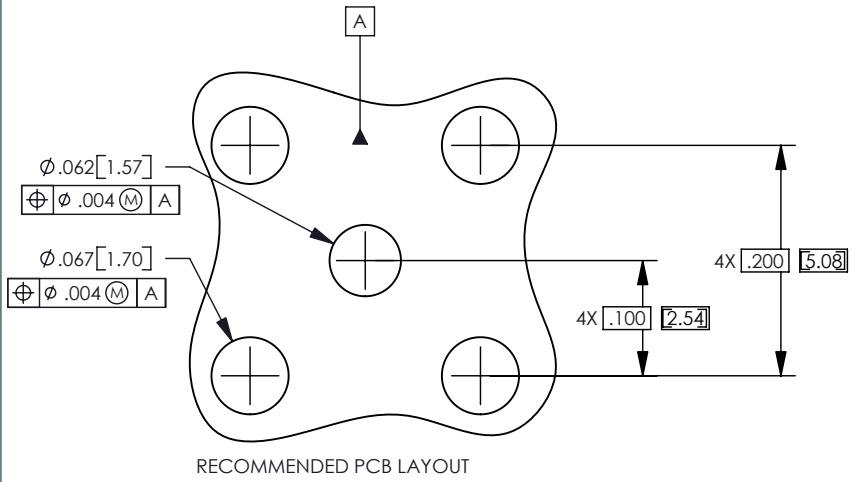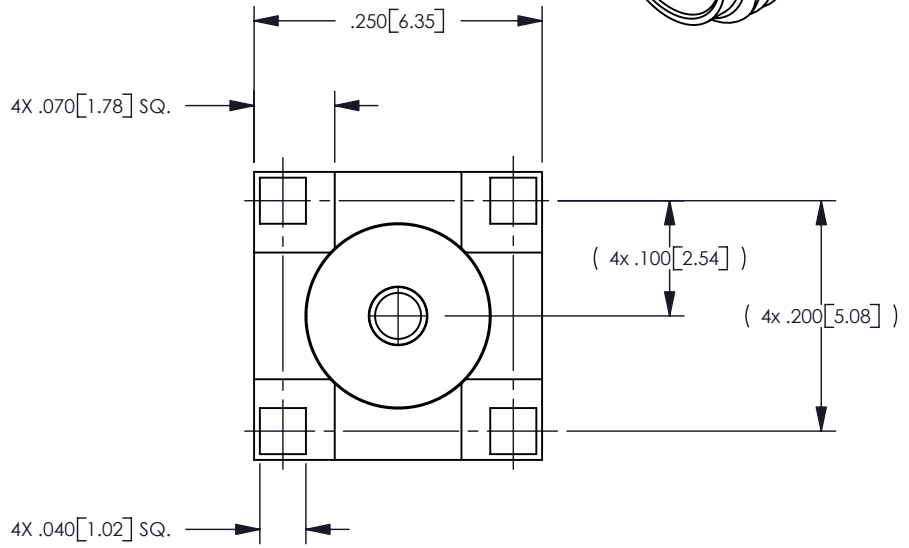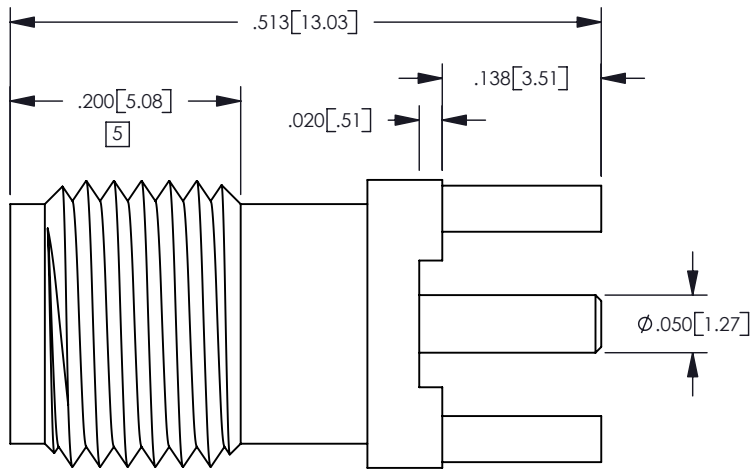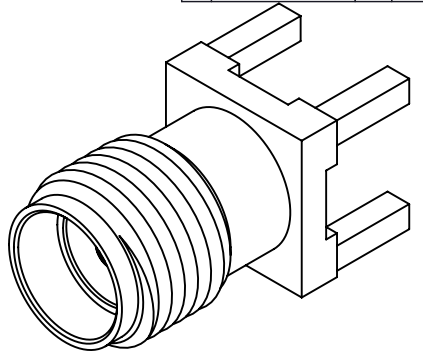

CATALOG P/N: 351-060-00407R

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX ± .01 [0.3] .XXX ± .005 [0.13] .XXXX ± .XXXX ANGLES: ± 2° SCALE: 6:1				 Winchester Electronics Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER DRAWING				SMA PWB JACK			
DRAWN PSM	DATE 01/30/06	APPROVED WPM	DATE 10/03/06	A SD351-060-00407R SHT 1 OF 1 REV 03			
APPROVED M.AYUB	DATE 10/03/06	APPROVED R.L.	DATE 10/03/06				