


REV	DESCRIPTION	BY	DATE
D	EDR 20.61	DRN	4/19/04

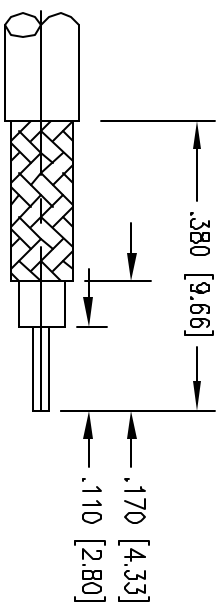

## CABLE TRIMMING DIMENSIONS

- ### 3. ELECTRICAL:

IMPEDANCE: 50 OHMS NOMINAL

FREQUENCY RANGE: 0 TO 18.0 GHz

4. FOR USE WITH RG-316 DOUBLE SHIELDED CABLE OR EQUIVALENT.

5. FOR CABLING PROCEDURES USE CAP 9-04 WITH TRIMMING DIMENSIONS SHOWN.

PER: ISSUE: Y1 4.51H - 199.4 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMALS .XX ± .01 (0.254) FRACTIONS 3/32 ± .005 (0.127) ANGLES ± 1° SIZES		WINCHESTER ELECTRONICS 62 Barnes Industrial Road North Wallingford, CT 06495	
CUSTOMER DRAWING		TITLE SMA STRAIGHT PLUG	
DWN. 1/19/88 DATE	ISSUED CCA DATE	7/20/88 DATE	1/1/88 DATE
APPROVED CEM 7/20/88 DATE	APPROVED DATE	A	SDJSD-500-063.1H QTY. 1 OF 1 REV. 0