


## 4K HDR 4:4:4 60Hz HDMI Cable with CL3 Rating

EXP-HDMI-H2-xM

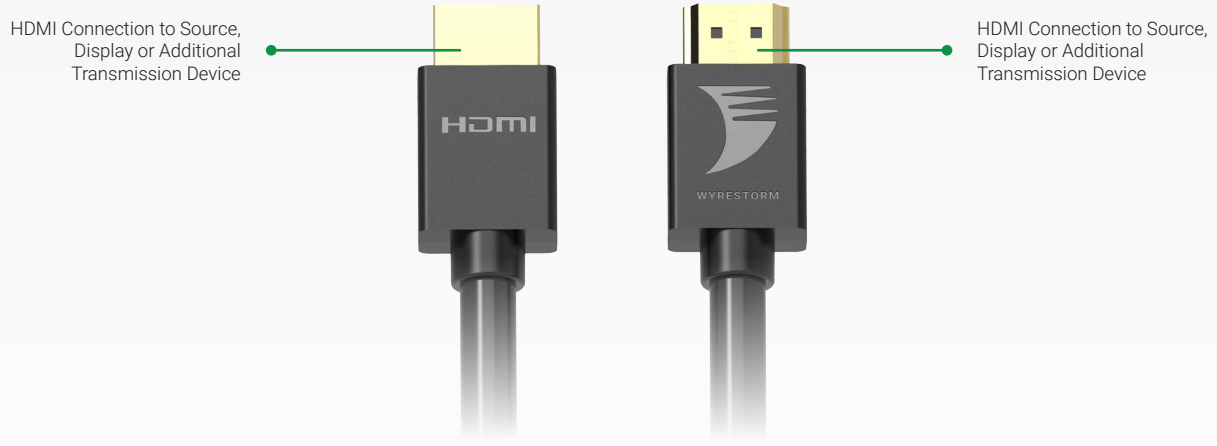

2160p  
4:4:4 60 HDR HDMI HDCP 2.2

*WyreStorm - Powerful. Reliable. Simple.*

### Introduction

WyreStorm HDMI cables are designed to meet the high bandwidth requirements demanded by the latest 4K UHD devices in commercial and residential applications. Our cables are tested using WyreStorm products to ensure continued compatibility with all 4K UHD and HD devices and provide a lifetime of perfect device connectivity.

### Key Features

- High Speed HDMI Performance: 18Gbps 4K/60 4:4:4 with 10-bit HDR at 60Hz
- Flexible, durable cable jacket with kink protection
- Compatible with all current and emerging HDR standards at up to 60Hz:-HLG (Hybrid Log Gamma)-HDR-10 and HDR-10+Dolby VisionPQ (Perceptual Quantizer)SL-HDR-1
- ARC and CEC compatible for true native HDMI communication
- 99% oxygen free solid copper core
- HDMI v2.0, v1.4 & v1.3 support
- Support of passive HDMI communication standards such as ALLM and VRR
- Available in 0.5m, 1m, 2m, 3m and 5m lengths

### In the Box

1x EXP-HDMI-H2-xM

# Specifications

<b>Audio and Video</b>	
<b>Inputs</b>	1x HDMI In: 19-pin type A
<b>Outputs</b>	1x HDMI Out: 19-pin type A
<b>Output Video Encoding</b>	Uncompressed
<b>Encoding Data Rate</b>	18Gbps
<b>End to End Latency</b>	Zero
<b>Audio Formats</b>	2ch PCM   Multichannel: LPCM and Up to DTS-X and Dolby Atmos
<b>Video Resolutions (Max)</b>	1920x1080p @240Hz 8bit RGB 2560x1440p @120Hz 8bit RGB 4096x2160p @60Hz 10bit HDR 4:2:0 4096x2160p @60Hz 12bit HDR 4:2:2 4096x2160p @60Hz 10bit HDR 4:4:4 4096x2160p @60Hz 10bit RGB
<b>Supported Standards</b>	DCI   RGB   HDR   HDR10   Dolby Vision up to 30Hz   HLG   BT.2020   BT.2100
<b>Maximum Pixel Clock</b>	600MHz
<b>Communication and Control</b>	
<b>HDMI</b>	TMDS   HDCP 2.2   EDID
<b>Supported Features</b>	Ethernet   Audio Return Channel (ARC)   CEC Auto Low Latency Mode (ALLM)   Variable Refresh Rate (VRR)
<b>Environmental</b>	
<b>Operating Temperature</b>	32°F ~ 113°F (0°C ~ 45°C)   10% ~ 90%, non-condensing
<b>Storage Temperature</b>	-4°F to ~ 158°F (-20°C ~ +70°C)   10% ~ 90%, non-condensing
<b>Maximum BTU</b>	N/A
<b>Dimensions and Weight</b>	
<b>Cable Length</b>	0.5m/1.6ft   1.0m/3.2ft   2.0m/6.4ft   3.0m/9.6ft   5.0m/16ft
<b>Weight</b>	0.05kg/0.11lbs   0.09kg/0.19lbs   0.14kg/0.30lbs   0.22kg/0.48lbs   0.35kg/0.77lbs
<b>Regulatory</b>	
<b>Safety and Emission</b>	CE   FCC   RoHS

*Right Product for the Right Application.*

