

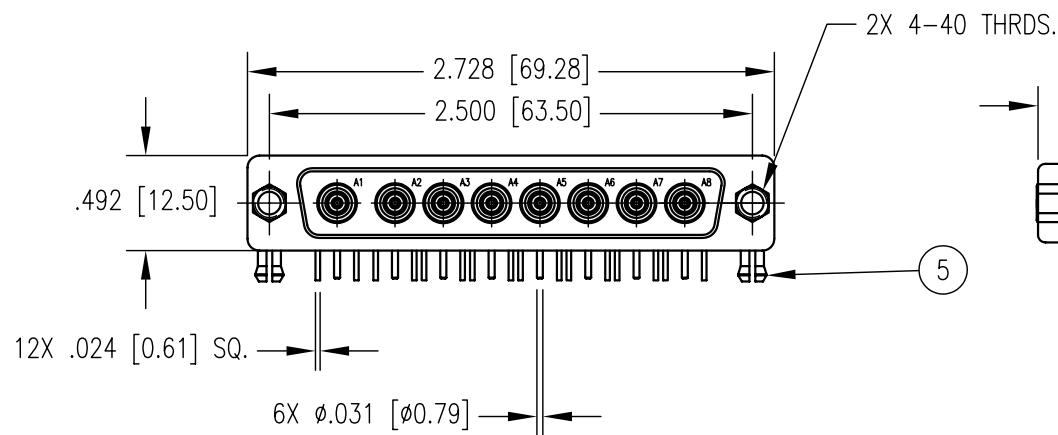
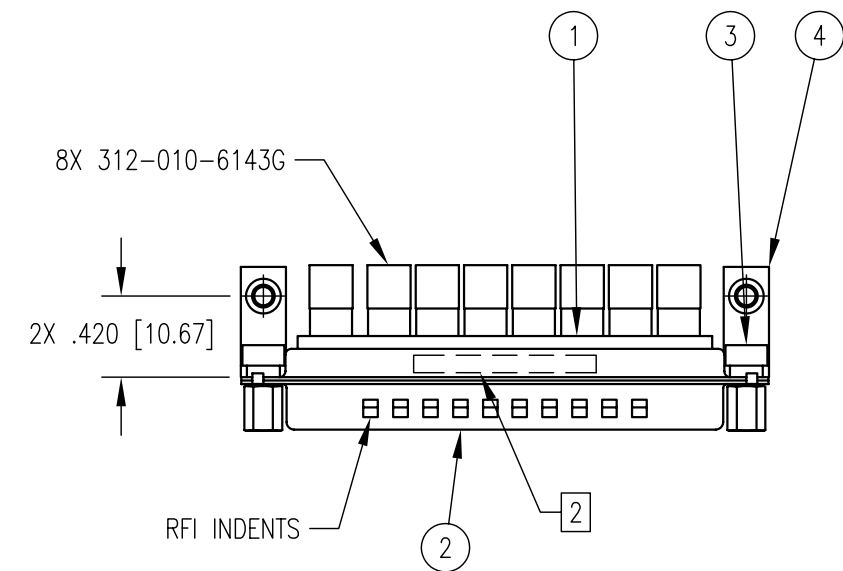


DWG. NO. SDRM8W8P-1039			
REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR8404	JMG 05/24/04	JMG

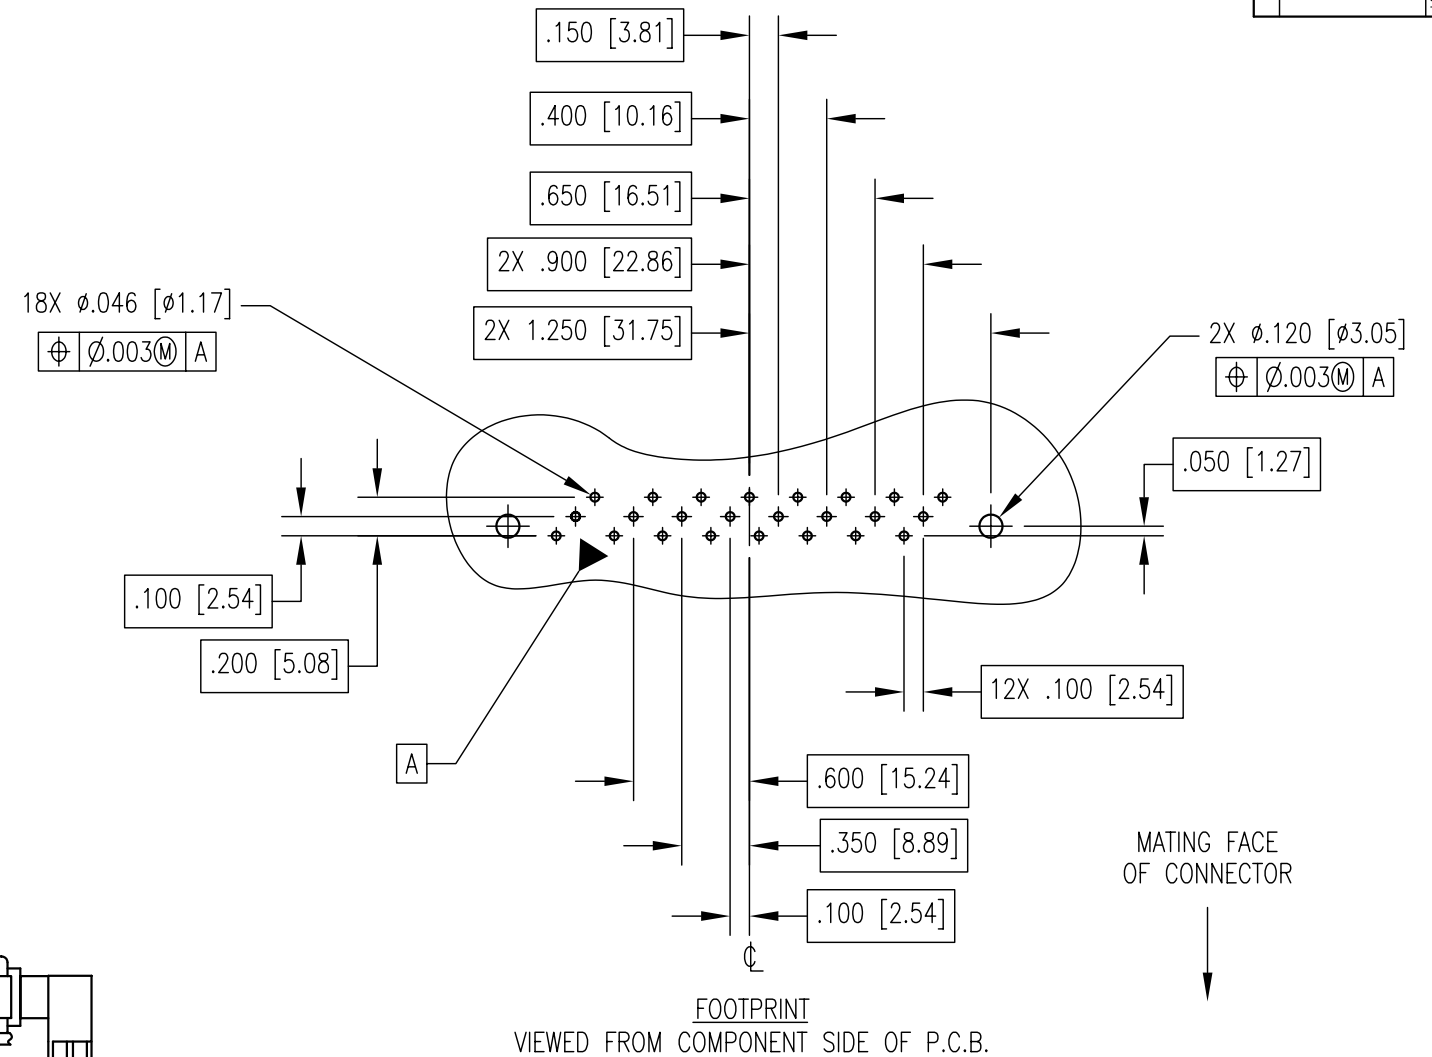

PART NO. RM8W8P-1031 SHOWN

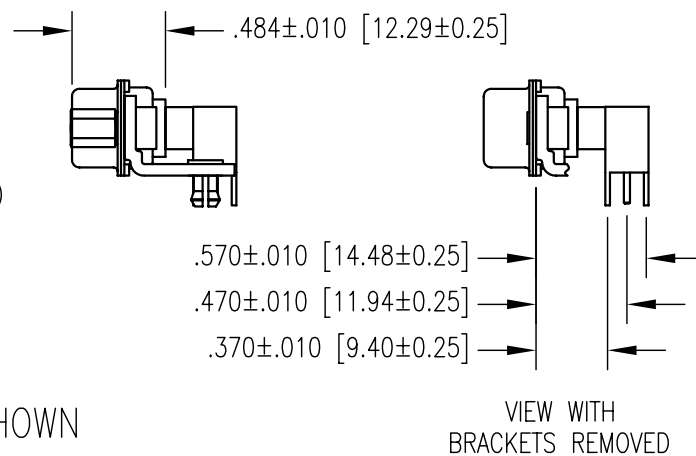


NOTES:

1. THIS CONNECTOR IS DESIGNED TO MEET THE APPLICABLE PERFORMANCE REQUIREMENTS OF MIL-DTL-24308, MS18271, DSCC 85039 AND DCSS 85047.
2. APPROXIMATE LOCATION OF MARKING AS SHOWN ON INDICATED SURFACE.

SPECIFICATIONS:  
MATERIALS & FINISHES

- |                |   |
|----------------|---|
| ① INSULATOR:   | THERMOPLASTIC POLYESTER, GLASS FILLED<br>RATED 50 KV/MM. COLOR: GREEN |
| ② SHELL:       | STEEL<br>FINISH: TIN PLATE  |
| ③ CLINCH NUTS: | BRASS<br>FINISH: TIN PLATE  |
| ④ BRACKET:     | STEEL<br>FINISH: TIN PLATE  |
| ⑤ BOARD LOCKS: | PHOSPHOR BRONZE<br>FINISH: TIN PLATE                                  |

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR INCHES/MM TOLERANCES: DECIMALS XX ± .01 [0.254] XXX ± .005 [0.127] ANGLES ± 2° SCALE: 1:1				<b>NORTHROP GRUMMAN</b>  Winchester Electronics 62 Barnes Industrial Road North Wallingford, CT 06492				
<b>CUSTOMER DRAWING</b>				TITLE  8W8P CONNECTOR WITH 6 31 SERIES				
DRAWN CWB	DATE 05/17/04	CHECKED SD	DATE 5/24/04	B	SDRM8W8P-1039	SHT. 1	OF 1	REV. A
APPROVED KJT	DATE 5/24/04	APPROVED C.Booth	DATE 05/24/04					