


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	07/10/14	AM

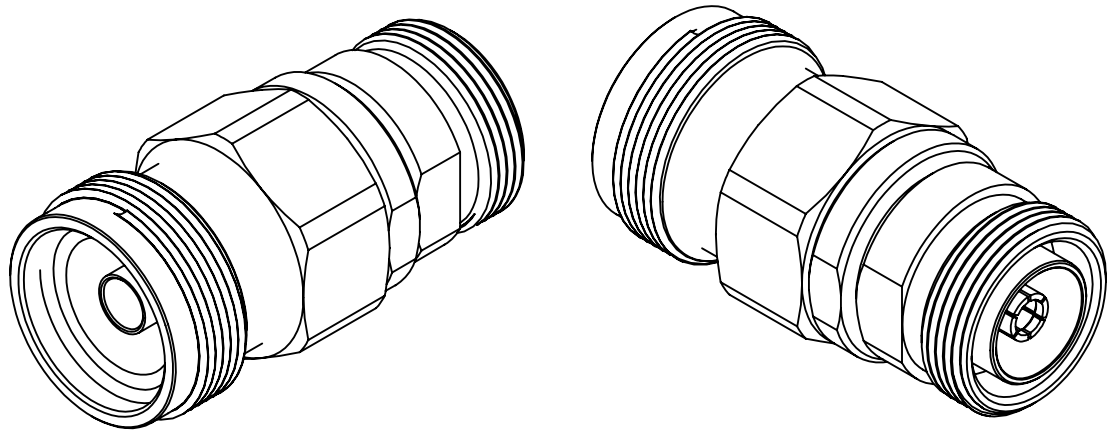

ENGINEERING DATA


ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 6 GHz



MECHANICAL:
INTERFACE: 7-16(f) PER IEC 169-4 (SOLID OUTER CONTACT)
MEIA-875(f) PER TRU SPEC INT-MEIA-875

MATERIAL:
GASKET: SILICONE RUBBER
INSULATORS: TEFLON
7-16 CONTACT: BERYLLIUM COPPER
OTHER METAL PARTS: BRASS

FINISH:
ALL METAL PARTS: SILVER PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.

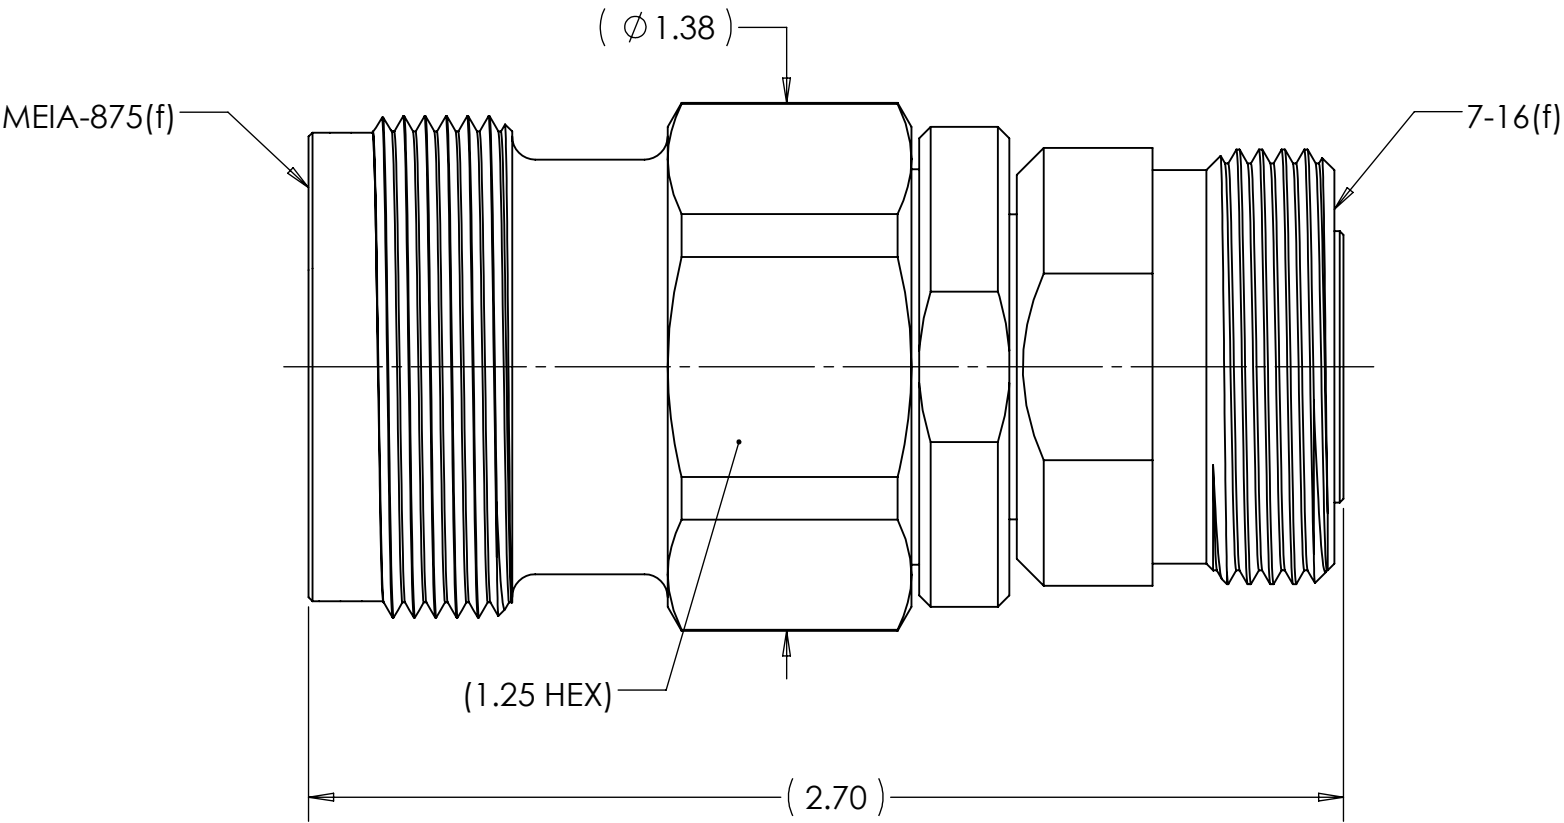

MATERIAL	DO NOT SCALE DRAWING		DRAWN AM	DATE 07/08/14	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. AM	DATE 07/08/14		
	TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2°		MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL, RF MEIA-875(f) to 7-16(f) ADAPTER	
	MACHINED SURFACES: 63/√		OTHER APPR.	DATE		
COMMENTS:		THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-11891	REV -
surface area: sq inch		weight: 0.56 lbs		CAGE CODE: 92180		SCALE: 2:1
				SHEET 1 OF 1		