


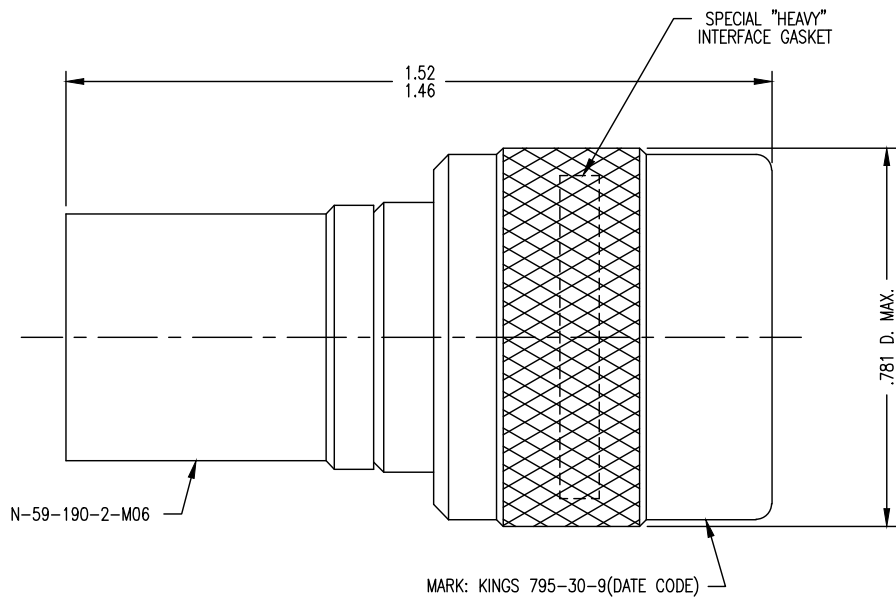

NOTES:

- FOR USE WITH RG-393/U CABLE.
- FOR CABLING INSTRUCTIONS SEE CP-5402.
- FOR CRIMPING USE DIE KTH-2105.
- INTERFACE PER MIL-STD-348, FIG. 302-1.
- CENTER CONTACT (1-856-14MA9) SUPPLIED UNASSEMBLED.
- MARK PACKAGE: KINGS 795-30-9 (DATE CODE)
- MATERIALS:
 - INSULATOR: TEFLON, ASTM D1710
 - GASKET: SIL. RUB., A-A-59588
 - K-GRIP SLEEVE: COM. BRONZE ASTM B140
 - OUTER CONTACT } BER. COP., ASTM B196
 - SPRING WASHERS }
 - ALL OTHER PARTS: BRASS, ASTM B16
- FINISHES:
 - CENTER CONTACT: .000050 MIN GOLD PLATE, PER ASTM B488 OVER
 - .000050 MIN. NICKEL PER AMS-QQ-N-290 (RoHS)
 - OUTER CONTACT & SPRING WASHER: .00020 MIN SILVER PLATE PER ASTM B700 OVER
 - .000020 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
 - ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290
 - OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50~W
 - VOLTAGE RATING: 1000 VOLTS RMS
 - FREQUENCY RANGE: DC TO 11 GHZ
- WEIGHT: 29.5 RGAMS

795-30-9

REVISIONS

ISSUE	CHANGES
0	ER 36902 TML 03/26/01
1	CN 38130 C TML 03/26/01
C	REVISED PER DMF304 & ER040644 KPL 02/09/12

CUSTOMER SALES DRAWING

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE 4:1

APPROX SURFACE AREA

CAGE CODE: 91836

REF: BOEING

PLUG, C

DRAWN	ME	DATE	05/24/95
DESIGN	MJB	DATE	05/24/95
APPR.		DATE	

KINGS
by WINCHESTER
FIRST DESIGN
Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492

795-30-9