

EML4 LED Compact Emergency Light

The EML4 LED emergency light combines a low-profile, compact design in an affordable package. The EML4 Series is available in white and offers universal mounting, a test button with AC indicator, and damp location listing. With fully adjustable heads, the EML4 Series complements any design application.

Construction

- Injection molded thermoplastic ABS housing.
- UL-94 V-0 Flame rating - Flame Retardant
- Adjustable heads for aiming light where required
- Head tilt: +45°/-10°
- Head rotation: ±30°
- Operating temperature: 32°F - 104°F (0°C - 40°C)

Optical System

- Precision engineered Prismatic Lens

Electrical

- Input power 2.1W at 120/277
- Minimum 90 minute capacity on emergency mode

Mounting and Installation



- Easy installation into a standard junction box or conduit
- Mounting plate secures to the wall first for ease of wiring and installation
- Damp location rated

Listings

- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions

Finish

- White unpainted ABS Plastic

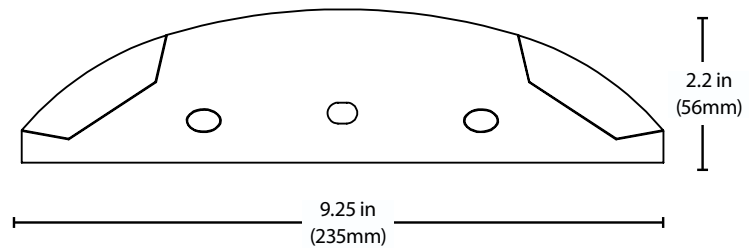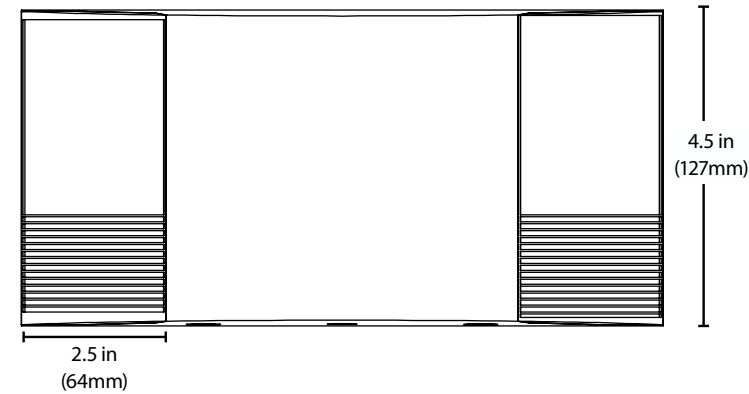

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	2.1
Delivered Lumens (Lm)	158
System Efficacy (Lm/W)	76.2
Correlated Color Temp (K)	6000K
Color Rendering Index (CRI)	83
Emergency Operation	Minimum 90 Minutes




+45°/-10° TILT WITH ±30° ROTATION

Applications



The EML series can be installed in many applications such as corporate offices, studios, lecture halls etc.

Installation

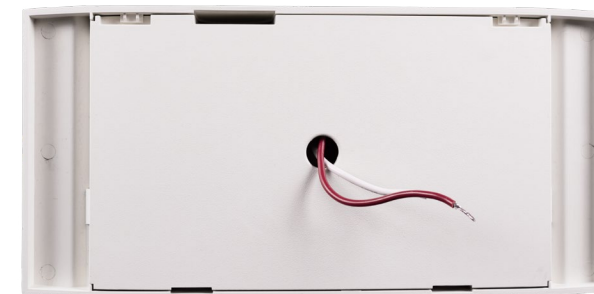

The EML4 has a mounting plate that installs to the wall for easy wiring and installation.



The EML4 has adjustable heads to aim light where it is most needed. With +45°/-10° tilt and ±30° rotation to ensure the light is aimed where it is required.

Ordering Information			
Series	Version	Voltage	Housing Color
EML4	10 (1.0)	UNV (120/277VAC)	WH (white)