
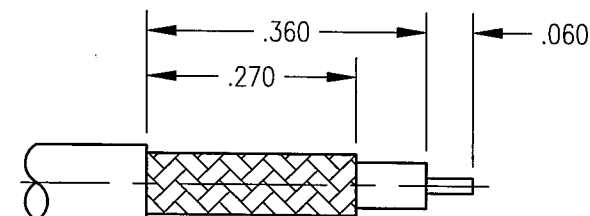


DWG. NO. 512-900-0630H			
REV	DESCRIPTION	BY DATE	APPD
C	NPR 2002	JWH 9/22/00	<i>[Signature]</i>

CAP SHIPPED LOOSE

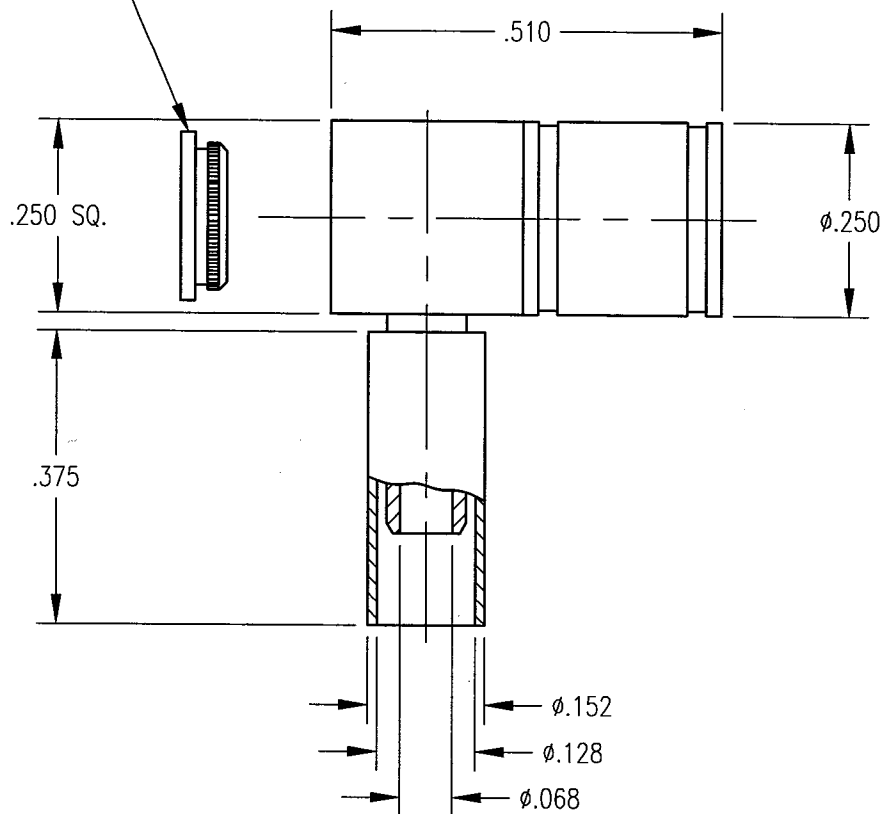

CABLE TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:

CONTACT & RING: BERYLLIUM COPPER PER ASTM B196
ALL OTHER METAL PARTS: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710

2. FINISHES:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER
.000100 MIN. NICKEL PER QQ-N-290

3. DESIGNED FOR USE WITH RG-316 CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURE SEE NO. 9-06.

5. CRIMP USING HEX DIE SIZE .128

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMALS .XX ± .01/.0254 XXX ± .005/.127 ANGLES ± 2° SCALE: 4:1				Litton Winchester/Retconn 400 Park Road Watertown, Connecticut 06795	
CUSTOMER DRAWING				TITLE SMB STRAIGHT PLUG	
DRAWN JWH	DATE 9/22/00	CHECKED WYF	DATE 9/27/00	APPROVED JWH	DATE 9/27/00
A 512-900-0630H				SHT. 1 OF 1	REV. C