


DWG. NO. 363-922-2401R			
REV	DESCRIPTION	BY DATE	APPD
E	ECR 7404	7/00	JH

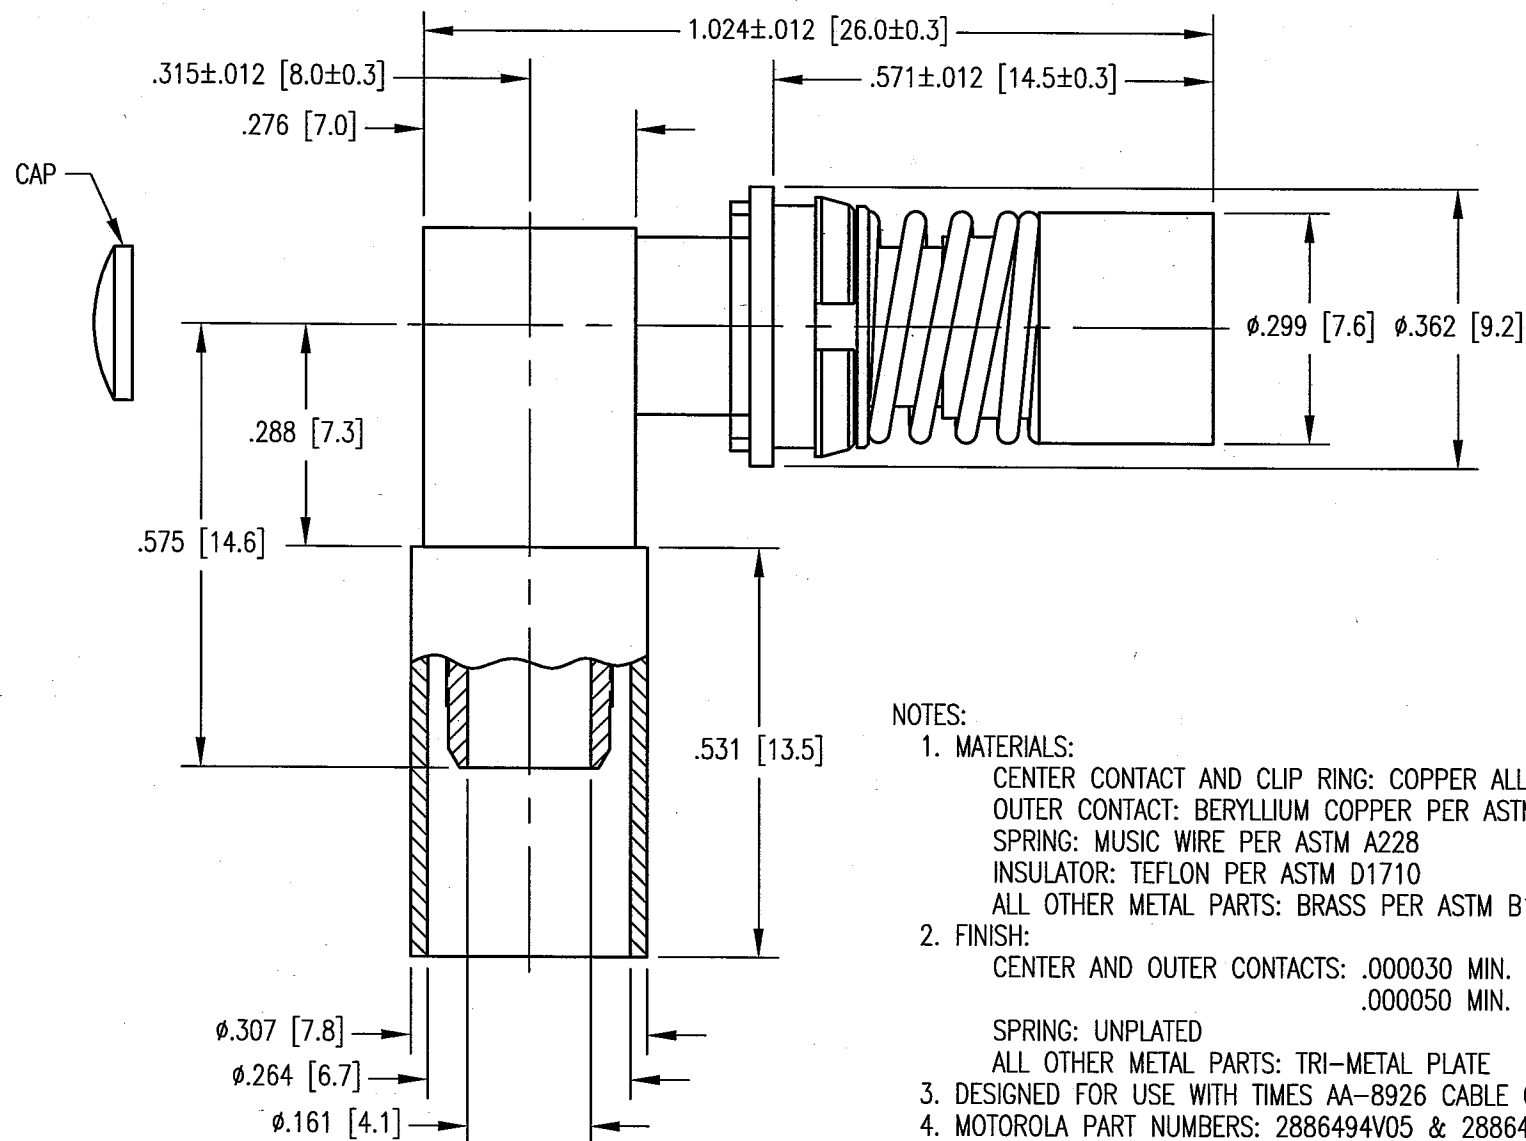

NOTES:

1. MATERIALS:

CENTER CONTACT AND CLIP RING: COPPER ALLOY
 OUTER CONTACT: BERYLLIUM COPPER PER ASTM B194
 SPRING: MUSIC WIRE PER ASTM A228
 INSULATOR: TEFLON PER ASTM D1710
 ALL OTHER METAL PARTS: BRASS PER ASTM B16

2. FINISH:

CENTER AND OUTER CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

SPRING: UNPLATED


ALL OTHER METAL PARTS: TRI-METAL PLATE

3. DESIGNED FOR USE WITH TIMES AA-8926 CABLE OR EQUIVALENT.


4. MOTOROLA PART NUMBERS: 2886494V05 & 2886494V19

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]				NORTHROP GRUMMAN			
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2°				Winchester Electronics 400 Park Road Watertown, CT 06795			
CUSTOMER DRAWING		TITLE		BMA RIGHT ANGLE RECEPTACLE (SNAP-FIT)			
DRAWN JED	DATE 10/10/00	CHECKED JH	DATE 10/13/00	A 363-922-2401R			
APPROVED KJT	DATE 10/13/00	APPROVED JMC	DATE 10/13/00	SHT.	OF	REV.	
				1	2	E	

DWG. NO. 363-922-2401R			
REV	DESCRIPTION	BY DATE	APPD
	SEE SHEET 1		

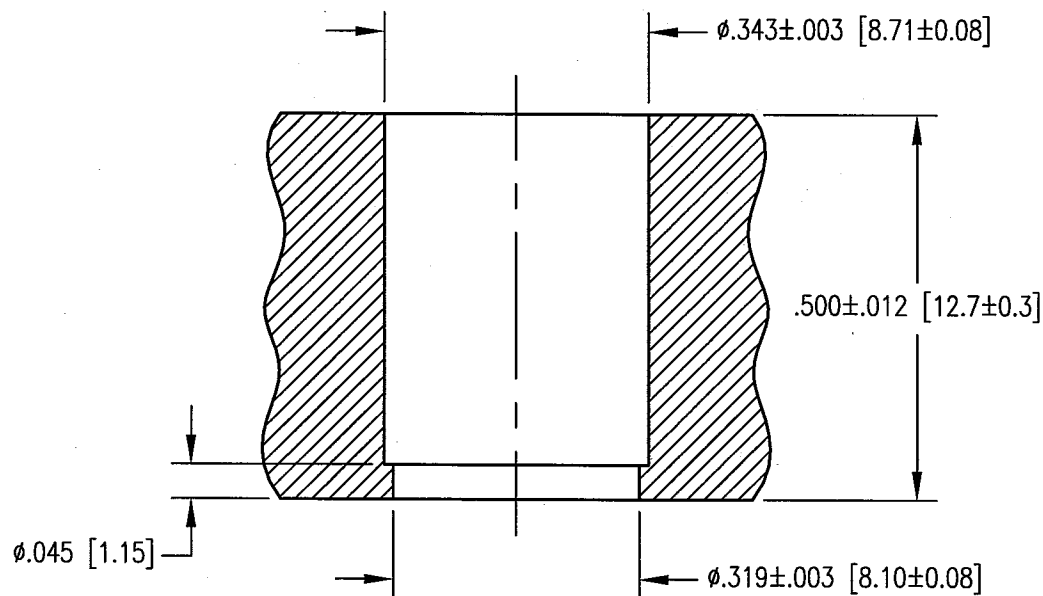

RECOMMENDED MOUNTING HOLE

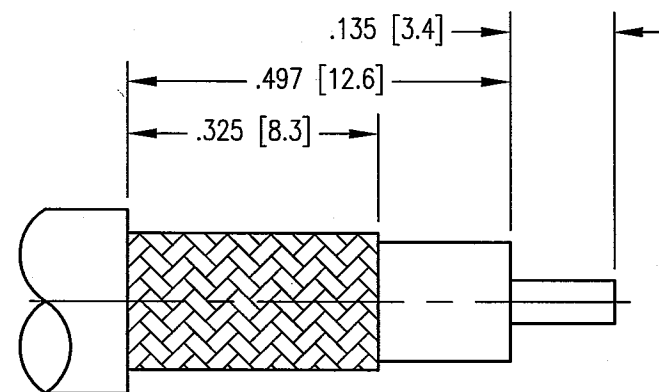

CABLE TRIMMING DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]				NORTHROP GRUMMAN			
TOLERANCES: DECIMALS .XX $\pm$.01 [0.254] .XXX $\pm$.005 [0.127] ANGLES $\pm$ 2°				Winchester Electronics 400 Park Road Watertown, CT 06795			
CUSTOMER DRAWING				TITLE BMA RIGHT ANGLE RECEPTACLE (SNAP-FIT)			
DRAWN	DATE	CHECKED	DATE	A 363-922-2401R			
JED	10/10/00	JWH	10/14/00	SHT. OF REV. 2 2 E			
APPROVED	DATE	APPROVED	DATE				
JMC	10/14/00	KJT	10/14/00				