

NAPOLEON

AIR CONDITIONERS

AIR CONDITIONERS
napoleon.com



THINK DIFFERENT. THINK NAPOLEON.

Napoleon's central air conditioners boast quiet operation and come in a charcoal grey color, to effortlessly blend into the landscape of your home.

Napoleon offers 13 SEER, 14 SEER and 16 SEER air conditioners, making it easy to find one to accommodate your home. Made with superior eco-friendly technology and design, Napoleon's central air conditioners meet all industry refrigerant standards. Each unit is backed with a 10 Year Limited Compressor warranty and 10 Year Parts warranty, as we guarantee home comfort and satisfaction for years to come.

Enjoy the long hot days of summer with the quality and reliability of a Napoleon air conditioner.

That's Napoleon.



SWEPT FAN BLADE TECHNOLOGY

Napoleon air conditioners are made with modern fan blade technology. The unique shape of the blades make Napoleon air conditioners quiet as they efficiently provide increased airflow. With quality and longevity in mind, Napoleon's swept fan blades are made with an aluminum or plated steel hub (depending on the size) and embossed structural steel blades to ensure long-lasting durability.




Napoleon air conditioners use a 2 or 4 blade fan to meet the cooling needs of the unit. Consult your Napoleon HVAC Dealer to learn which unit best suits your home.



FORWARD THINKING

Napoleon air conditioners are designed with your home in mind. Finished in a modern charcoal grey, these units blend into the surrounding landscape. Their WHISPER QUIET™ operation is rated as low as 74.0 dBA, so your day or night is not interrupted.

Napoleon air conditioners are built to include Emerson EK filter driers; the highest quality filter drier in the industry. A filter drier is an extremely beneficial component to your system that works to remove unwanted acids, dirt, particle debris and other contaminants from the refrigerant to extend the life of your air conditioner.

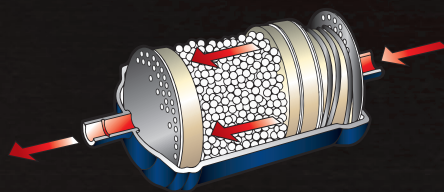

Emerson EK Liquid
Line Filter Drier

ENVIRONMENTALLY RESPONSIBLE

Napoleon air conditioners are made with the environmentally conscious, chlorine-free refrigerant R-410A. Refrigerants are liquids that are housed within the coils of your air conditioner to cool and dehumidify your home.

By using a refrigerant that is chlorine-free, Napoleon air conditioners do not contribute to ozone depletion and offer higher SEER (Seasonal Energy Efficiency Ratio) ratings. In addition, R-410A refrigerant reduces power consumption and increases the durability of your compressor to extend the life of your Napoleon air conditioner.





OUR DIFFERENCE IS IN THE DETAILS

4 WAYS TO COUNT ON THE BEST




COMPRESSOR
LIMITED WARRANTY



PARTS
LIMITED WARRANTY

*10 year when registered (5 year standard)

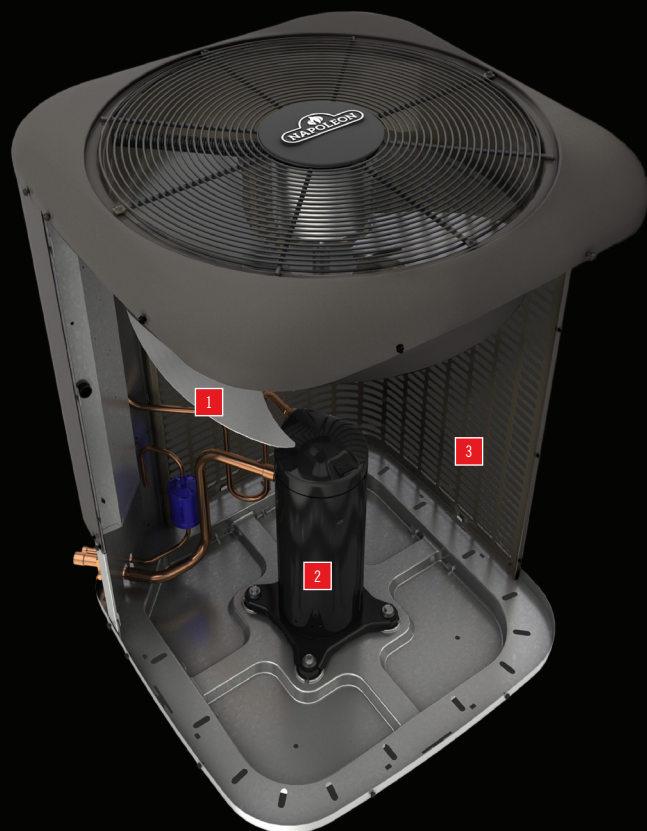

1 Swept Fan Blades

- Contoured blades provide quieter operation
- Produces efficient air flow
- Fans are made up of 2 or 4 fan blades to accommodate the cooling capacity of the unit

2 Scroll Compressor

- Industry-leading **Copeland** scroll compressor
- Low vibration creates quieter operation
- Contains built-in enhanced temperature and pressure protection

3 Extruded Slot Side Panels

- Extruded slot side panels protect the inside of your Napoleon air conditioner while allowing the right amount of air flow
- Powder coated cabinet panels withstand 1000 hours of salt spray testing


4 Micro-Channel Coils

- All-aluminum coil construction will last longer than coils made of copper
- Coils are more efficient and compact to allow for smaller air conditioner size

*See warranty for details

ADVANCED MICRO-CHANNEL COIL TECHNOLOGY

Napoleon Air Conditioners are made with superior micro-channel condenser coils. Condenser coils wrap around the inside of your air conditioner and house the refrigerant. Napoleon's micro-channel condenser coils are compact, allowing for a smaller air conditioner size while using substantially less refrigerant. Napoleon micro-channel condenser coils are all aluminum, easy to maintain and will last longer than those made with copper.

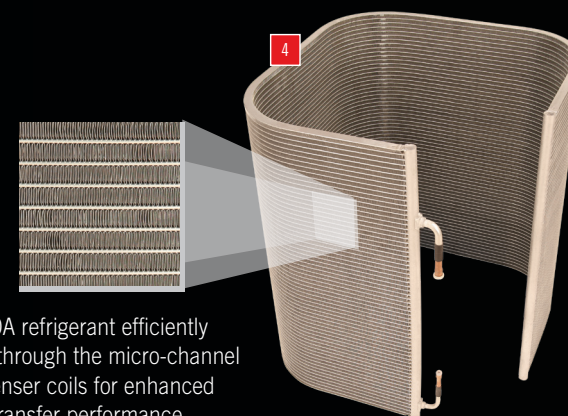

R-410A refrigerant efficiently flows through the micro-channel condenser coils for enhanced heat transfer performance.

SPECIFICATIONS

| COOLING CAPACITIES | NT13A018C-1 | NT13A024C-1 | NT13A030C-1 | NT13A036C-1 | NT13A042B-1 | NT13A048B-1 | NT13A060B-1 |
|-----------------------------|-------------------|-------------------|-------------------|-----------------|-----------------|-----------------|-----------------|
| Size | 1.5 T | 2.0 T | 2.5 T | 3.0 T | 3.5 T | 4.0 T | 5.0 T |
| Capacity BTU/H | 18,000 | 23,200 | 28,600 | 33,800 | 37,800 | 45,000 | 53,500 |
| SEER | 13 | 13 | 13 | 13 | 13 | 13 | 13 |
| Ref. | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A |
| Volt-Hz-Phase | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 |
| Sound Pressure level dB(A)* | 69.3 | 70.3 | 71.4 | 74* | 77.1* | 77.4 | 77.5* |
| Compressor LRA (A) | 38.5 | 46 | 58 | 72.2 | 109 | 124 | 152.5 |
| Compressor RLA (A) | 7.05 | 9.5 | 10.2 | 14.1 | 16.7 | 18.5 | 23.7 |
| Fan Blade Dia/qty Blades | 18"/4 | 18"/4 | 18"/4 | 24"/2 | 24"/2 | 24"/2 | 24"/2 |
| Condenser Fan FLA/HP/RPM | 0.65 / 1/8 / 1075 | 0.65 / 1/8 / 1075 | 0.65 / 1/8 / 1075 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 |
| MCA | 9.5 | 12.5 | 13.4 | 18.4 | 21.7 | 23.9 | 30.4 |
| Max Fuse/Breaker (A) | 15 | 20 | 20 | 30 | 35 | 40 | 50 |
| Liquid Line (in) | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 |
| Suction Line (in) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| DIMENSIONS | NT13A018C-1 | NT13A024C-1 | NT13A030C-1 | NT13A036B-1 | NT13A042B-1 | NT13A048B-1 | NT13A060B-1 |
| Width (in) | 24 | 24 | 24 | 29.5 | 29.5 | 29.5 | 29.5 |
| Height (in) | 27 | 27 | 27 | 27 | 27 | 38.5 | 38.5 |
| Depth (in) | 24 | 24 | 24 | 29.5 | 29.5 | 29.5 | 29.5 |

*Sound pressure level data is extrapolated based on internal compressor and fan motor data and not tested under AHRI standard 275 (2010).

| COOLING CAPACITIES | NT14A018B-1 | NT14A024B-1 | NT14A030B-1 | NT14A036B-1 | NT14A042B-1 | NT14A048B-1 | NT14A060B-1 | NT16A018B-1 | NT16A024B-1 | NT16A030B-1 | NT16A036B-1 | NT16A042B-1 | NT16A048B-1 | NT16A060B-1 |
|--------------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Size | 1.5 T | 2.0 T | 2.5 T | 3.0 T | 3.5 T | 4.0 T | 5.0 T | 1.5 T | 2.0 T | 2.5 T | 3.0 T | 3.5 T | 4.0 T | 5.0 T |
| Capacity BTU/H | 18,800 | 23,400 | 28,600 | 33,800 | 38,000 | 44,000 | 53,500 | 19,100 | 24,000 | 29,400 | 35,600 | 41,500 | 45,000 | 56,500 |
| SEER | 14 | 14 | 14.5 | 14 | 14 | 14 | 14 | 15 | 15 | 15 | 15 | 15 | 15 | 14.5 |
| Ref. | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A | R-410A |
| Volt-Hz-Phase | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 | 208/230-60-1 |
| Compressor LRA (A) | 56.3 | 62.9 | 67.8 | 72.2 | 109 | 123.9 | 152.5 | 56.3 | 62.9 | 67.8 | 72.2 | 109 | 123.9 | 152.5 |
| Compressor RLA (A) | 9 | 10.9 | 12.8 | 14.1 | 16.7 | 17 | 23.7 | 9 | 10.9 | 12.8 | 14.1 | 16.7 | 17 | 23.7 |
| Fan Blade Dia/qty Blades | 18"/4 | 18"/4 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 | 24"/2 |
| Condenser Fan FLA/HP/RPM | 0.7 / 1/8 / 1075 | 0.7 / 1/8 / 1075 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 | 1.1 / 1/5 / 850 | 0.65 / 1/8 / 850 | 0.65 / 1/8 / 850 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 | 0.8 / 1/6 / 850 | 1.1 / 1/5 / 850 | 1.1 / 1/5 / 850 |
| MCA | 12 | 14.3 | 16.8 | 18.4 | 21.7 | 22.1 | 30.7 | 11.9 | 14.3 | 16.8 | 18.4 | 21.7 | 22.4 | 30.7 |
| Max Fuse/Breaker (A) | 20 | 25 | 25 | 30 | 35 | 35 | 50 | 20 | 25 | 25 | 30 | 35 | 35 | 50 |
| Liquid Line (in) | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 |
| Suction Line (in) | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| DIMENSIONS | NT14A018B-1 | NT14A024B-1 | NT14A030B-1 | NT14A036B-1 | NT14A042B-1 | NT14A048B-1 | NT14A060B-1 | NT16A018B-1 | NT16A024B-1 | NT16A030B-1 | NT16A036B-1 | NT16A042B-1 | NT16A048B-1 | NT16A060B-1 |
| Width (in) | 24 | 24 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 |
| Height (in) | 27 | 27 | 27 | 27 | 38.875 | 38.875 | 47.75 | 27 | 27 | 27 | 38.875 | 38.875 | 47.75 | 47.75 |
| Depth (in) | 24 | 24 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 | 29.5 |

All specifications and designs can change without notice to allow for on-going product improvement. Images may not be exactly as shown. Consult your owner manual for current information. Check all local and national building codes and gas regulations. Napoleon is a registered trademark of Wolf Steel Ltd. © Wolf Steel Ltd.

NAPOLEON


CELEBRATING OVER 40 YEARS OF HOME COMFORT PRODUCTS



napoleon.com

24 Napoleon Road, Barrie, Ontario, Canada L4M 0G8
103 Miller Drive, Crittenden, Kentucky, USA 41030
7200 Trans Canada Highway, Montreal, Quebec, Canada H4T 1A3

Tel: 1-888-721-7253
hvac@napoleon.com



Authorized Dealer

All specifications and designs can change without notice to allow for on-going product improvement. Images may not be exactly as shown. Consult your owners manual for current information. Check all local and national building codes and gas regulations. Napoleon® is a registered trademark of Wolf Steel Group Inc.

Printed in Canada
ADBRNACFL
03/15/2022