



Project Name: _____
Location: _____
Item #: _____
Qty: _____

Maxx Cold V-Series 3 Door Reach-In Freezer, Bottom Mount

MVF-72FDHC



Ideal for use in restaurants, cafes, bakeries, catering businesses and more, the Maxx Cold V-Series 3 Door Reach-In Freezer is a smart investment. Offering ample storage space for frozen foods, ingredients and more, this commercial reach-in freezer measures 81"W and has a storage capacity of 65 cubic feet. Built to withstand the demands of a commercial kitchen environment, it is constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior.

FEATURES AND CONSTRUCTION

- Reach-in freezer with three self-closing, locking doors with easy-to-grip recessed handles
- Constructed of a durable, easy-to-clean stainless steel exterior and painted aluminum interior
- Includes 9 adjustable heavy-duty wire shelves
- Automatic defrost system
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters for easy mobility in your commercial kitchen
- Digital control system lets you easily adjust the temperature
- Temperature range -10°F to 10°F (-23°C to -12°C)
- LED temperature display is easy to read
- Automatic defrost system
- Automatic interior lighting

ELECTRIC

115 / 60Hz / 1Ph
Cord Length (Inches): 98.5"
Plug Type: NEMA 5-15P
Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

6 Months Parts and Labor, 1 Year Compressor Warranty

For more information, contact:
TechnicalServices@TheLegacyCompanies.com
or 877.368.2797



NOMINAL STORAGE CAPACITY

Cubic Feet: 65.01 cu. ft.


TEMPERATURE

- Holding Temperature (Fahrenheit): -10 - 10°
- Efficient forced-air refrigeration system

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

Maxx Cold V-Series 3 Door Reach-In Freezer, Bottom Mount

MVF-72FDHC

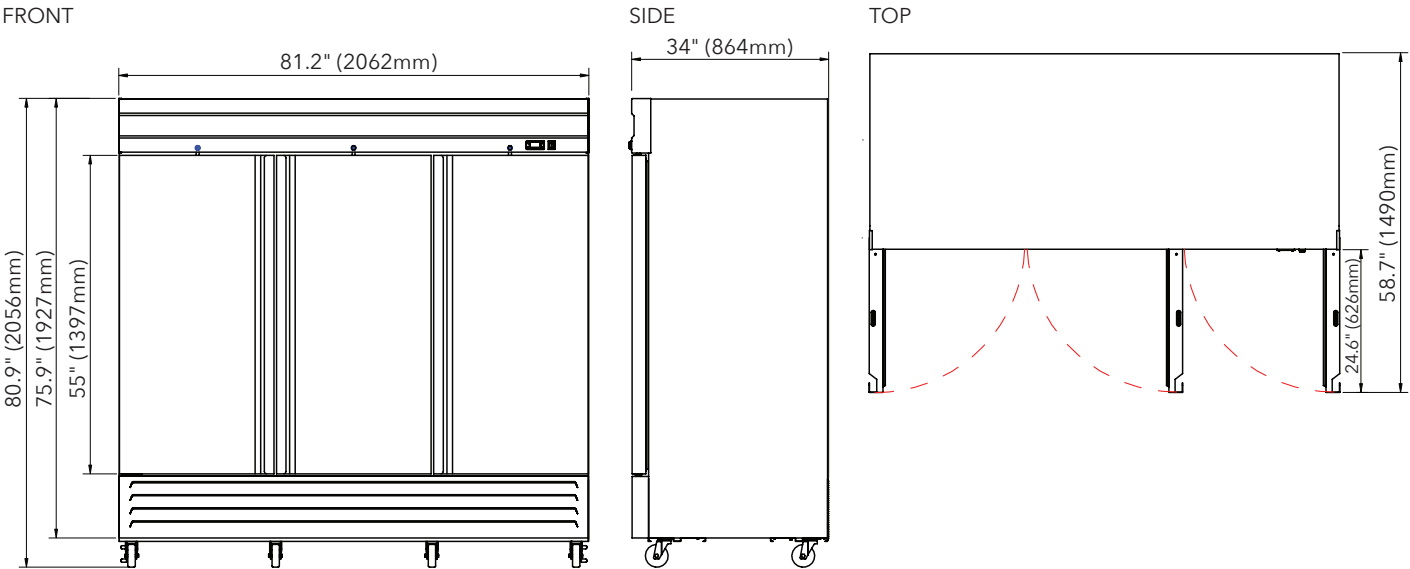

Reach-In

Doors	Shelves	Amps	Refrigerant	Dimensions	Item Weight lbs	Shipping Weight lbs
3	9	2.2A	R290 4.41 oz	34.00" x 81.20" x 80.90"	524.0	600.0

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.