


### BOX#1

A. HEADBOARD 1 PC
B. HEADBOARD LEG 2 PCS







### BOX#2


B. FOOTBOARD LEG 2 PCS 2 PCS C. SIDE RAIL D. FOOTBOARD 1 PC E. SLAT **39 PCS** 2 PCS F. CENTER SLAT SUPPORT G. SIDE RAIL SLAT CLIP 26 PCS H. CENTER SUPPORT SLAT CLIP 26 PCS I. SLAT SUPPORT LEG 4 PCS **HARDWARE SET** 












HARDWARE PACKED IN BOX#1				
1	ALLEN BOLT(1/4"x1")	<b>Olimin</b>	8 PCS	
2	ALLEN BOLT(5/16"x3-1/4")	<b>Diminimu</b>	4 PCS	
3	FLAT WASHER(5/16")		12 PCS	
4	LOCK WASHER(5/16")		12 PCS	
5	ALLEN KEY(1/4")		1 PC	
6	ALLEN KEY(5/16")		1 PC	
HARDWARE PACKED IN BOX#2				
1	ALLEN BOLT(5/16"x1")	Ommon	8 PCS	

I I I I I I I I I I I I I I I I I I I				
1	ALLEN BOLT(5/16"x1")	<b>Olympia</b>	8 PCS	
2	ALLEN BOLT(5/16"x2-1/2")	O)mmm	8 PCS	
- 3	ALLEN BOLT(5/16"x3-1/4")	<b>Onnama</b>	4 PCS	
4	FLAT WASHER(5/16")		28 PCS	
5	LOCK WASHER(5/16")		20 PCS	
6	WRENCH(5/16")		1 PC	
7	ALLEN KEY(5/16")		1 PC	
8	HEX NUT(5/16"x12)		8 PCS	









UPDATED:AUGUST 14TH, 2021






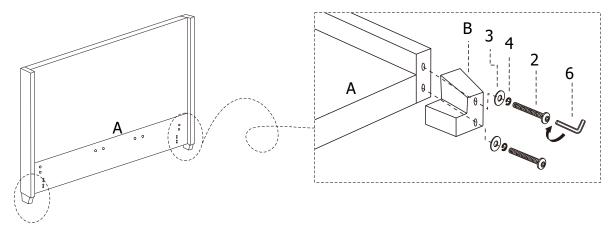

### STEP 2

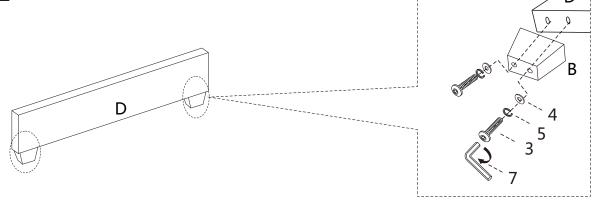

## STEP 3

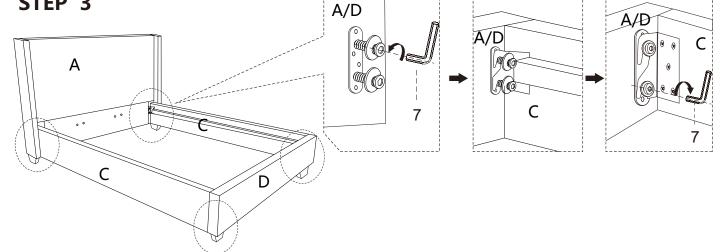


### **STOP**

- IF USING BED WITH AN ADJUSTABLE MATTRESS BASE, SKIP STEPS 4, 5,6,& 7 AND REFERENCE APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION, CONTINUE TO STEP 4.


UPDATED:AUGUST 14TH, 2021




### STEP 4

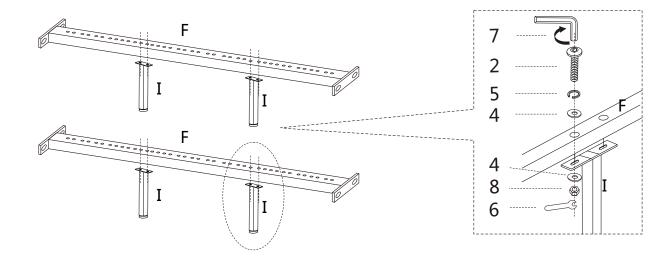

### STEP 5

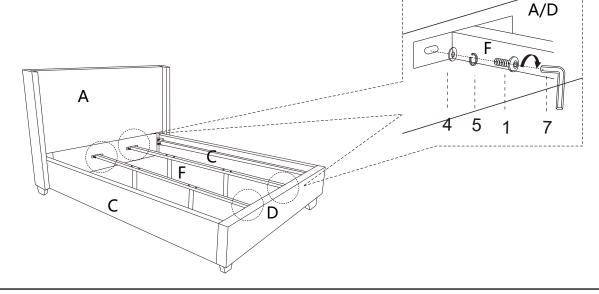



# STEP 6

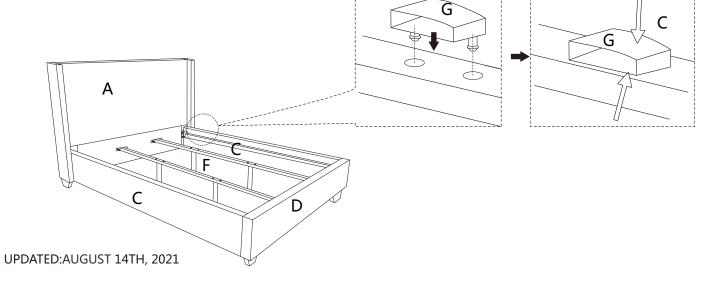




### STEP 7







ASSEMBLY COMPLETE.


### **INSTRUCTIONS FOR ADJUSTING LEVELERS:**

POSITION THE BED IN YOUR ROOM. LOCATE LEVELERS UNDER EACH SUPPORT LEG ( I ).

TURN COUNTER-CLOCKWISE TO EXTEND, CLOCKWISE TO RETRACT.

ADJUST LEVELERS UNTIL EACH LEG SUPPORT IS APPLYING EQUAL UPWARD PRESSURE ON THE CENTER SLAT.

UPDATED:AUGUST 14TH, 2021



#### **MAINTENANCE INSTRUCTIONS:**

- REMOVE BOX SPRING AND MATTRESS BEFORE MOVING YOUR BED.
- LIFT YOUR BED WHEN MOVING IT. DRAGGING CAN DAMAGE CENTER SUPPORT.
- READJUST LEVELERS AFTER MOVING YOUR BED.



APPENDIX A:ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT

AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.

PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

#### **WARNING!**


SIDE RAIL CLEATS ARE HELD IN PLACE USING PHILLIPS HEAD SCREWS. ONCE THEY ARE REMOVED THE USER WILL NOT BE ABLE TO SAFELY RE-INSTALL THE SIDE RAIL CLEATS FOR FUTURE USE WITH A STANDARD BOX SPRING OR FOUNDATION.

#### THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

E. SLAT	39 PCS
F. CENTER SLAT SUPPORT	2 PCS
G. SIDE RAIL SLAT CLIP	26 PCS
H. CENTER SUPPORT SLAT CLIP	26 PCS
I. SLAT SUPPORT LEG	4 PCS

### STEP 1:

USE A PHILLIPS HEAD SCREWDRIVER (NOT PROVIDED) TO UNSCREW THE PHILLIPS SCREWS AND REMOVE THE PRE-ASSEMBLED SIDE RAIL CLEATS.

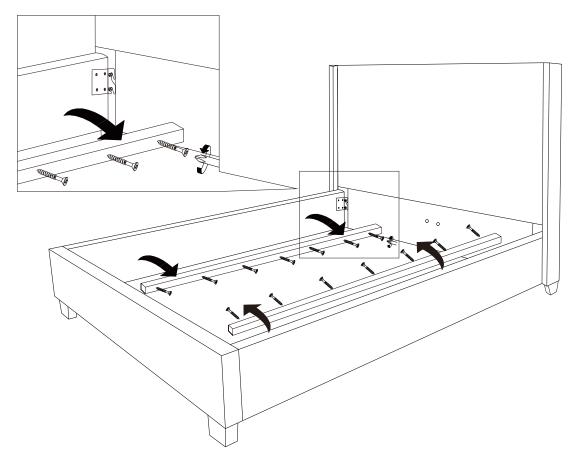

UPDATED:AUGUST 14TH, 2021