

UP1200

The UP1200 UPS system offers battery backup and surge protection for home/office computers and connected electronics.



KEY FEATURES:

- 1200VA / 670W Simulated sine wave
- Standby Topology
- Tower Form Factor
- RJ11/RJ45 Protection
- 8 Outlets / Serial port
- EMI/RFI filters
- PowerPanel® Personal Edition

Runtimes:

3 Minutes at Full-load
10 Minutes at Half-load

DESIGNED FOR:

- Workstations/PCs
- Home Office/Small Office
- Personal Electronics
- POS Terminals

The CyberPower Standby UP1200 uninterruptible power supply (UPS) safeguards a home office PC and other electronics (monitors, printers, scanners, speakers, fax machines, CD/DVD players and iPods) from surges, spikes, sags, brownouts and other power abnormalities. Its composite integrated circuitry offers advanced lightning protection.

The UP1200 unit has a capacity of 1200VA/670Watts, eight (8) NEMA 5-15R receptacles, widely-spaced to accommodate transformer-based plugs. Its tower design allows for placement on the floor, inside a workstation cabinet, or directly on the desktop. This UPS has a maintenance-free, user-replaceable 12V/7.2Ah battery and offers connectivity via one (1) serial port and a serial cable with USB adapter. Protection for phone/network (RJ11/RJ45) is also included. EMI/RFI filters increase the immunity of the load to disturbances and surges. PowerPanel® UPS Management software is included to monitor the vitality of the UPS and will safely shutdown the system in case of a power outage.

FEATURES & BENEFITS:

EMI/RFI Filters: Filters against electromagnetic interference and radio frequency interference ensuring clean power for connected equipment.

Transformer-Spaced Outlets: Widely-spaced outlets accommodate large transformer-based plugs without compromising the utility of other outlets.

LED Indicators: LED status lights indicate Power-On and wiring faults.

Audible Alarms: Distinctive tones identify when the unit is running on battery power, if it is overloaded or when the battery is low.

Resettable Circuit Breaker: Convenient unit reset switch in case of an overload.

Metal Housing: Industrial-grade metal construction allows for installation of the unit in demanding environments.

PowerPanel® Personal Edition: In event of a power outage, PowerPanel PE saves open files and "hibernates" the PC to increase the run-time on the UPS unit. PowerPanel is easily installed on any Windows-based PC and uses minimal system resources. Diagnostic screens display the status of the UPS, including silent operation mode, configurable system notifications, automatic self tests, adjustable high/low voltage warnings, event/data logging, and scheduled shutdowns.

Technical Support: CyberPower assists users with any product, installation, or warranty concerns—free of charge.

3-Year Warranty: Stringent manufacturing processes and innovative product design enables CyberPower to offer one of the strongest warranties in our industry. CyberPower will repair or replace damaged units within three (3) years of purchase date.

ISO & Safety Certifications: All CyberPower manufacturing facilities are state-of-the-art and ISO-9001 Quality Tested. Our products are certified by the FCC, cUL, and UL.

Windows Compatibility: Our PowerPanel® power management software has been fully tested and is compatible with Windows 2000, 2003, XP 32/64, Vista 32/64, 7, and Server 2008.

UP1200 SPECIFICATIONS

GENERAL

| | |
|--------------|---------|
| UPS Topology | Standby |
|--------------|---------|

INPUT

| | |
|---------|-----------------|
| Voltage | 100Vac - 140Vac |
|---------|-----------------|

| | |
|-----------|--------------|
| Frequency | 60Hz +/- 3Hz |
|-----------|--------------|

| | |
|-----------|------------|
| Plug Type | NEMA 5-15P |
|-----------|------------|

| | |
|------------|-------------|
| Plug Style | Right angle |
|------------|-------------|

| | |
|-------------|----|
| Cord Length | 6' |
|-------------|----|

OUTPUT

| | |
|----|------|
| VA | 1200 |
|----|------|

| | |
|-------|-----|
| Watts | 670 |
|-------|-----|

| | |
|--------------------|---------------|
| On Battery Voltage | 120Vac +/- 5% |
|--------------------|---------------|

| | |
|----------------------|-------------|
| On Battery Frequency | 60Hz +/- 1% |
|----------------------|-------------|

| | |
|---------------------|---------------------|
| On Battery Waveform | Simulated Sine Wave |
|---------------------|---------------------|

| | |
|---------------|---|
| Outlets-Total | 8 |
|---------------|---|

| | |
|-------------|------------|
| Outlet Type | NEMA 5-15R |
|-------------|------------|

| | |
|-------------------------------------|---|
| Outlets - Battery & Surge Protected | 4 |
|-------------------------------------|---|

| | |
|--------------------------------|---|
| Outlets - Surge-Only Protected | 4 |
|--------------------------------|---|

| | |
|-------------------------|---|
| Outlets - Widely Spaced | 8 |
|-------------------------|---|

BATTERY

| | |
|----------------------------|----|
| Runtime at Half Load (min) | 10 |
|----------------------------|----|

| | |
|----------------------------|---|
| Runtime at Full Load (min) | 3 |
|----------------------------|---|

| | |
|--------------|------------------|
| Battery Type | Sealed lead acid |
|--------------|------------------|

| | |
|--------------|-----------|
| Battery Size | 12V/7.2AH |
|--------------|-----------|

| | |
|------------------|-----|
| User Replaceable | Yes |
|------------------|-----|

| | |
|-----------------------|---------|
| Typical Recharge Time | 8 Hours |
|-----------------------|---------|

| | |
|---------------------|-----------------------|
| Replacement Battery | BB Battery - BP7.2-12 |
|---------------------|-----------------------|

| | |
|------------------|---|
| Battery Quantity | 2 |
|------------------|---|

SURGE PROTECTION & FILTERING

| | |
|-------------------|--------------|
| Surge Suppression | 1,780 Joules |
|-------------------|--------------|

| | |
|------------------------------|---------------------|
| Phone / Ethernet RJ11 / RJ45 | 1-In, 1-Out (Combo) |
|------------------------------|---------------------|

| | |
|--------------------|-----|
| EMI/RFI Filtration | Yes |
|--------------------|-----|

MANAGEMENT & COMMUNICATIONS

| | |
|-------------|-----|
| Serial Port | Yes |
|-------------|-----|

| | |
|------------------|---------------------------|
| Management Cable | Serial cable, USB adapter |
|------------------|---------------------------|

| | |
|----------------|---------------------------------------|
| LED Indicators | Power on, using battery, wiring fault |
|----------------|---------------------------------------|

| | |
|----------------|-----------------------------------|
| Audible Alarms | On battery, low battery, overload |
|----------------|-----------------------------------|

| | |
|----------|------------------------------|
| Software | PowerPanel® Personal Edition |
|----------|------------------------------|

PHYSICAL

| | |
|--------------------|----------------------|
| Dimensions (WxHxD) | 5.5" x 7.25" x 12.5" |
|--------------------|----------------------|

| | |
|---------------|----|
| Weight (lbs.) | 27 |
|---------------|----|

CERTIFICATIONS

| | |
|----------------|------------------------------|
| Certifications | UL1778, cUL, FCC DOC Class B |
|----------------|------------------------------|


| | |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

WARRANTY

| | |
|------------------|-----------------|
| Product Warranty | 3 Years Limited |
|------------------|-----------------|

| | |
|-------------------------------|----------|
| Connected Equipment Guarantee | Lifetime |
|-------------------------------|----------|

| | |
|------------|-----------|
| CEG Amount | \$100,000 |
|------------|-----------|

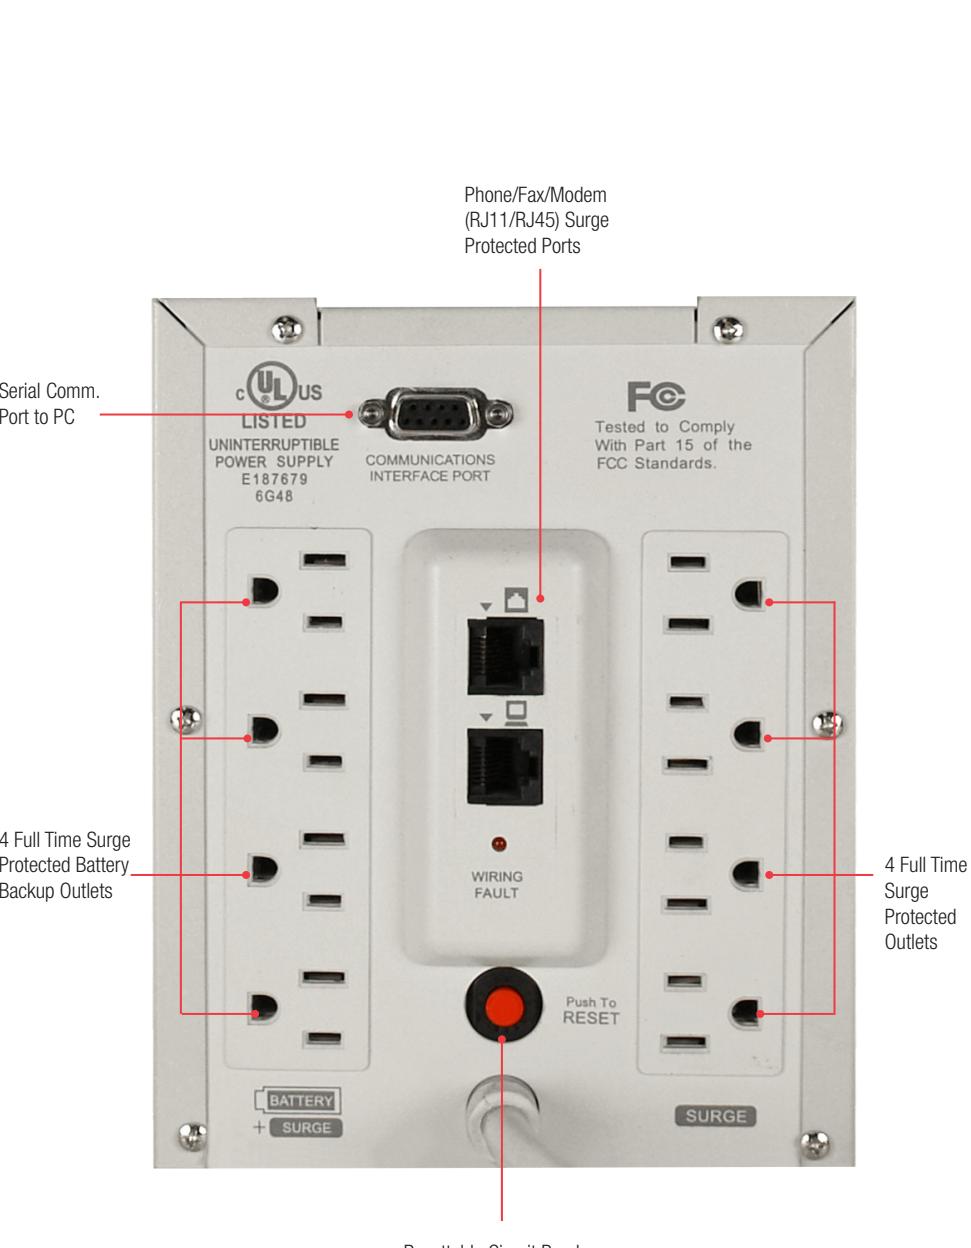

CyberPower Systems, Inc. designs and manufactures state-of-the-art power protection and distribution equipment for corporate, business, home, government and educational markets. CyberPower leads the industry by surpassing customer expectations in the development, design, construction, durability and functionality of uninterruptible power supply (UPS) products for computers, peripherals and connected devices. CyberPower Systems operates in the Asian Pacific, North American, and European markets. For additional information, including sales office locations and authorized reseller partners, visit CPSwww.com.

© 2011 CyberPower Systems (USA), Inc. All rights reserved. All other trademarks are the property of their respective owners. CyberPower reserves the right to modify product information or specifications without previous notice. The information presented is accurate at the time of publication. 10-2011