
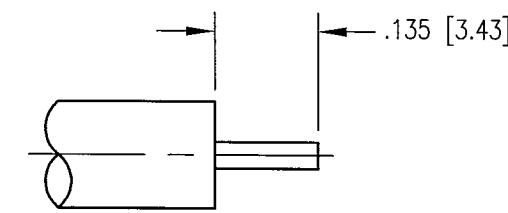
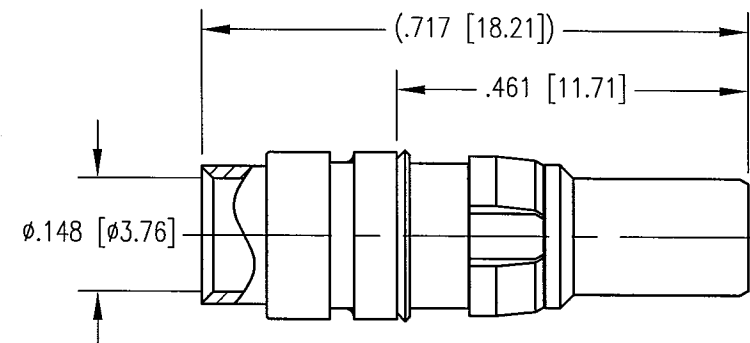


DWG. NO. 260-510-1410G		
REV	DESCRIPTION	BY DATE APPD
C	RELEASE PER NPR 2733	MJF 1/14/02

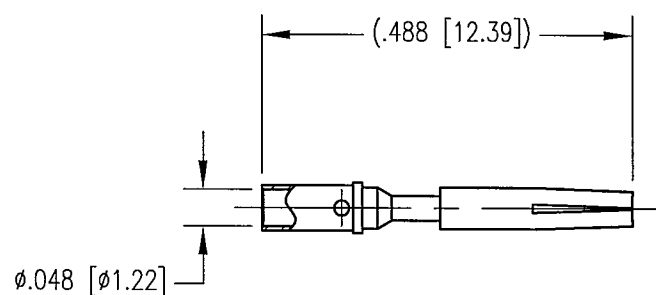

CABLE TRIMMING DIMENSIONS

NOTES:

- MATERIALS:
 BODY'S: BRASS PER ASTM B16
 CONTACT: COPPER ALLOY
 INSULATOR: TEFLON PER ASTM D1710
 SPRING WASHER: PHOSPHOR BRONZE PER ASTM B103
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
- FINISH:
 BODY'S AND CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 SPRING WASHER: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER
 COPPER FLASH
- FOR USE WITH .141 SEMI-RIGID CABLE OR EQUIVALENT.
- FOR CABLING PROCEDURES USE CAP 5-15 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMALS .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± 2°		Litton Winchester/Retconn 400 Park Road Watertown, Connecticut 06795	
CUSTOMER DRAWING		TITLE RDM PLUG ASSEMBLY WITH CAPTIVE CENTER CONTACT	
DRAWN MJF	DATE 1/14/02	CHECKED [Signature]	DATE 1-14-02
APPROVED [Signature]	DATE 1/14/02	APPROVED [Signature]	DATE 1/14/02
A 260-510-1410G		SH. 1 OF 1	REV. C