



REV.	DESCRIPTION	DATE	BY	APPD
A	NPR 1988	9/8/00	JWH	

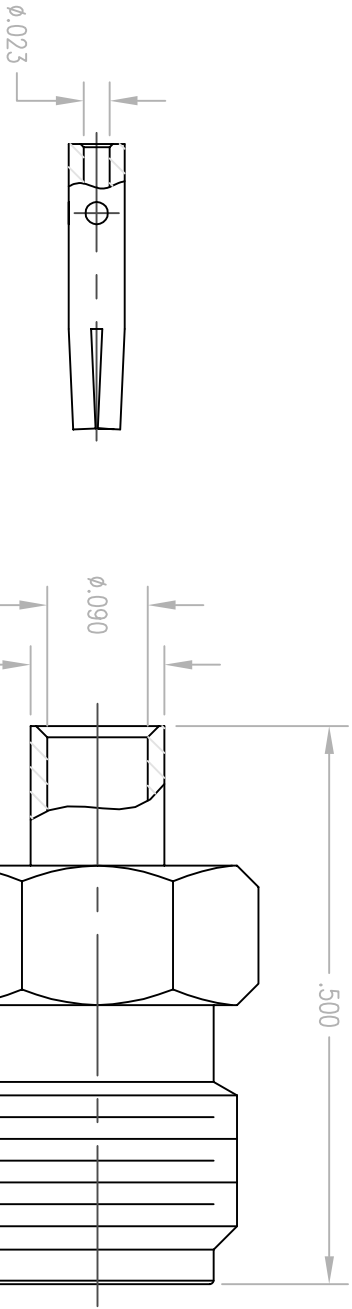

.250 HEX

1/4-36 UNS-2A THD

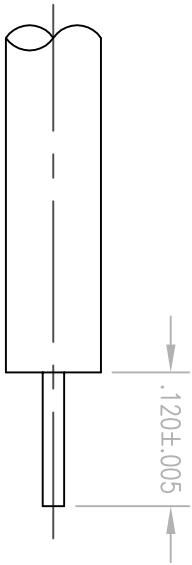

CABLE TRIMMING DIMENSIONS

NOTES:

1.MATERIALS:

BODY: BRASS PER ASTM B16
CONTACT: BERYLLIUM COPPER PER ASTM B196
INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
3. DESIGNED FOR USE WITH ϕ .085 SEMI-RIGID CABLE.
4. FOR CABLING PROCEDURES USE CAP 5-02 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (IN.) TOLERANCES: .XX ± .01/0.254 DECIMALS .XX ± .005/0.127 ANGLES ± Z° SCALE: 6:1				LITTON Winchester/Reticon 400 Park Road Westford, Connecticut 06096			
CUSTOMER DRAWING		TITLE		SMA STRAIGHT RECEPTACLE			
DRAWN JWH	DATE 9/9/00	CHECKED	DATE				
APPROVED	DATE	APPROVED	DATE	A	351-500-0850H	SFT.	OF
				1	1		REV.
							A