

COSCO®

solid value | smart design


COSCO®

solid value | smart design

www.coscojuvenile.com

Light 'n Comfy Infant Car Seat

Rear-facing:
4-22 pounds
29" or less

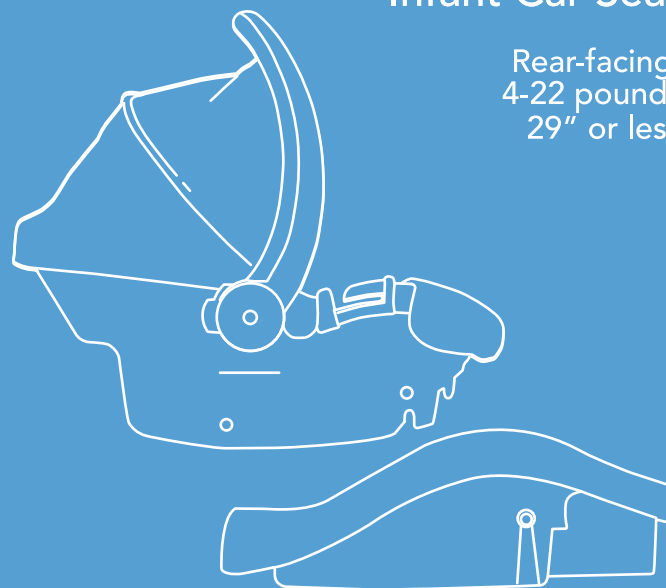

KEEP INSTRUCTIONS FOR FUTURE USE.

Read all instructions before using this child restraint.

⚠ WARNING:

Failure to follow the warnings on the labels and in the instruction manual can result in serious injury or death to your child.

4358-6447A

© 2013 Cosco Management Inc. All Rights Reserved.

A. Before You Begin.....Pages 3-8

- A-1 Thank You...
- A-2 Registration and Safety Notices
- A-3 Understanding Your Child Restraint

B. Safety Information..... Pages 9-10

- B-1 Vehicle Seating Position
- B-2 Installation in Vehicle
- B-3 Child Restraint Use

C. Basic UsePages 11-30

- C-1 Remove and Install the Child Restraint to Base
- C-2 Reclining the Base (on select models)
- C-3 Carrier Use
- C-4 Preparing Child Restraint to Fit Your Child
- C-5 Securing Child in Child Restraint
- C-6 Remove Child from Child Restraint
- C-7 Removing Harness System
- C-8 Removing Pad for Cleaning
- C-9 Canopy Use and Installation
- C-10 Infant Insert
- C-11 Installing Harness System

D. General Vehicle InstallationPages 31-39

- D-1 Understanding Your Vehicle
- D-2 Vehicle Seating Position
- D-3 Choosing LATCH or Vehicle Belts
- D-4 Knowing Your Vehicle Belts
- D-5 Using a Locking Clip
- D-6 Installing on Aircraft
- D-7 Storing LATCH System

E. Installing Rear-Facing..... Pages 40-49

- E-1 Rear-Facing Installation with Base

- E-2 Preparing to Install Base with LATCH

- E-3 Installing Base with LATCH



- E-4 Installing Base with Vehicle Belts



- E-5 Rear-Facing Installation without Base

- E-6 Installing Child Restraint with Vehicle Belts



A-1 Thank You...

Thank you for choosing this car seat, referred to throughout this manual as a child restraint. The DJG family is committed to creating a child restraint with the most comfort and convenience available today.

Remember, parents are a child's first teachers and examples. If you always buckle your seat belt, your child will think it is the natural thing to do. Make it a firm rule that the vehicle does not go until everyone is buckled up. Make no exceptions.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read and follow these instructions. After reading, if you still have questions or have any problems with this child restraint, please contact our Consumer Relations Department at:

Dorel Juvenile Group, Inc.

Website: www.djgusa.com
Email: consumer@djgusa.com
Fax: 1-800-207-8182
Mailing Address: Dorel Juvenile Group, Inc.
P.O. Box 2609
Columbus, IN 47202-2609
Telephone: 1-800-544-1108
8 A.M. to 6 P.M. EST M-TH
8 A.M. to 4:30 P.M. EST FRI

On the back of the plastic shell there is an expiration date for use of this child restraint. Do not use this child restraint after the expiration date.

Para recibir las instrucciones en español, llame al 1-800-544-1108 o solicítase por escrito al dirección por arriba.

A-2 Registration and Safety Notices

Please complete the postage-paid registration card that came with your child restraint, and send it to us. Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, email address if available, and the restraint's model number and manufacturing date to:


Dorel Juvenile Group, Inc.
PO Box 2609, Columbus, IN 47202-2609
Attn: Consumer Relations

or call 1-800-544-1108 or register online at www.djgusa.com/registration/carseat/us.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>


The image shows a registration card with the following fields: Name, Street Address, City, State, Zip, and Email Address (optional). Below these fields is a section for Model Number and Manufacture Date. A red arrow points from the 'Model Number' label to the 'Model Number' field, and another red arrow points from the 'Manufacture Date' label to the 'Manufacture Date' field. The card also includes a barcode and the text 'BC027-ASW SE 1 BOOST AIR PROTECT 06/05/2010'.

If you don't have the card or if your address changes, you will find the model number and manufactured date on the label located on side of plastic shell.



A-3 Understanding Your Child Restraint


Front View

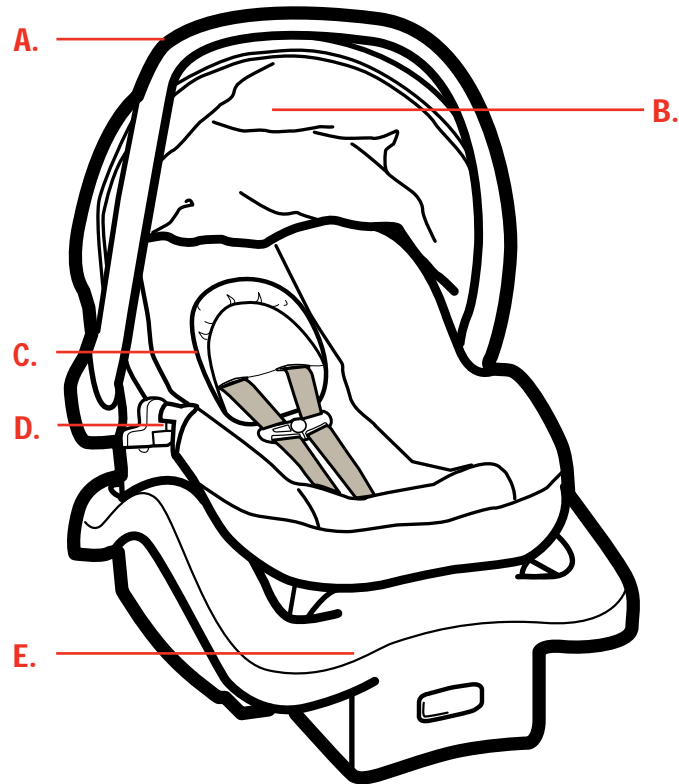


- A.** Carry handle
- B.** Canopy
- C.** Infant Insert
(on select models)
- D.** Rear-Facing Belt Path
(when used without the base)
- E.** Removable Base

5

Back View

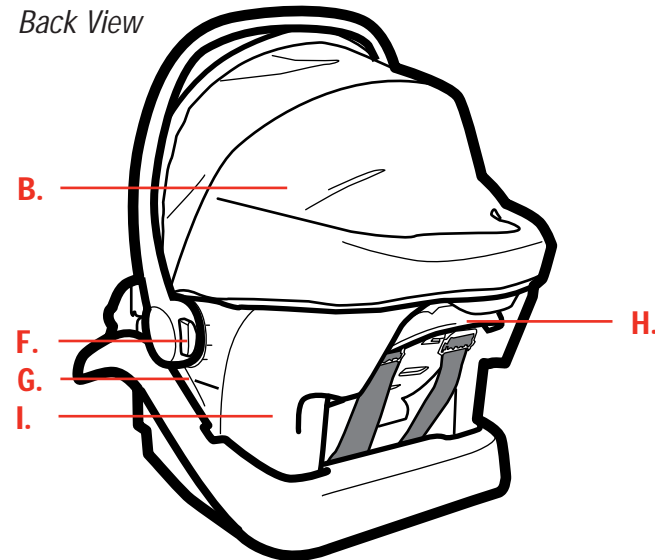

- F.** Carrying handle Adjustment Lever
- G.** Level to Ground Line
- H.** Base Release handle
- I.** Child Restraint (shell)

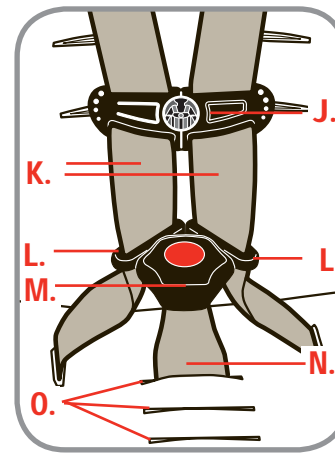


Harness System Detail

- J.** Chest Clip
- K.** Harness Straps
- L.** Buckle Tongues
- M.** Buckle
- N.** Buckle Strap
- O.** Buckle Strap Slots

6

A. Before You Begin


Bottom of Child restraint

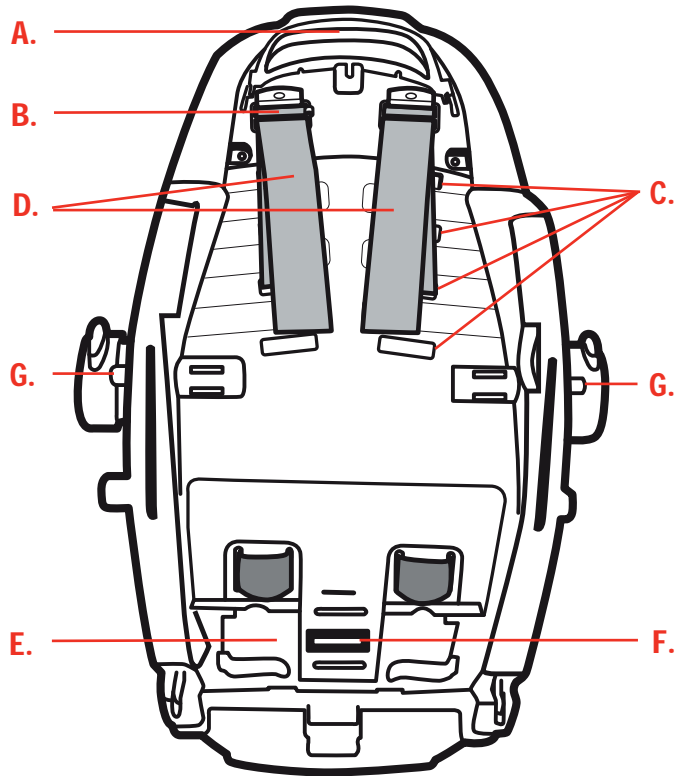



- A.** Base Release Lever
- B.** Harness Adjustment Brackets
- C.** Harness Slots
- D.** Harness Straps
- E.** Instruction Book Storage
- F.** Buckle's Metal Retainer
- G.** Stroller Attachment Pins

7

Top of Base

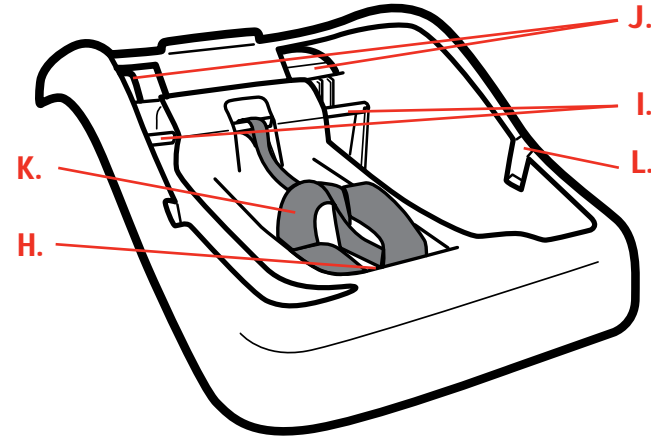

A. Before You Begin



- H.** LATCH Storage
- I.** Base/Child Restraint Lock Bar
- J.** Base Belt Path Openings
- K.** LATCH Belt
- L.** Rear Base Alignment Slots
- M.** Recline Foot (on select models)
- N.** Foot Release Button (on select models)

8

⚠ WARNING:

Failure to follow these warnings can result in the serious injury or death of your child. To help you recognize instructions which are most critical to your child's safety, we use this symbol: ⚠

B-1 Vehicle Seating Position

⚠ Never place a child rear-facing in a seating position with an active frontal airbag.

⚠ Check the vehicle owner's manual for more information about air bag/child restraint use.

⚠ For vehicles without a back seat, refer to your vehicle owner's manual.

B-2 Installation in Vehicle

⚠ Check the vehicle belt or LATCH belt before each use. Use only if the belt is tightened properly and securely.

⚠ This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child restraint could injure occupants.

⚠ Do not use a child restraint that has been in a crash. You must get a new child restraint.

B-3 Child Restraint Use

⚠ Use only in a rear-facing position when using it in the vehicle.

⚠ Never take your child out of the child restraint while the vehicle is moving. Never leave child unattended.

⚠ Placing your child in a hot child restraint may result in burns.

⚠ Do not use a child restraint with damaged or missing parts.

⚠ Do not use cut, frayed or damaged harnesses.

⚠ Do not lubricate buckles and fasteners.

⚠ Do not substitute parts or try to modify the child restraint in any way.


⚠ Do not use any child restraint accessory except those approved by Dorel Juvenile Group.

⚠ Never allow any child to play with this child restraint; it is not a toy.

⚠ Do not remove or cover up any of the warning labels or other labels on the child restraint.


⚠ Read all instructions for additional warnings.

C-1 Remove/Install the Child Restraint to Base




To Remove Child Restraint from Base

From the back of the child restraint, slide the base release handle up the back of the child restraint and lift the child restraint out of the base.



To Attach Child Restraint to Base

Align the notches in the front of the carrier with the base lock bar. Push down firmly on the carrying handle and the front of the child restraint to lock child restraint to base. You will hear a "click" when it is locked.



Pull up on both left and right corners at the foot end to make sure the child restraint is locked to the base.


NOTE: The carrying handle can be in any locked position when installed in the vehicle.

⚠ WARNING:

Failure to securely attach child restraint to base can result in serious injury or death.


C-2 Reclining the Base (on select models)

Depending on your model, the base may have a recline foot. Follow the directions below if your model has the recline foot.




1. Push In on Foot Release Button

Push in on the foot release button and pull the foot all the way down.




2. Lock the Foot

Lock the foot on the release button as shown.




3. To Store Foot

Pull the foot down and press in on the release button. Push the foot up into the base to the locked position.



C-3 Carrier Use




To Adjust Carrying Handle

Squeeze both adjustment levers on each side of the carrying handle. Rotate up or down to desired location. Release levers.

Make sure both carrying handle adjuster levers are in the locked position.

When carrying the child restraint, **the arrow on the handle MUST point UP.**

NOTE: The carrying handle can be in any locked position when installed in the vehicle.



⚠ WARNING:



DO NOT use in the seating area or across the top of shopping carts.

⚠ WARNING:

Read ALL instructions before using child restraint as a carrier.

NEVER use carrier unless child is properly secured. Use only as a carrier by children weighing 22 pounds (10 kg) or less and 29 inches (74 cm) or less.

NEVER leave child unattended. Always keep child within arm's reach.

Suffocation Hazard: Infant carrier can roll over on soft surfaces and suffocate child. **NEVER** place carrier on beds, sofas or other soft surfaces.


Strangulation Hazard: Children have **STRANGL**ED in loose or partially buckled harness straps. Fully restrain the child even when carrier is used outside the vehicle.

Fall Hazard: Child's movement can slide carrier. **NEVER** place carrier near edges of counter tops, tables or other elevated surfaces.

Do not use the carrier if it is damaged or broken, or if any parts are missing.


C-4 Preparing Child Restraint to Fit Your Child

Make these adjustments with your child in the child restraint before you install in the vehicle.




1. To Remove Child Restraint from Base

From the back of the child restraint, slide the base release handle up the back of the child restraint and lift the child restraint out of the base.




2. Loosen Harness

From the back of the child restraint, loosen the free end of the harness from the harness adjustment bracket to make a large loop.




- a. Pull down on the harness strap close to the harness slot to remove the loop at the harness bracket.

15




- b. From the front of the child restraint, pull the harness to remove the slack in the back. Repeat for other harness adjustment bracket.



3. Release Chest Clip

Press on chest clip release button and pull apart.



4. Unbuckle Harness

Press red button. Pull buckle tongues out. Place harness straps over sides of child restraint.




5. Place Child in Child Restraint

Place the child's bottom and back flat against the child restraint. This will increase comfort and allow the harness straps to be properly tightened.

16


continued on next page.

C. Basic Use



6. Check Buckle Position

Determine which of the available buckle positions will be most comfortable and provide a snug fit for your child.




To Change Buckle Position

- a. Remove child. From under the seat, insert buckle's metal retainer up through the child restraint and pad.




- b. Choose new location and push the metal retainer through pad and child restraint. Make sure the buckle is facing out.



- c. Pull on the buckle to check to make sure buckle's metal retainer is completely inserted through the pad and child restraint.



⚠ WARNING:

Failure to reinstall the harness system correctly can result in serious injury or death.




Buckle Placement for Small Infants

- d. Choose the slot closest to the back of the restraint. Push metal retainer through the pad and child restraint. Make sure buckle is facing out.
- e. From the bottom, pull the metal retainer through the child restraint and insert it into the middle slot.




- f. From the front, lift pad up and place the buckle's metal retainer flush on bottom of the child restraint. Replace the pad.



- g. Pull on the buckle to check to make sure buckle's metal retainer is secured.

⚠ WARNING:

Failure to reinstall the harness system correctly can result in serious injury or death.



7. Check Harness Height

With child in the child restraint, check the location of the harness slot.


Follow the guidelines below to determine the correct harness height.



Rear-Facing Position


Harness slot must be **even with or just below** the shoulders.

If the bottom harness slots are above the child's shoulders, **do not** use this child restraint.




8. To Change Harness Location



From the back of child restraint, remove the free end of the harness from the harness bracket.



- a. From the front of child restraint, pull harness straps out. Repeat for other harness strap.



- b. Rethread harness into new harness slot location. **Make sure harness straps do not twist.**



- c. From the back of child restraint, rethread one harness end onto one adjustment bracket by threading loose end over lower bar, behind the locking teeth and up between upper teeth and top of bracket. Thread harness end down between locking teeth and out the bottom of bracket as shown. **Make sure harness does not twist.** Repeat for other adjustment bracket.

⚠ WARNING:



Top of your child's head MUST be at least one inch below the top of the child restraint.

Make sure the harness height is correct for your child's size.

Make sure you have reinstalled the harness system correctly.

Failure to follow these steps can result in serious injury or death.

C. Basic Use

C-5 Securing Child in Child Restraint

⚠ WARNING:



DO NOT put snowsuits or bulky garments on your infant when placing them in the child restraint.


Bulky clothing can prevent the harness straps from being tightened properly.

To keep infant warm, buckle your infant in the child restraint and place a blanket around the infant or place the infant's coat on backwards after buckling in.

Failure to follow these steps can result in serious injury or death.




1. Position Harness Straps Over the Child's Shoulders.



2. Put Buckle Tongues Together


Fit top buckle tongue over bottom buckle tongue.

21




3. Buckle

While holding the buckle tongues together, push buckle tongues into the buckle until you hear a "click". Pull on the harness straps just above the buckle to make sure the buckle tongues are locked into place.



4. Close Chest Clip

Insert right half of chest clip into left half and snap together.



5. Tighten Harness


Pull harness strap away from child restraint at the harness strap to tighten harness snugly. Pull on free end to remove the slack.

NOTE: A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

22


continued on next page.

C. Basic Use



6. *Position Chest Clip*

The chest clip must be placed at mid-chest (even with armpits) and away from the child's neck.




7. *Check Harness Tightness*

Try to pinch the harness at the shoulders. If you can pinch the harness strap, tighten more. If your fingers slip off, the harness is tight enough.

⚠ WARNING:


Failure to fasten and tighten the harness system correctly and snugly can result in serious injury or death.

C-6 Removing Child From Child Restraint




1. *Loosen Harness*

From the back of the child restraint, loosen the free end of the harness from the harness adjustment bracket to make a large loop.




- a. Pull down on the harness strap close to the harness slot to remove the loop at the harness bracket.



2. *Release Chest Clip*


Press on release button and pull apart.



3. *Unbuckle*


Press red button on buckle to release the buckle tongues. Move harness away from child and remove child.

C-7 Removing Harness System




1. To Change Harness Location

From the back of child restraint, remove the free end of the harness from the harness bracket.



- a. From the front of child restraint, pull harness straps out. Repeat for other harness strap.

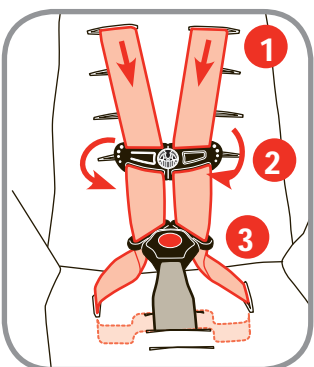

2. Remove Harness Straps

Pull harness through the slots from the front (1).

Unthread harness from the chest clip (2).


Unthread harness from the buckle tongues (3).

The harness straps do not need to be completely removed from the shell to remove the pad for cleaning.

25


C-8 Removing Pad for Cleaning

You must follow the instructions on how to remove the harness system before you can remove the pad.





1. Release the Pad Tabs

To release the tab, pull down on the pad and pull the tab out of the child restraint.



2. Remove the Elastic Strap

Pull the elastic strap off of the belt path guide as shown on both sides.




3. Remove Pad from Top of Shell

Unhook the pad off the tabs at the top of the child restraint.


26

continued on next page.

C. Basic Use



4. Remove Pad from the Bottom of Child Restraint



5. Pull Buckle Through Pad
Remove pad.

Cleaning Pad

Machine wash separately with cold water on a gentle cycle. Do not use bleach. Tumble dry separately for 10-12 minutes on low heat. Remove immediately.

Spot clean the harness straps.

⚠ WARNING:

Do not use child restraint without the pad.


Replace child restraint pad by reversing order.

Starting from top of the child restraint, slip pad on plastic shell; insert buckle and pull harness tightening strap through pad. Slip pad over front of the plastic shell.


Attach all of the plastic tabs on the sides of plastic shell. Attach both elastic straps to the belt path guide.

Rethread harness (see section C-11).


C-9 Canopy Use and Installation




1. To Remove Canopy
Unfasten the fastening strip on the back of the child restraint.




2. Slide Canopy Fabric to One Side
Slide the canopy to one side of the child restraint to expose the canopy hoop connection.



3. Undo Canopy Hoop
Pull top canopy up and bottom down where they connect to unhook. Then pull the hoop apart.



Reverse to put back together.




4. To Adjust Canopy
Grasp the front or sides of the canopy and move front to back to desired location.

C-10 Infant Insert (on select models)

NOTE: Depending on your model, choose the correct method to remove/install your infant insert if your model has an infant insert.


When using the infant insert, make sure insert does not cover your infant's face in anyway. Remove the insert for older babies.



Basic Insert:

To Remove Infant Insert

Unthread the harness from the harness adjustment brackets. Pull harness through the top slots and remove the insert. Rethread the harness straps into the harness adjustment brackets. Reverse to install the infant insert.



Deluxe Insert:


To Remove Infant Insert

Undo the fastening strips and pull the infant insert out from behind the harness straps.

To Install Infant Insert


Undo the fastening strips and fit the head/hip roll behind the harness straps. Refasten the fastening strips.

C-11 Installing Harness System




1. From the front, make harness ends even with each other.

Thread harness straps through each buckle tongue from the back to the front (1), thread through chest clip (2), and push harness ends through slots in the seat back (3). **Do not twist the harness.**



NOTE: If you have completely removed the harness, start on the left side, insert harness in the harness slot, going through both pad and shell. Make sure you weave the harness in and out of the shell, between shell and pad, as shown.

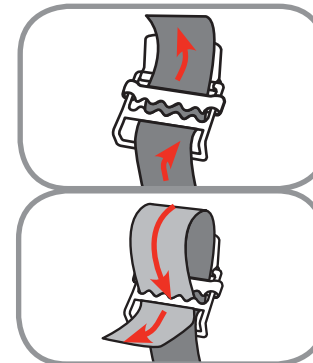

From the back of child restraint, rethread one harness end onto one adjustment bracket by threading loose end over lower bar, behind the locking teeth and up between upper teeth and top of bracket. Thread harness end down between locking teeth and out the bottom of bracket as shown. **Make sure harness does not twist.** Repeat for other adjustment bracket.


⚠ WARNING:

Failure to reinstall the harness system correctly can result in serious injury or death.

C. Basic Use

D-1 Understanding Your Vehicle

Your vehicle's features may be considerably different than those pictured here. Consult your vehicle owner's manual to help identify your vehicle's specific features and locations.

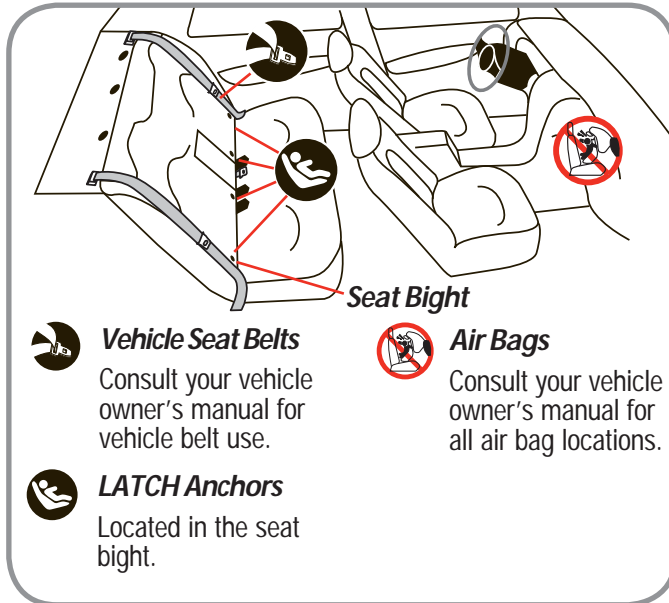

Safety Tip:

To help protect your vehicle seat's upholstery from damage, use a single layered towel underneath and behind child restraint.

To avoid your child being seriously burned, take the following precautions:

1. Park in the shade or where sun does not directly hit the child restraint.
2. Cover the child restraint with a sheet or blanket when not in use.
3. Check for hot child restraint and buckles before placing child in child restraint.

D-2 Vehicle Seating Position

Some seating positions in your vehicle may not be safe for this child restraint. Some vehicles do not have a seating position that can be used safely with this child restraint. If you are not sure where to place the child restraint in your vehicle, consult your vehicle owner's manual or contact Dorel Juvenile Group Consumer Relations Dept.

⚠ WARNING:



Never place a child rear-facing in a seating position with an active frontal airbag. This can result in serious injury or death.

⚠ WARNING:



Use the child restraint only on vehicle seats that face forward. Do not use on seats that face the sides or rear of the vehicle.


Safety Tip:



Children are safer when properly restrained in rear seating positions than in the front seating positions.

According to National Highway Traffic Safety Administration information, children in rear seating positions are statistically safer, whether you have air bags, advanced air bags, or no air bags at all.

D-3 Choosing LATCH or Vehicle Belts




The LATCH System

LATCH (Lower Anchors and Tethers for Children) is a universal system for installing child restraints without using vehicle seat belts.

The LATCH system can ONLY be used in vehicles that have

the LATCH anchor bars installed and designated LATCH seating positions. Most vehicles manufactured after September 2002 are equipped with LATCH.

Check your vehicle owner's manual to see which seating positions may be equipped with the LATCH system.



Vehicle Belts

If LATCH is not an option, you must use the vehicle seat belt system to install the child restraint. There are some vehicle belts that will not work with a child

restraint or will require special attention.

See next page and check your vehicle's owner's manual for specific instructions.

WARNING:

Do not use both the LATCH belt and vehicle belt at the same time.

D-4 Knowing Your Vehicle Belts

Review your vehicle's owner manual for vehicle seat belt use with child restraints. This is your best source for information concerning your vehicle.

Not all vehicle belts will work with this child restraint. This child restraint must be tightly locked in place at all times, during travel. You must determine if your vehicle's belts are compatible with this child restraint.

Vehicle Belts


• Automatic/Passive vehicle seat belts

You MUST have a vehicle lap belt to install any child restraint. An automatic (passive) shoulder vehicle belt may or may not have a separate vehicle lap belt. Consult your vehicle owner's manual.



• Vehicle belts in center of the door or side panel

You must move the child restraint to another seating location. Consult your vehicle owner's manual.




• Vehicle belts that are in front of the seat bight

You may need to move the child restraint to another seating location. Consult your vehicle owner's manual.

• Do Not Use with inflatable seat belts

You may need to move the child restraint to another seating location or use LATCH belts only.

• ELR (Emergency Locking Retractor) vehicle belts



These lap and shoulder vehicle belts only lock in a sudden stop or crash, and do not properly secure a child restraint alone. Consult your vehicle owner's manual.

To learn if you have this type of vehicle belt, gently pull the vehicle belt all the way out of the retractor (spool), let it return

several inches, then pull on it again. If it moves freely, it is an ELR vehicle belt. If it is locked and will not allow any more vehicle belt to come out, it is a switchable retractor.

⚠ WARNING:

ELR lap-only vehicle belts MUST NOT be used with this child restraint.


• **Switchable retractor**

These vehicle belts switch from ELR to ALR (Automatic Locking Retractor). You must have the vehicle belts in the locking mode to use them. Follow the instructions in the installation sections.

• **ALR (Automatic Locking Retractor)**

These vehicle belts lock after pulling the webbing out and letting the vehicle belt go back into the retractor an inch or two. Follow the instructions in the installation sections.

Vehicle Latch Plates



• **Check the Latch Plates on Your Lap and Shoulder Belt**

Grasp the tongue portion of the latch plate (the part that goes inside the buckle) and pull straight out, in line with the vehicle lap belt. If the latch plate does not slide up and down the vehicle belt, you have a locking latch plate. You should not need to

use a locking clip. Consult your vehicle owner's manual.

If the latch plate slides up and down on the vehicle belt, and you have an ELR retractor, you **MUST** use a locking clip to install the child restraint. You may not need to use the locking clip with a switchable or ALR retractor. Consult your vehicle owner's manual.

D-5 Using a Locking Clip


You will rarely need to use a locking clip except for in some older vehicles. Built in child restraint locking systems have been required in vehicles since 1996, and many vehicles had these features even earlier. Check your vehicle owner's manual to learn how to use the systems in your vehicle. If you need a locking clip, please go back to the store where you purchased this child restraint and purchase one or call us at 1-800-544-1108 to order one. Locking clips from any child restraint manufacturer are okay to use.

Remove the locking clip when the vehicle seat belt is not being used with the child restraint. **A locking clip will not fix all types of seat belt problems.** Review section D-4 and your vehicle's owner manual for vehicle seat belt use with child restraints.

Before you put your child restraint in the vehicle, buckle the lap/shoulder belt. Pull on the lap belt portion. If it loosens or slips, you must either use a locking clip to hold the seat belt tight or move the child restraint to another seating location.

⚠ WARNING:

Do not use both the LATCH belt and vehicle belt at the same time.



1. Place Base in Vehicle Rear-Facing

Thread vehicle lap and shoulder belt through the belt path as shown. Buckle.

continued on next page.



2. Tighten Vehicle Belt

Push down firmly on the base and pull up on the shoulder belt to tighten




3. Locate Locking Clip Location

Grasp both vehicle belts together just behind the latch plate and unbuckle.


NOTE: If the latch plate ends up just at the belt path opening so you cannot grasp the vehicle belt at the latch

plate, grasp the vehicle belts on the opposite side of the child restraint, as close to the latch plate as possible. Install the locking clip on the latch plate end, as close as possible.




4. Attach Locking Clip

Thread both portions of the vehicle belt onto the locking clip, as close to the latch plate as possible.



5. Position Locking Clip

Position locking clip about 1 in. (2.5 cm) from vehicle belt's latch plate. Rebuckle vehicle belt.




6. Check Vehicle Belt Tightness

Grasp the base at the vehicle belt path with one hand. Push and pull the base from side to side, forward and back. The base should not move more than 1 inch.

NOTE: If base moves more than 1 inch, redo all of the steps or try another seating location.

Remove the locking clip when the vehicle seat belt is not being used with a child restraint.



7. Same steps apply for use on the child restraint. See section E-6 for vehicle belt step by step installation.

NOTE: The carrying handle can be in any locked position when installed in the vehicle.

D-6 Installing on Aircraft



This restraint is certified for aircraft use.


Use only on forward-facing aircraft seats. Follow instructions for vehicle installation.

Contact the airline for their specific policies.

D-7 Storing LATCH System

WARNING:

Failure to securely store the LATCH system can result in serious injury or death.




Hook the LATCH hooks to the storage bars in the base as shown.


39

E-1 Rear-Facing Installation with Base


4-22 lbs. (1.8-10 kg) and whose height is 29 inches (74 cm) or less.



 LATCH Belt



 Lap/Shoulder Belt



 Lap Belt

NOTE: If your child does not meet the criteria for the Rear-Facing position, do not use this child restraint.

WARNING:



Never place a child rear-facing in a seating position with an active frontal airbag. This can result in serious injury or death.

This child restraint must always face the rear of the vehicle when installed.

Failure to follow these warnings can result in serious injury or death.

40



E-2 Preparing to Install Base with LATCH




1. Remove LATCH from Storage

Thread one LATCH hook into each belt path opening as shown.



E-3 Installing Base with LATCH

See your vehicle owner's manual for information on designated LATCH positions, anchor locations and anchor weights.



1. Place Base in Vehicle Rear-Facing


Center the base between the vehicle anchors in the chosen seating position.

⚠ WARNING:

Do not use the LATCH system along with the vehicle lap or lap/shoulder belt.

Check LATCH belt before each use. Use only if the belt can be tightened properly and securely.

Failure to follow these warnings can result in serious injury or death.




3. Hook LATCH to Vehicle LATCH Anchor

Fasten one LATCH belt hook to the anchor in the vehicle seat located in the vehicle seat bight. Repeat for other side of child restraint.



4. Tighten LATCH Belt


Push down firmly on the base and pull up on the free end of belt to tighten.



5. Check LATCH Belt Tightness


Grasp the base at the belt path with one hand. Push and pull the base from side to side, forward and back. The base should not move more than 1 inch.

NOTE: If base moves more than 1 inch, try reinstalling the base or try another seating location.



6. To Attach Child Restraint to Base

Align the notches in the front of the carrier with the base lock bar. Push down firmly on the carrying handle and the front of the child restraint to lock child restraint to base. You will hear a "click" when it is locked.




Pull up on both left and right corners at the foot end to make sure the child restraint is locked to the base.

The carrying handle can be in any locked position when installed in the vehicle.


⚠ WARNING:

Failure to securely attach child restraint to base can result in serious injury or death.




7. Check for Proper Recline

Make sure level line on side of child restraint is level with the ground. Adjust base if needed. (See section C-2).



You may need to place a large rolled towel(s) or foam pool noodle(s) under the front of the base to achieve correct recline angle. Check often to be sure padding is still in place and

the belt is tight. **DO NOT** add a towel or pool noodle while the recline foot is being used.



8. To Remove LATCH Belt From Vehicle Anchor

Remove child restraint from base. Press down firmly on the base on the side with the LATCH adjuster. Press

release button to release tension. Unhook LATCH from bar by squeezing spring lever and twist hook.

43




E-4 Installing Base with Vehicle Belts

⚠ WARNING:

Do not use the LATCH system along with the vehicle lap or lap/shoulder belt. Store LATCH belts when using the vehicle belts.

Check the vehicle belt before each use. Use only if the belt is tightened properly and securely.

Failure to follow these warnings can result in serious injury or death.




1. Store LATCH Belts

You **MUST** store the LATCH system when using the vehicle seat belts. See section D-7.



2. Place Base in Vehicle Rear-Facing

Center the base in the chosen seating position.




3. Thread Vehicle Belt

Thread the vehicle lap or lap/shoulder belt combination through belt path as shown.

With an ALR belt, pull the belt all the way out before threading the base.

continued on next page.


44



5. Tighten Vehicle Belt

Push down firmly on the base and pull up on the shoulder belt to tighten.



With a switchable retractor, pull the vehicle shoulder belt all the way out to switch the retractor into the ALR mode before tightening. Feed the slack back into the retractor while tightening.



6. Check Vehicle Belt Tightness

Grasp the base at the belt path with one hand. Push and pull the base from side to side, forward and back. The base should not move more than 1 inch.

NOTE: If base moves more than 1 inch, try reinstalling the base or try another seating location.



7. To Attach Child Restraint to Base



Align the notches in the front of the carrier with the base lock bar. Push down firmly on the carrying handle and the front of the child restraint to lock child restraint to base. You will hear a "click" when it is locked.

Pull up on both left and right corners at the foot end to make sure the child restraint is locked to the base.

The carrying handle can be in any locked position when installed in the vehicle.

⚠ WARNING:

Failure to securely attach child restraint to base can result in serious injury or death.



8. Check for Proper Recline

Make sure level line on side of child restraint is level with the ground. Adjust base if needed. (See section C-2).

You may need to place a large rolled towel(s) or foam pool noodle(s) under the front of the base to achieve correct recline angle. Check often to be sure padding is still in place and the belt is tight. **DO NOT add a towel or pool noodle**


while the recline foot is being used.

continued on next page.


E-5 Rear-Facing Installation without Base

4-22 lbs. (1.8-10 kg) and whose height is 29 inches (74 cm) or less.

NOTE: If your child does not meet the criteria for the Rear-Facing position, do not use this child restraint.



 Lap Belt



 Lap/Shoulder Belt

WARNING:



Never place a child rear-facing in a seating position with an active frontal airbag. This can result in serious injury or death.


Check the vehicle belt before each use. Use only if the belt is tightened properly and securely.

This child restraint must always face the rear of the vehicle when installed.

Failure to follow these warnings can result in serious injury or death.



E-6 Installing Child Restraint with Vehicle Belts



1. *Place Child Restraint in Vehicle Rear-Facing*

Center the child restraint in the chosen seating position.

Check the level to ground line to see if it is level with the ground. Adjust if needed.

NOTE: The carrying handle can be in any locked position when installed in the vehicle.




2. *Thread Vehicle Belt*

Thread vehicle lap belt only through the belt path (as shown). Buckle the vehicle belt.



3. *Tighten Vehicle Belt*



Lay your forearm across child restraint at the belt path while pulling up on belt to tighten. With an ALR belt, pull the belt all the way out before tightening. Feed the slack back into the retractor while tightening.



4. Check for Proper Recline

Make sure level line on side of child restraint is level with the ground. Adjust child restraint if needed.

You may need to place a large rolled towel(s) or foam pool noodle(s) under the front of the child restraint to achieve correct recline angle. Check often to be sure padding is still in place and the belt is tight.



5. Check Vehicle Belt Tightness

Grasp the child restraint at the belt path with one hand. Push and pull the child restraint from side to side, forward and back. The child restraint should not move more than 1 inch.

NOTE: If child restraint moves more than 1 inch, try reinstalling the child restraint or try another seating location.

Warranty

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:

This product is warranted against defective materials or workmanship for one year from the date of original purchase. **An original receipt is required to validate your warranty.** DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty you may contact us at www.djgusa.com, fax us at 1-800-207-8182 24 hours a day, write to DJG, Consumer Relations Department, P. O. Box 2609, Columbus, IN 47202-2609, or call 1-800-544-1108 from 8:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 8:00 a.m. to 4:30 p.m. on Friday. **Proof of purchase is required and shipping charges are the responsibility of the consumer.**

Warranty Limitations:

This warranty does not include damages which arise from misuse or abuse of this product.

Limitation of Damages:

The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

Limitation of warranties and other warranty terms and state law rights:

Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product. PLEASE COMPLETE AND MAIL THE PRE-ADDRESSED OWNER REGISTRATION CARD WITHIN (30) DAYS OF PURCHASE TO EXPEDITE WARRANTY CLAIMS AND TO VERIFY THE ORIGINAL DATE OF PURCHASE.

Replacement Parts Order Form

Complete the form below. Your model number with color code and manufacturer date code **MUST** be included on the form to ensure proper replacement parts. Your model number with color code and the date code can be found on a sticker on the side of child restraint. Payment in U.S. dollars must accompany your order. Choose parts needed from the list on the next page.

Return the form with payment to:

Dorel Juvenile Group, Inc.
Consumer Relations Department
P.O. Box 2609
Columbus, IN 47202-2609

Fax orders to: 1-800-207-8182

Please make money orders payable to Dorel Juvenile Group, Inc. Fill in the area below to charge to Visa or Mastercard. We do not accept personal checks or Discover Card. All outside of U.S. and Canada **MUST** use credit card.

Ship To (Please Print): _____

Name: _____

Address: _____

City: _____

State/Province: _____ Zip _____

Telephone: _____

Email Address: _____

We **MUST have this information
to process your order:**

Model Number (5 digits & 3 letters): _____

Manufacture Date (mm/dd/yyyy): _____

Replacement Parts List

NOTE: If requested color is not available, similar color will be substituted.

Part	Cost	Quantity	Total Cost
Buckle Strap/Buckle....	\$6.99	X _____	= \$ _____
Harness Strap	\$2.00	X _____	= \$ _____
Pad Set	\$19.99	X _____	= \$ _____
Chest Clip.....	\$1.50	X _____	= \$ _____
Locking Clip	\$2.50	X _____	= \$ _____
Non Adjustable Base .	\$29.99	X _____	= \$ _____
Adjustable Base	\$34.99	X _____	= \$ _____
Instructions	\$0.00	X _____	= \$ _____

Merchandise Total \$ _____

Shipping and handling: \$ _____

Up to \$25.00.....	\$5.95	\$100.01 to \$150.00	\$10.95
\$25.01 to \$50.00	\$6.95	\$150.01 to \$200.00	\$11.95
\$50.01 to \$75.00	\$8.95	\$200.01 and up	\$13.95
\$75.01 to \$100.00	\$9.95		

Outside Continental USA \$10.00

Sales Tax \$ _____
(Arizona, California, Georgia, Indiana, Missouri, South Carolina, and Texas residents add applicable sales tax.)

Grand Total \$ _____

No shipping and handling on instructions for quantities under 6. Add \$.50 for each instruction over 6, then add applicable shipping and handling.

CUT ON DOTTED LINE

Fill Out For Credit Card

☐ Visa ☐ Mastercard

Card Exp. Date: _____

Cardholder's Name: _____

Card Number: _____

Signature _____