


# Freestanding Vanity INSTALLATION INSTRUCTIONS

---

Swiss Madison®  
well made forever

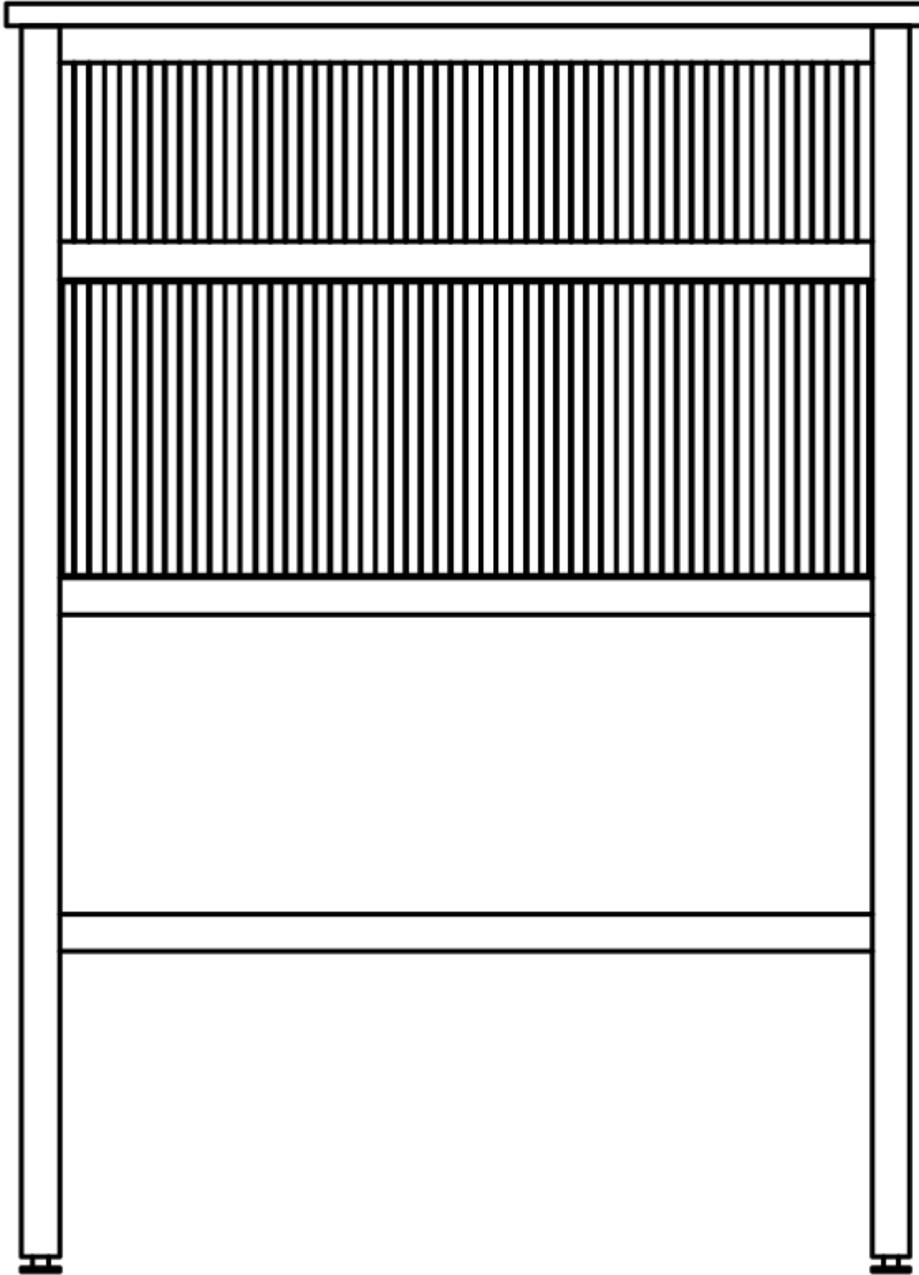

@SwissMadison  
#WellMadeForever





## PRIOR TO INSTALLATION:

- Inspect product to ensure no damages have occurred while in shipping.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- Floor must be level prior to installation of vanity.
- All dimensions are nominal! Be sure to measure your vanity prior to installation.
- The step-by-step guidelines in the installation instructions are a general reference. Should there be any discrepancies, Swiss Madison cannot be held liable. It is recommended to install all Swiss Madison products by hiring a licensed professional.
- Read installation and maintenance instructions thoroughly before installing. Be sure to use proper tools and always wear proper personal safety accessories for your protection.

If you have any questions or concerns please contact us:  
 1-434-623-4766  
[info@swissmadison.com](mailto:info@swissmadison.com)

## SUGGESTED TOOLS & MATERIALS:



Safety Glasses



Allen Wrench



Screwdrivers




Silicone



Drop Cloth



Level



Adhesive




Drill




Gloves

## INCLUDED PARTS:



Vanity Base



Vanity Sink




Hardware

**Parts for Reference:**


- 1:Left side panel
- 2:Right side panel
- 3:Near bottom panel
- 4:Bottom panel
- 5:Top drawer panel
- 6:Drawer panel
- 6-1:Drawer left panel
- 6-2:Drawer right panel
- 6-3:Drawer bottom panel
- 6-4:Drawer left back panel
- 6-5:Drawer right back panel

- A.Cam bolt
- B.Cam lock
- C.Cam patch

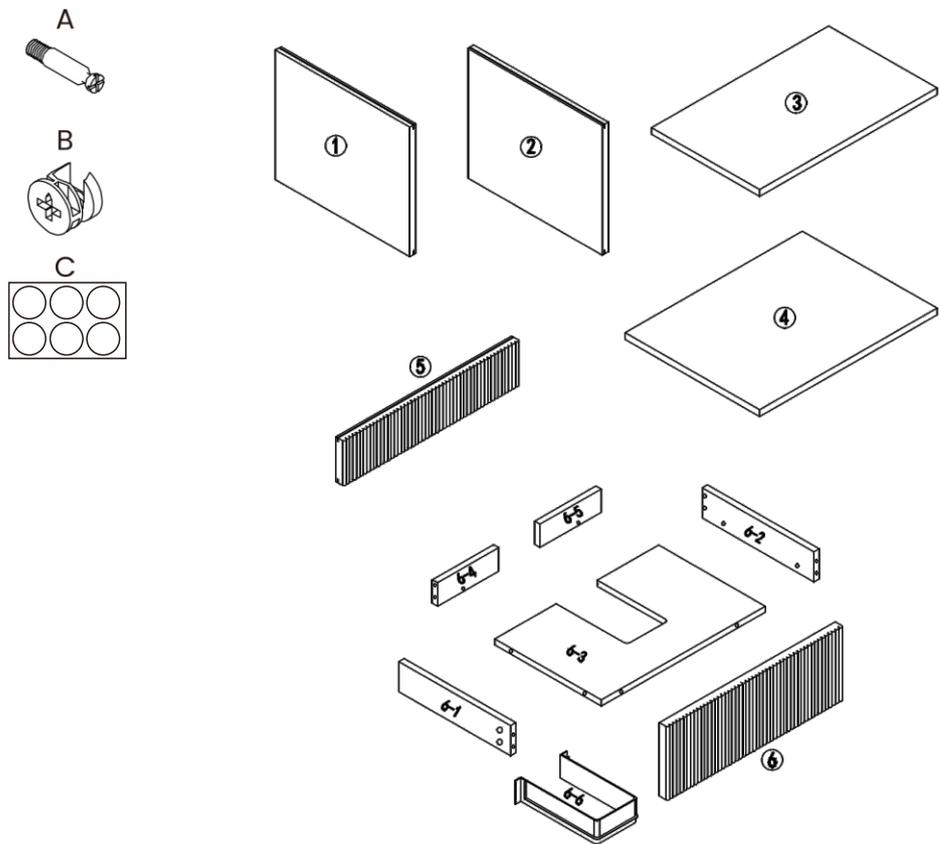


## 1.Install drawer panel

- Screw 4 cam bolts(A)into the left side panel(1) .Repeat for the right side panel(2)
- Screw 1 cam bolts(A)into the drawer left back panel(6-4) . Repeat for the Drawer right back panel(6-5)
- Screw 6 cam bolts(A)into the drawer panel(6)

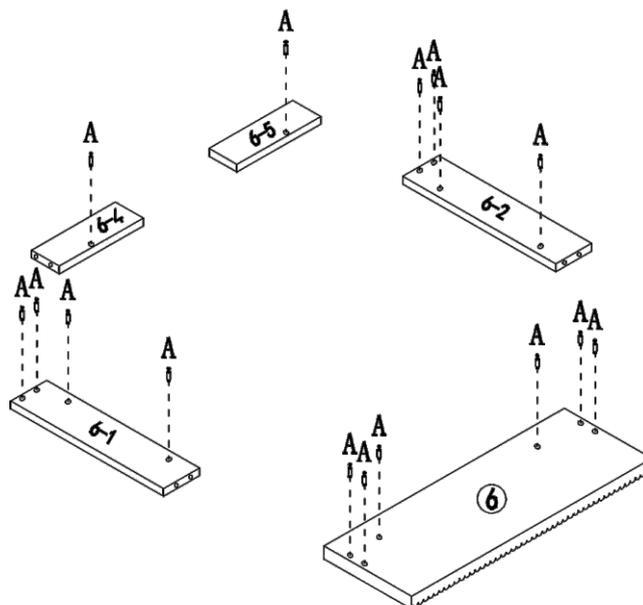

## 2. Assemble drawer panel


- Connect the drawer left /right back panel (6-4/6-5) to the drawer bottom panel (6-3) Use 2 cam locks (B) to secure in the place.
- Attach the drawer back panel (6-4/6-5) and drawer bottom panel (6-3) to the drawer left side panel(6-1) and secure using 4 cam locks(B).
- Repeat for the drawer right side panel(6-2).
- Connect the drawer front panel (6) to the left/right drawer side panel Use 6 cam locks (B) to secure in the place.

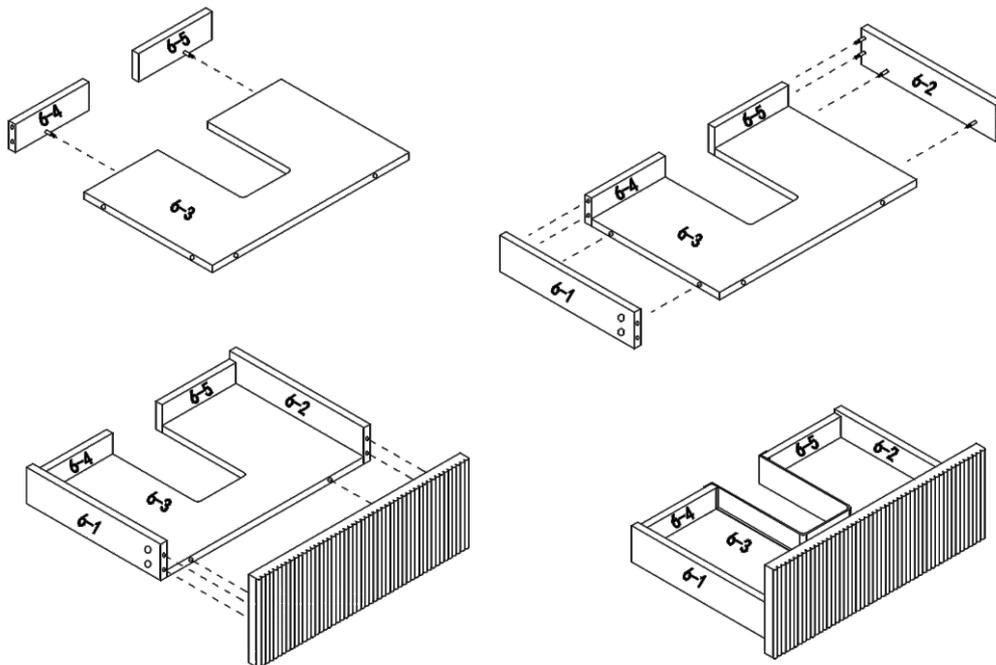

## 3. Install aluminum frame


| PARTS LIST |       |                                   |     |     |       |              |     |
|------------|-------|-----------------------------------|-----|-----|-------|--------------|-----|
| NO.        | PARTS | NAME                              | QTY | NO. | PARTS | NAME         | QTY |
| ①          |       | Aluminum frame                    | 2   | ⑤   |       | M4x14 screws | 27  |
|            |       |                                   |     | ⑥   |       | M4x20 screws | 2   |
| ②          |       | 25x25x540 Aluminum bar            | 3   | ⑦   |       | drawer       | 1   |
| ③          |       | 25x25x540 Aluminum bar with holes | 4   |     |       |              |     |
| ④          |       | M4x10 screw                       | 14  | ⑧   |       | slide rail   | 1   |

- Connect the aluminum frame (1) to the 25\*25\*540 aluminum bar (2) use 6 M4\*10 screw (4).
- Connect the aluminum frame (1) to the 25\*25\*540 aluminum bar (3) use 8 M4\*10 screw (4). Note that the aluminum bar with hole (3) is installed at the bottom.
- Attach the drawer (7) to the aluminum frame and secure using 8 M4\*20 screw (5).
- Attach the slide rail to the left/right side panel and secure using 8 M4\*14 screw. Please note that there are two screws that need to be punched at the positions marked on both ends of the slide rail.
- Connect the slide rail to the bottom of the drawer side panel use 2 M4\*20 screw to secure in the place when the drawer is installed

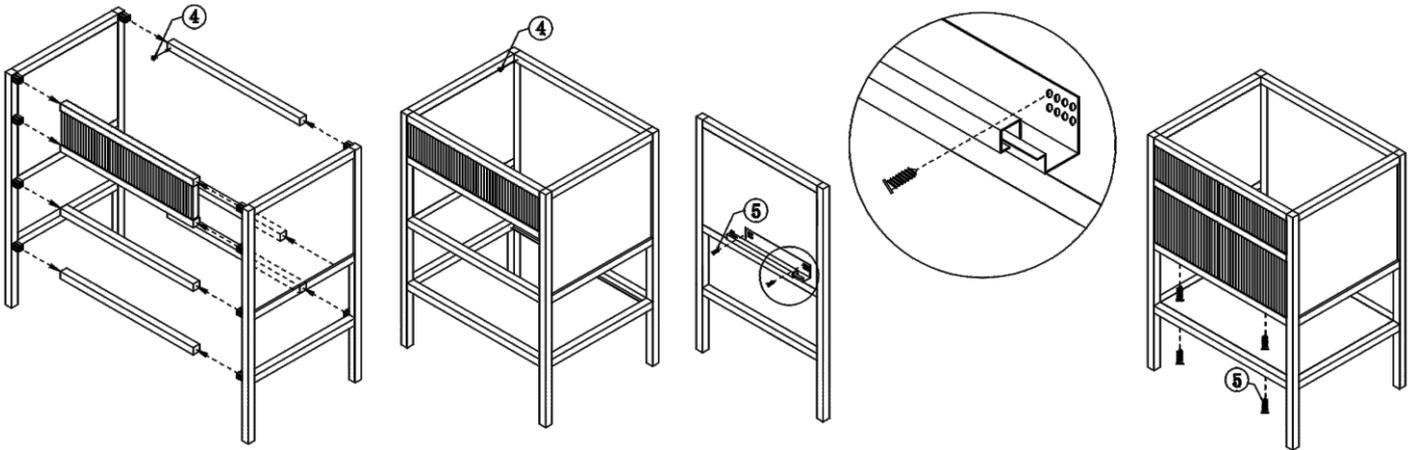

## 4. Vanity Top Installation

- Install faucet and drain according to manufacturer's installation instructions. Do not overtighten, this may cause the sink to crack.
- Set the vanity top on top of the vanity base, checking the location of the p-trap and drain.
- Remove vanity top from vanity base. Apply a thin bead of silicone around the vanity base and set the vanity top carefully in place.
- Remove excess silicone with a wet cloth.

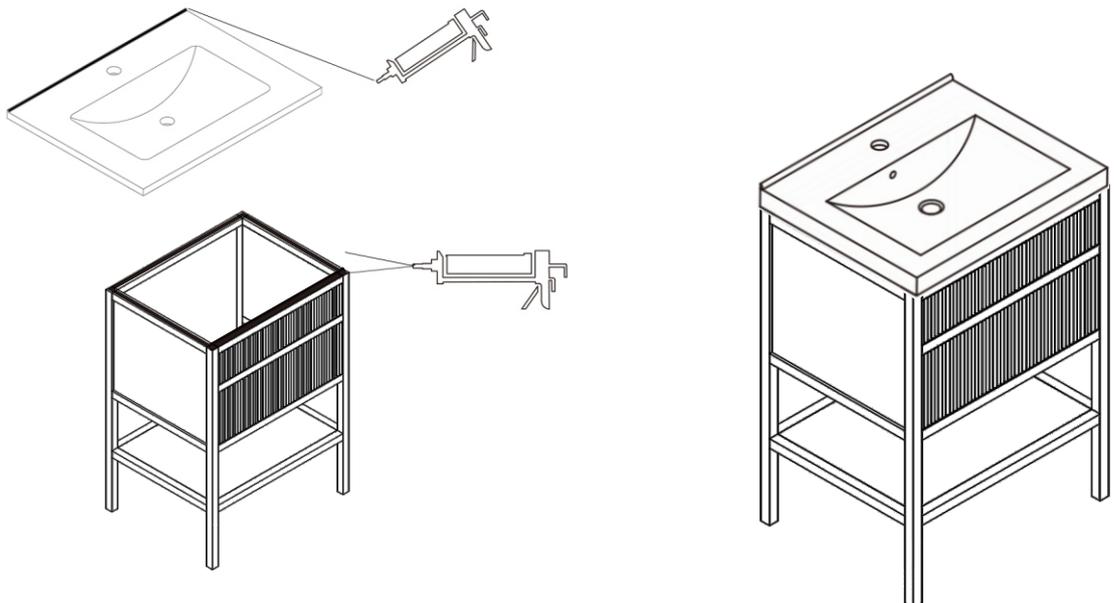

Wait 24 hours  
before use.





1-434-MADISON  
(623-4766)

[www.swissmadison.com](http://www.swissmadison.com)

## ONE YEAR LIMITED WARRANTY

Swiss Madison® products are made with quality materials and excellent craftsmanship to provide our customers with beautiful, durable, long-lasting products. Should there be any defects in materials or craftsmanship under regular use that are discovered within the first year of installation, Swiss Madison® will provide replacement parts at no charge, or at its discretion, replace any product or part of the product that is deemed defective, under normal installation, use, service or maintenance. This warranty applies only to the original purchaser. Proof of purchase will be required in the instance of a claim.

Swiss Madison® recommends all installations of Swiss Madison® products to be conducted by a licensed, professional plumber or contractor. Swiss Madison® will not be held responsible for any damage or product failure due to improper installation, misuse, or failure to utilize a licensed professional for installation. Swiss Madison® is not responsible for any installation or removal costs.

### This One Year Limited Warranty Will Be Voided If:

- The installation recommendations were not followed by the installer
- The product has been moved from its initial place of installation
- The product has in any way been modified from its packaged state
- The product has been subjected to improper maintenance, abuse, misuse, excessive use of chemicals, accidents, or other damages, etc.

Swiss Madison® makes no implication that its products comply with any local building or plumbing codes. It is the consumer's responsibility and obligation to determine local code compliance prior to and during installation. This warranty extends only to the original purchaser and first consumer.

Swiss Madison® is not responsible for any special, incidental or consequential damages associated with the installation, replacement, return or use of the original purchaser's product. This includes, but is not limited to: freight costs, labor, travel time, lost profit, home damages and other contingent liabilities and costs (including, without limitation, costs associated with 'professionals' or 'experts', investigations, audits, analyses, attorneys and any other professional/hired services).

The Swiss Madison® warranty is a comprehensive and explicit limit of liability. All items not disclosed within the warranty are not addressable within the responsibility of Swiss Madison®. Certain states have variances regarding implied warranties; in those situations, we remain fully compliant.

**If you have any questions or concerns, please contact us directly at  
1-434-MADISON (623-4766)**

 **WARNING:** Contents of your order may contain sharp and possibly other harmful pieces and may cause hazard to children and adults. Swiss Madison® is not responsible in any way for personal damages.