

Jones Stephens' PlumBite® Push to Connect Repair Couplings

Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
Tag	_____ PO# _____

Specifications

Jones Stephens' PlumBite® Push to Connect Repair Couplings are a heat-free method of joining Copper and/or CPVC tubing, designed to save time on installation and to connect piping with relative ease and confidence. No soldering, glue, heat or external tools are required to join the pipe. Just insert the pipe and the stainless steel gripper ring, bite down, and hold the pipe tightly while the EPDM o-ring seals against leakage. Disassembly is just as fast using the optional disassembly tool, so fittings can be easily removed and re-used.

Applications


Jones Stephens' PlumBite® Push to Connect Repair Couplings are approved for use with commercial and residential potable and non-potable water applications.

Materials

- Body-DZR Brass
- O-Ring- EPDM, Peroxide Cured
- Gripper Ring- Stainless Steel

Dimensions and Product Offering

PART NO. INDIVIDUAL	PART NO. BULK	A NOMINAL (IN.)	B (IN.)	B TOLERANCE +/- (IN.)
C77470LF*	C76530LF	0.50	4.45	0.08
C77471LF*	C76531LF	0.75	4.47	0.08
C77472LF*	C76532LF	1.00	4.34	0.08

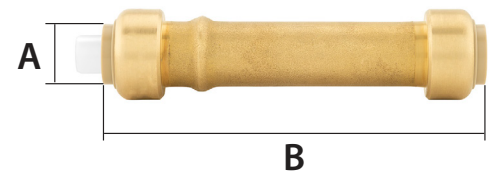

Performance Specifications

- Maximum Temperature - 180°F
- Maximum Pressure - 200 PSI
- Service: Potable Water
- Exposure to water with elevated levels of inorganic materials (including but not limited to Cl, Na, Mg, Ca, K), especially in high temperatures and high water velocity areas, could quicken the corrosion process.

Certifications/Listings/Approvals

- NSF/ANSI/CAN 61 SDWA Compliant
- NSF/ANSI/CAN 372 Lead Law Compliant
- NSF/ANSI 14 MASS Approved
- ASSE 1061 Vermont Act 193 Compliant



* Tool included to assist installation

