
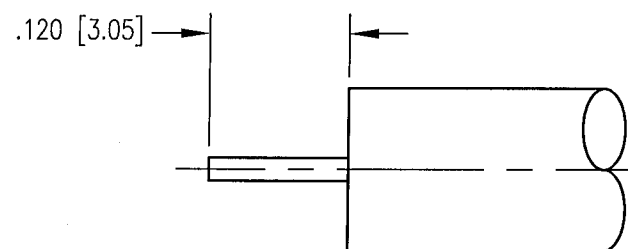
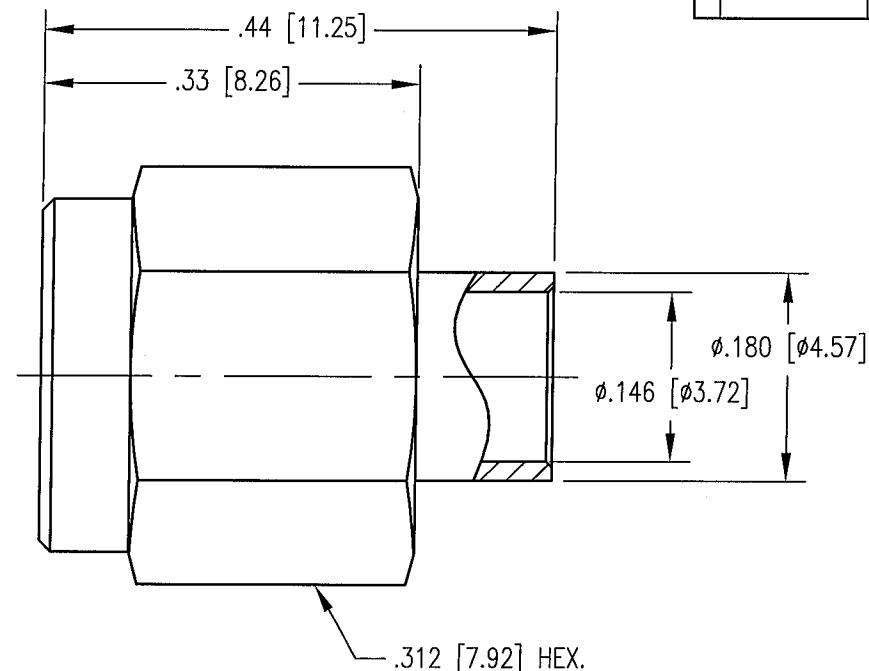



DWG. NO.		250-500-1412P	
REV	DESCRIPTION	BY DATE	APPD
C	ECR 7083	JED 10/31/91	JED

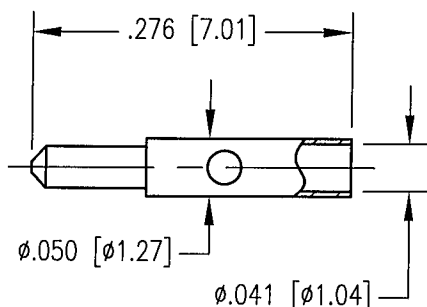

CABLE TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:

BODY AND NUT: STAINLESS STEEL PER ASTM A582
 CONTACT: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
 RETAINING RING: BERYLLIUM COPPER PER B194
 GASKET: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 NUT: PASSIVATED PER ASTM A967

3. FOR CABLING PROCEDURE USE CAP 5-02 WITH TRIMMING DIMENSIONS SHOWN.

4. FOR USE WITH RG-402 (.141 S.R.) CABLE OR EQUIVALENT.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS .XX ± .01/.0254 XXX ± .005/0.127 ANGLES ± 2° SCALE: 8:1				Litton Winchester/Retconn 400 Park Road Waterbury, Connecticut 06795			
CUSTOMER DRAWING				TITLE SMA PLUG, SOLDER TYPE			
DRAWN KJT	DATE 10/25/99	CHECKED JED	DATE 10/26/99	A 250-500-1412P SHT. 1 OF 1 REV. C			
APPROVED JMC	DATE 10/26/99	APPROVED JC	DATE 10/26/99				