


covRguard® LED Tubes

T5 Type B Double Ended
Plastic Sleeved Glass

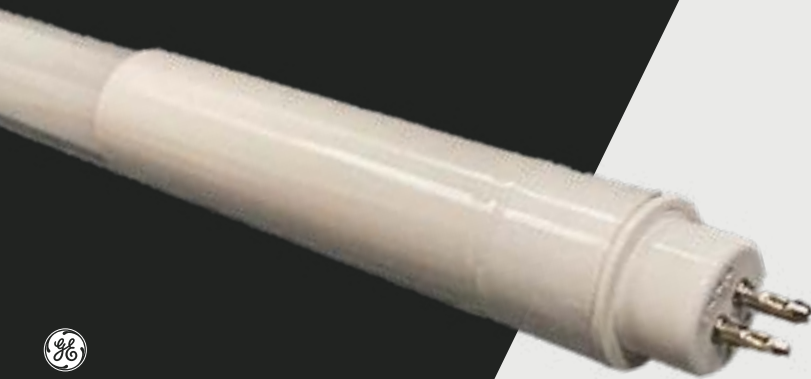

Project Name _____

Date _____ Type _____

Notes _____

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. With Type B the existing fixture is wired to bypass the ballast, which further reduces energy use and eliminates the need to check ballast compatibility. Additional maintenance savings are realized by removing costs associated with replacing ballasts. covRguard®, polycarbonate sleeved glass, ensures long-term durability and shatter protection.

IDEAL FOR DEMANDING APPLICATIONS

- Industrial and Commercial Buildings
- Close proximity to food production or retail
- Applications with shatter/contamination concerns
- Added protection for production/employees/customers

PERFORMANCE HIGHLIGHTS

Light Output Range:	3200-3400 Lumens
CRI:	80
CCT:	3000K, 3500K, 4000K & 5000K
Wattage:	25W
Life:	50,000 hours L70
Temperature Rating:	-20°C to +45°C
Rating:	Damp
Fixtures:	Open or Enclosed
Certification:	NSF Food Zone
Dimming:	Power Line (contact Current for more info)

LIMITED WARRANTY

5 Years

MATERIAL DIFFERENCE

- Glass Tube and Polycarbonate sleeve
- Long-term durability with optimal light distribution
- No sag over time
- Factory sealed rigid CovRguard containment

MOST RIGOROUS NSF RATING

- NSF FOOD ZONE RATED
- Certified 1M drop test
- Easy Regulatory compliance
- Eliminates need for field installed sleeve or fixture guard

BENEFITS

- Direct wire to bypass the ballast; reduces energy use, eliminates ballast compatibility and associated replacement maintenance costs
- No socket replacement necessary be used with Shunted or Un-Shunted sockets
- Superior replacement for solid plastic tubes with more durability
- 66% longer life than LFL (50,000 vs. 30,000 hours)
- Better quality of light-instant on
- Easy disposal, non-hazardous waste
- Internal safety switch provides protection for the installer
- Internal misapplication circuit provides protection if lamp is placed into ballasted fixture
- In-line fuse kit protects the installer if LFL is reinstalled in the future (optional, sold separately)

covRguard® LED Tubes

T5 Type B Double Ended
Plastic Sleeved Glass

Spec Table

Project Name _____


Date _____ Type _____

Notes _____

Type	Base Type	Watts	Order Code	Description	Volts	Case Qty.	MOL (in.)	Lumens Initial	CCT	CRI	Power Factor	DLC®	UL	#Location Rating	Additional Info
4FT COVRGUARD LED TUBES															
T5	G5	25	93155902	LED25BDT5/G4/830/CVG	120-277	20	46	3200	3000K	80	>.9	-	Yes	Damp	NSF Food Zone
	G5	25	93155903	LED25BDT5/G4/835/CVG	120-277	20	46	3300	3500K	80	>.9	-	Yes	Damp	
	G5	25	93155904	LED25BDT5/G4/840/CVG	120-277	20	46	3400	4000K	80	>.9	-	Yes	Damp	
	G5	25	93155905	LED25BDT5/G4/850/CVG	120-277	20	46	3400	5000K	80	>.9	-	Yes	Damp	

In-Line Fuse

Order Code	Description	Kit Contents
39017	BT8-1AFUSEKIT	1 Fuse (1A), 1 Fuse Holder

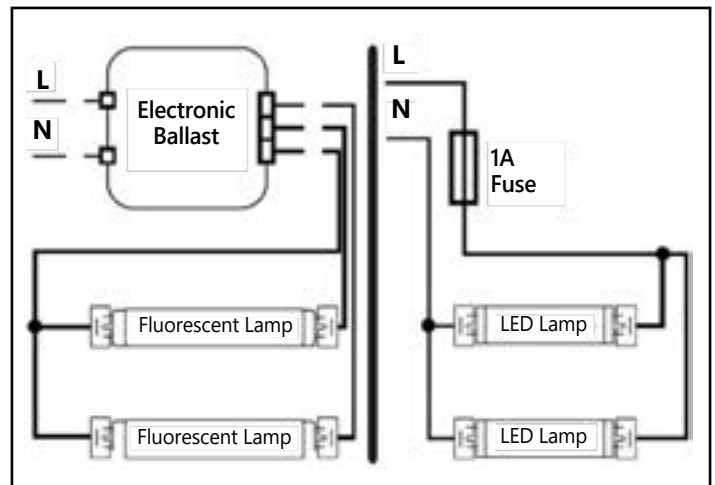

POWER LINE DIMMING OPTION

(Contact Current for more information)

