



# Linear Fluorescent to LED Tube Table



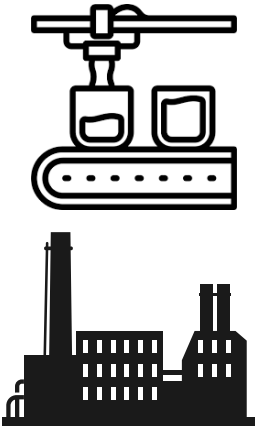
Base Type	Linear Fluorescent Lamp Type	Linear Fluorescent		Ballast Bypass (Type B) LED Tube				Ballast Compatible (Type A) LED Tube				Color Temp.	
				50,000 Hours		70,000 Hours		50,000 Hours		70,000 Hours			
		Order Code	Description	Order Code	Description	Order Code	Description	Order Code	Description	Order Code	Description		
G13 Med Bi-Pin	4FT T8 High Lumen	10326	F32T8XLSPX35HLEC	93125618	LED16BDT8/G4/835	93132587	LED16BDT8/G4/835XL			35768	LED18ET8/G/4/835	3500K	
		10322	F32T8XLSPX41HLEC	93125620	LED16BDT8/G4/840	93132588	LED16BDT8/G4/840XL			35769	LED18ET8/G/4/840	4000K	
		42556	F32T8XLSPX50HLEC	93125622	LED16BDT8/G4/850	93132589	LED16BDT8/G4/850XL			35772	LED18ET8/G/4/850	5000K	
	4FT T8 Full Wattage	68850	F32T8/SPX30/ECO2	39493	LED14BDT8/G4/830	93132552	LED13BDT8/G4/830XL	34283	LED14ET8/G/4/830	35790	LED15ET8/G/4/830	3000K	
		68851	F32T8/SPX35/ECO2	39494	LED14BDT8/G4/835	93132553	LED13BDT8/G4/835XL	34289	LED14ET8/G/4/835	35791	LED15ET8/G/4/835	3500K	
		68852	F32T8/SPX41/ECO2	39498	LED14BDT8/G4/840	93132554	LED13BDT8/G4/840XL	34291	LED14ET8/G/4/840	35793	LED15ET8/G/4/840	4000K	
		68853	F32T8/SPX50/ECO2	39519	LED14BDT8/G4/850	93132555	LED13BDT8/G4/850XL	34300	LED14ET8/G/4/850	35797	LED15ET8/G/4/850	5000K	
		66342	F32T8/SPX65/ECO2							35798	LED15ET8/G/4/865	6500K	
		72864	F28T8/XLSPX35ECO	93117213	LED11BDT8/G4/835	93132549	LED9BDT8/G4/835XL	93107391	LED11ET8/G/4/835	34279	LED10ET8/G/4/835	3500K	
	4FT T8 28W	72866	F28T8/XLSPX41ECO	93117214	LED11BDT8/G4/840	93132550	LED9BDT8/G4/840XL	93107392	LED11ET8/G/4/840	34280	LED10ET8/G/4/840	4000K	
		72867	F28T8/XLSPX50ECO	93117215	LED11BDT8/G4/850	93132551	LED9BDT8/G4/850XL	93107393	LED11ET8/G/4/850	34282	LED10ET8/G/4/850	5000K	
		72129	F32T8/25WSPX35EC	93117213	LED11BDT8/G4/835	93132549	LED9BDT8/G4/835XL	93107391	LED11ET8/G/4/835	34279	LED10ET8/G/4/835	3500K	
	4FT T8 25W	72130	F32T8/25WSPX41EC	93117214	LED11BDT8/G4/840	93132550	LED9BDT8/G4/840XL	93107392	LED11ET8/G/4/840	34280	LED10ET8/G/4/840	4000K	
		72131	F32T8/25WSPX50EC	93117215	LED11BDT8/G4/850	93132551	LED9BDT8/G4/850XL	93107393	LED11ET8/G/4/850	34282	LED10ET8/G/4/850	5000K	
		45754	F25T8/SP35/ECO	39547	LED12BDT8/G3/835					35784	LED11ET8/G/3/835	3500K	
	3FT T8 Full Wattage	45756	F25T8/SP41/ECO	39554	LED12BDT8/G3/840					35788	LED11ET8/G/3/840	4000K	
		45743	F17T8/SP35/ECO	39560	LED9BDT8/G2/835					35776	LED8ET8/G/2/835	3500K	
	2FT T8 Full Wattage	45748	F17T8/SP41/ECO	39561	LED9BDT8/G2/840					35778	LED8ET8/G/2/840	4000K	
	G5 Mini Bi-Pin	4FT T5 High Output	46760	F54W/T5/835/ECO	93100293	LED25BDT5/G4/835			19221	LED26ET5/G/4/835			3500K
			46761	F54W/T5/841/ECO	93100294	LED25BDT5/G4/840			19227	LED26ET5/G/4/840			4000K
46762			F54W/T5/850/ECO	93100295	LED25BDT5/G4/850			19348	LED26ET5/G/4/850			5000K	
4FT T5 High Efficiency		46705	F28W/T5/835/ECO	93128355	LED14BDT5G4835HE			34354	LED13ET5G4/835HE			3500K	
		46706	F28W/T5/841/ECO	93128486	LED14BDT5G4840HE			34355	LED13ET5G4/840HE			4000K	
		46707	F28W/T5/850/ECO	93128487	LED14BDT5G4850HE			34367	LED13ET5G4/850HE			5000K	
Fa8 Single Pin	8FT T8	68869	F96T8/XL/SPX35/2	93122171	LED34BDT8/G/8/835							3500K	
		68870	F96T8/XL/SPX41/2	93122172	LED34BDT8/G/8/840							4000K	
		68871	F96T8/XL/SPX50/2	93122174	LED34BDT8/G/8/850							5000K	
		15123	F96T8/XLSPX41WMP	93122172	LED34BDT8/G/8/840							4000K	
R17d Recessed Double Contact	8FT T8 High Output	12533	F96T8/SPX35/HO	93132591	LED43BDT8/G8/835							3500K	
		12534	F96T8/SPX41/HO	93132592	LED43BDT8/G8/840							4000K	
		12535	F96T8/SPX50/HO	93132593	LED43BDT8/G8/850							5000K	

Fuse Kit for Type B LED Tubes  
1 Fuse (1A), Fuse Holder

39017	BT8-1AFUSEKIT
-------	---------------



# LED Tubes Application Guide

APPLICATION	PREFERRED SOLUTION	DAMAGE RESILIENCE	BENEFITS
	Office & General Lighting	Glass	<p><b>GOOD</b></p> <p>No Protection (Not NSF Rated)</p> <ul style="list-style-type: none"> <li>• Most economical option for large scale retrofit project</li> <li>• Glass tube is rigid over time</li> </ul>
	Grocery & General Retail	PET Coated Glass	<p><b>BETTER</b></p> <p>Shatter Protection</p> <ul style="list-style-type: none"> <li>• PET coating provides shatter containment, reducing downtime</li> <li>• Economical option vs. plastic</li> </ul>
	Food Processing & Industrial	covRguard® Heat-sealed Polycarbonate Sleeved Glass	<p><b>BEST</b></p> <p>Shatter Resistance &amp; Protection</p> <ul style="list-style-type: none"> <li>• Shatter resistant &amp; certified drop test containment</li> <li>• Most robust materials &amp; 70,000-hour long life rating</li> <li>• Best shatter protection + longest life = maximum protection &amp; minimum disruption (fewer re-lamps)</li> </ul>