



CUSTOMER NAME _____

Project Name _____

Date _____ Type _____

Catalog Number _____

LBR 24 Series

Backlit Recessed 2'x4' LED

Lumination® **LBR Series** Recessed LED Luminaires are for commercial ceilings providing high uniformity, excellent efficiency and reduced glare for T-grid ceiling applications. The lumen maintenance of greater than L85 at 50,000 hours operation, allows for lower maintenance costs. With access to the power supply through a drop down door frame, it is suitable for indoor general lighting for both new construction and retrofit luminaire replacements.

CONSTRUCTION

Housing:	Durable, long lasting steel construction. Steel, galvanized, cold-rolled, commercial quality
Lens:	Precision formed optical assembly drop down door with access to the power supply from underneath the ceiling plane comprised of high specularly reflective paint
Paint:	Post painted powder coat finish on housing
Weight:	16lbs

OPTICAL SYSTEM

Lumens:	Up to 7200 Lumens
Wattage:	Up to 58.5 Watts
Efficacy:	Up to 130 LPW
CCT:	3500K/4000K/5000K
CRI:	80+, R9 >0
Distribution:	Medium Lambertian
Color Consistency:	Central limit 4-Step MacAdam Ellipse with LED recipe approach for tight unit to unit color control

ELECTRICAL

Input Voltage:	120-277V, 347V
Input Frequency:	50/60 Hz
Standard Dimming Control:	0-10v Dimming
Power Factor (PF)*:	>0.9*
Total Harmonic Distortion (THD)*:	<20%*
LED Driver Type:	Class 2
Surge Protection:	ANSI C82.77 Compliant

* PF and THD may vary with options

CONTROLS

Dimming:	0-10v Dimming
Sensors:	Daintree Compatible (see Ordering for additional info)

LUMEN AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
OPERATING TEMPERATURE	-20°C to +35°C (-4 °F to +95 °F)
STORAGE TEMPERATURE	-40°C TO +70°C (-40 °F to +158°F)

LUMEN MAINTENANCE

LXX(10K) @ Hours	50,000 HR
L85	

ADDITIONAL FEATURES

- **Typical Mounting:** Fits standard T-Bar grid (drop ceilings)
- **Wiring Access:** 1/2" trade-size KOs on a removable access plate provided
- **T-grid Clips:** T-grid clips included, with holes for seismic wires
- **Surface Mounting:** Surface mount kit available
- **Optional Emergency Battery:** Provides 90-minutes of Emergency lighting. Note, EL option is not available with 347V option. Initial design lumen output: 1400 lumens
- **Optional Chicago Plenum:** Openings in recessed fixture sealed per requirements for CCEA
- **Optional Bypass Relay:** Overrides dimming when emergency generator is used (see ordering notes for limitations)

DESIGN LIFE & WARRANTY

- Damp Location rated
- UL/cUL Listed
- RoHS compliant
- Reliability Testing: Components and systems evaluation
- Current's Limited Warranty: System Warranty: 5 Year (Please refer to document **IND599** for more information)

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

Ordering Information
LBR 24 A MM LT WHITE

FAMILY	FIXTURE TYPE	GENERATION	VOLTAGE	NOMINAL LUMENS	DISTRIBUTION	CRI/CCT	CONTROLS	MOUNTING	FINISH	OPTIONS
LBR = Lumination Backlit Recessed	24 = 2' x 4'	A = 1 st Generation	O = 120-277V D = 347V	30 = 3000 40 = 4000 48 = 4800 60 = 6000 72 = 7200	MM = Med. Lambertian	835 = 80CRI, 3500K 840 = 80CRI, 4000K 850 ¹ = 80CRI, 5000K		LT = T-Grid	WHITE= White	(blank) = None CP = Chicago Plenum EL ³ = Emergency Light B2 ⁴ = Emergency Light Bypass - Dual Shunt Relay to be used with building generator backup systems to override dimming

EXAMPLE CONFIGURATIONS	LUMINAIRE LUMENS	LUMINAIRE TOTAL SYSTEM WATTS	LUMINAIRE LPW ⁵
LBR24A030MM835VQLTWHITE	3000	23.0	130
LBR24A040MM835VQLTWHITE	4000	31.0	129
LBR24A048MM835VQLTWHITE	4800	37.0	130
LBR24A060MM835VQLTWHITE	6000	47.5	126
LBR24A072MM835VQLTWHITE	7200	58.5	123
LBR24A030MM840VQLTWHITE	3000	23.0	130
LBR24A040MM840VQLTWHITE	4000	31.0	129
LBR24A048MM840VQLTWHITE	4800	37.0	130
LBR24A060MM840VQLTWHITE	6000	47.5	126
LBR24A072MM840VQLTWHITE	7200	58.5	123
LBR24A030MM850VQLTWHITE	3000	23.0	130
LBR24A040MM850VQLTWHITE	4000	31.0	129
LBR24A048MM850VQLTWHITE	4800	37.0	130
LBR24A060MM850VQLTWHITE	6000	47.5	126
LBR24A072MM850VQLTWHITE	7200	58.5	123

CONTROL OPTIONS	DESCRIPTIONS
VQ	0-10v Dimming
TQ	Daintree Enterprise Wireless Enabled ²
TS	Daintree Enterprise Wireless Enabled with Daintree WFA100
TZ	Daintree Enterprise Wireless with fixture integrated sensor
TT	Daintree EZ Connect Wireless with fixture integrated sensor
T1	Daintree One with fixture integrated sensor with factory programmed preset4
SQ	Digital Input Driver (does not have 0-10v input) that uses a field installed accessory (in the ceiling -not the fixture) that is Daintree compatible such as Daintree One, EZ Connect or Enterprise sensors

Ordering Notes:

- Contact manufacturer for lead times
- Most commonly ordered for Daintree Enterprise Wireless Enabled
- EL option not available in 347V. Test switch is remote mounted on a wall or ceiling next to fixture.
- Not available on VQ control option.
- Most Standard base SKU's are DLC, there are exceptions for 347V and EL for meeting PF and/or THD results. Please check the DLC QPL.
- Bypass is not available with 347V and cannot be selected with EL.


ACCESSORIES	DESCRIPTION CODE	PRODUCT CODE
Drywall mount Kit 2' x 4'	GESK11	69523
2' x 4' Surface Mount kit for Backlit T-grid	B24SMK	212463

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

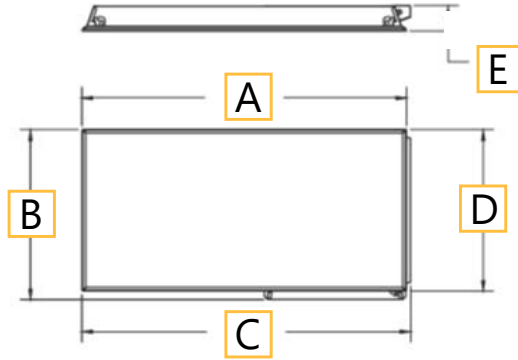
DIMENSIONS


- A** = 47.78in (1214mm)
- B** = 25.08in (637mm)
- C** = 48.38in (1229mm)
- D** = 23.82in (605mm)
- E** = 3.76in (96mm)

PHOTOMETRIC DATA

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	% OF FIXTURE
0-20	592.83	12.40
0-30	1264.23	26.30
0-40	2081.58	43.40
0-60	3724.54	77.60
0-80	4686.99	97.60
0-90	4792.14	99.80
10-90	4639.24	96.70
20-40	1488.75	31.00
20-50	2346.69	48.90
40-70	2249.69	46.90
60-80	962.45	20.10
70-80	355.72	7.10
80-90	105.15	2.20
90-110	2.58	0.10
90-120	3.50	0.10
90-130	4.42	0.10
90-150	6.33	0.10
90-180	7.85	0.20
110-180	5.27	0.10
0-180	4799.99	100.00

ZONAL LUMEN SUMMARY	
ZONE	LUMENS
0-10	152.90
10-20	439.93
20-30	671.40
30-40	817.35
40-50	857.94
50-60	785.02
60-70	606.73
70-80	355.72
80-90	105.15
90-100	1.67
100-110	0.91
110-120	0.91
120-130	0.92
130-140	0.97
140-150	0.94
150-160	0.80
160-170	0.53
170-180	0.19

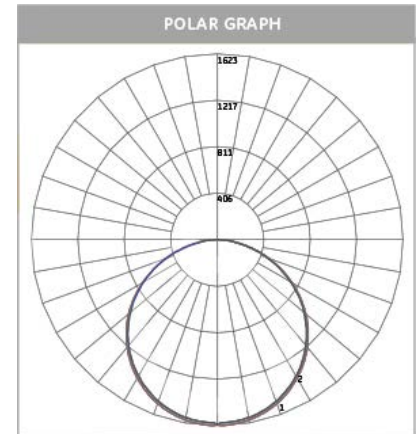

CUSTOMER NAME

Project Name _____

Date _____ Type _____

Catalog Number _____

DAINTREE CONTROLS

Daintree® Wireless Controls:

There is no one size fits all for wireless controls. Some networks want simple solutions that reduce energy consumption and meet code compliance while others are more ambitious, looking to capitalize on the LED and controls savings to fund a scalable, enterprise-grade, internet of things solution. The advantage of the Daintree® Wireless platform is its ability to integrate into indoor, outdoor and high bay environments. The Daintree® Wireless Controls provide the infrastructure to future proof your buildings, easily upgrade to Networked solutions and provide the ability to integrate into IoT solutions that are right for your business.

- **Daintree® One:** Standalone Wireless Controls
- **Daintree® EZ Connect:** Room-Based Wireless Lighting Controls
- **Daintree® Networked:** Networked Lighting Controls for Smart Building & IoT Enablement

Daintree® Wireless Controls are already integrated in your favorite Current LED fixtures. Integrating the controls into the fixture cuts labor costs considerably since the sensors are already embedded in the lighting fixtures. There's no need to get above the ceiling plenum and install additional devices.

Visit our website <https://products.gecurrent.com> for a complete list of LED Fixtures.