

EML5

LED Micro Emergency Light

Product Description

The EML5 LED micro emergency light lighting unit offers you a mini sized unit for those tight spaces or a more discreet application. The EML5 Series is available in white and offers universal mounting, a test button with AC indicator, damp location listing, and a remote capable option. With fully adjustable heads, the EML5 Series complements any design application.

Construction

- Injection molded thermoplastic ABS housing.
- UL-94v-0 Flame rating - Flame Retardant
- Adjustable heads for aiming light where required
 - Head tilt: +25°/-90°
 - Head rotation: 330°
- Damp location rated
- Operating temperature: 32°F - 104°F (0°C - 40°C)

Optical System

- Precision engineered Prismatic Lens

Electrical

- Input power 1.15W at 120/277VAC
- Remote output power 2.4W at 3.6VDC
- Supports up to two (2) single or one (1) double 3.6VDC NICOR remote lamps (see compatibility chart)
- 90 minute capacity (including remote lamps)

Mounting and installation

- Easy installation into a standard junction box or conduit
- Universal mounting plate with EZ quick connect

Finish

- White unpainted ABS Plastic

Warranty



- 1-year limited system warranty standard

Project _____

Catalog _____

Type _____

Date _____

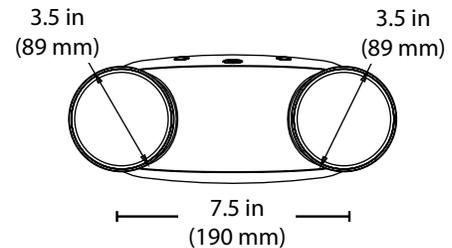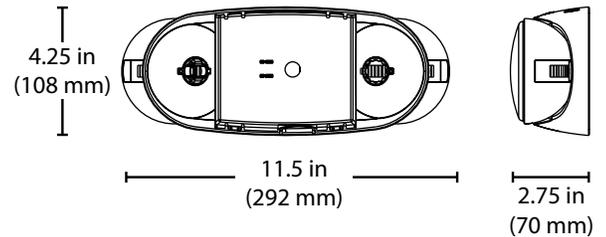

Photometric Data

EML5

Input Voltage (VAC)	120/277
System Level Power (W)	1.15
Delivered Lumens (Lm)	180
System Efficacy (Lm/W)	158.1
Correlated Color Temp (K)	5835
Color Rendering Index (CRI)	74

Compatible NICOR Remote Lamps*

- ERH1
- ERH2
- ERHWP1
- ERHWP2

*Not a complete list. Check compatibility before installation.



Ordering Information

Example: EML510UNVWH

Series	Version	Voltage	Housing Color	Remote Lamp Option
EML5	10 (1.0)	UNV (120-277V)	WH (white)	BLANK (non-remote)
				R (remote lamp capable)