## LED Retrofit Lamps Approved for Hazardous Locations

A Smarter, Safer Switch From HID



RATED FOR CLASS 1, DIVISION 2 A, B, C, D



Industry-leading

ANSI DESIGN




UL-CERTIFIED FIXTURES

GE Filtr-Gard<sup>™</sup> Crouse-Hinds Champ<sup>®</sup> VMV Appleton<sup>™</sup> Mercmaster<sup>™</sup> II Series Appleton<sup>™</sup> Mercmaster<sup>™</sup> III Series



**E39 SOCKET ADAPTER** included for mogul base applications

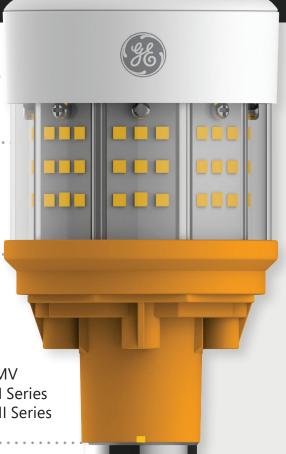

**AVAILABLE ONLY IN TYPE B** 



50,000-hour rated life 2.5x longer life than HID



50% less energy usage with similar light output



High maximum temperature ratings 21W: 65°C | 35W: 55°C 45W: 45°C

Minimum starting temperature: -20°C



5-year; 50,000-hour warranty

Don't compromise where safety is a concern. Choose LED hazardous location lamps from GE Current, a Daintree company. To learn more about hazardous location lighting, visit **products.gecurrent.com/hazardous-location-lighting.** 



© 2020 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.