



TRUE EUROPE

Field's End Road, Goldthorpe, Nr. Rotherham, South Yorkshire S63 9EU, UK
www.truemfg.com • Tel +44 01709 888 080 • Fax +44 01709 880 838
Free Phone 0 800 783 2049 • Free Phone to U.S. 0 800 894 928



11/18 • MS • TFI1070

Model:

T-23G-PT-HC~FGD01

T-Series:

Pass-Thru Glass Swing Door Refrigerator with Hydrocarbon Refrigerant~Framed Glass Door Version 01



NOTE: Photo shown with 3 shelves, model comes standard with 4.


T-23G-PT-HC~FGD01

- ▶ True's combination door pass-thru's are designed with enduring quality that protects your long term investment.
- ▶ Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.
- ▶ Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- ▶ High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- ▶ Stainless steel exterior with aluminum ends and top.
- ▶ Glass front and back doors - "Low-E", double pane thermal glass assembly with extruded aluminum frame. Door locks standard.
- ▶ LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- ▶ Electronic control with exterior temperature display.
- ▶ Adjustable, heavy duty gray PVC coated shelves.
- ▶ Positive seal self-closing doors. Lifetime guaranteed door hinges and torsion type closure system.

Bottom mounted units feature:

- ▶ "No stoop" lower shelf.
- ▶ Storage on top of cabinet.
- ▶ Compressor performs in coolest, most grease free area of kitchen.
- ▶ Easily accessible condenser coil for cleaning.

PLAN VIEW

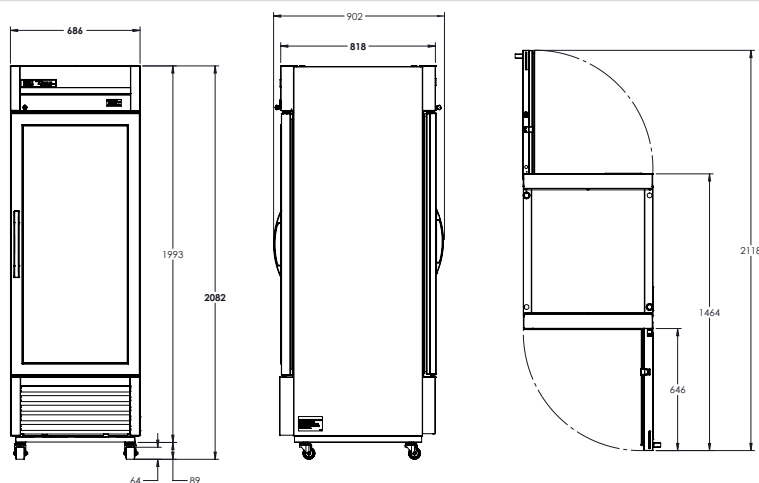

ROUGH-IN DATA

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next 1/8").

Model	Doors	Shelves	Cabinet Dimensions (mm)			HP	Voltage	Amps	Capacity (litres)	Refrigerant	Crated Weight (kg)
			W	D†	H						
T-23G-PT-HC~FGD01	1 fr / 1 bk	4	686	818	2082	1/4	230-240/50/1	1.2	600	R290	---

† Depth does not include 42mm for front door handle and 42mm for back door handle.