JC AND JC-C

Leak Detection

CABLE SECURING CLIPS

01

APPLICATIONS: Use J-clips to secure sensing cables, non-sensing cables, spot detectors in leak detection installations.

02

KEY FEATURES:

- J-Clips should be placed 5 to 6 feet apart throughout an installation, and 3 feet apart when cable is routed in front of CRAC units.
- SC feature a sturdy nylon clip with self-adhesive backing for easy installation.
- SC-C are a more durable, corrosion-resistant design is available for use in SC-C installations.
- Available in 10, 25, 50, and 200 count packages.

All of our sensing cables are manufactured and assembled in the USA.


03

WHAT SETS RLE'S J-CLIPS APART?

- **Safety and security for your cable and your employees.** J-clips are an important part of a leak detection install. They keep cables in place, so they won't shifting or move within the facility. They also keep cables secure to the ground, minimizing tripping hazards.
- **Two types of clips to suit different leak detection** White J-clips are designed for use with SeaHawk conductive fluid sensing cable, non-sensing cable, and spot detectors. Black J-clips are corrosion resistant nylon with a heavy-duty adhesive backing and are intended for use with chemical sensing cable.

04

KEEP CABLES STATIONARY AND SECURE: J-clips keep cable from moving and shifting in any leak detection installation.

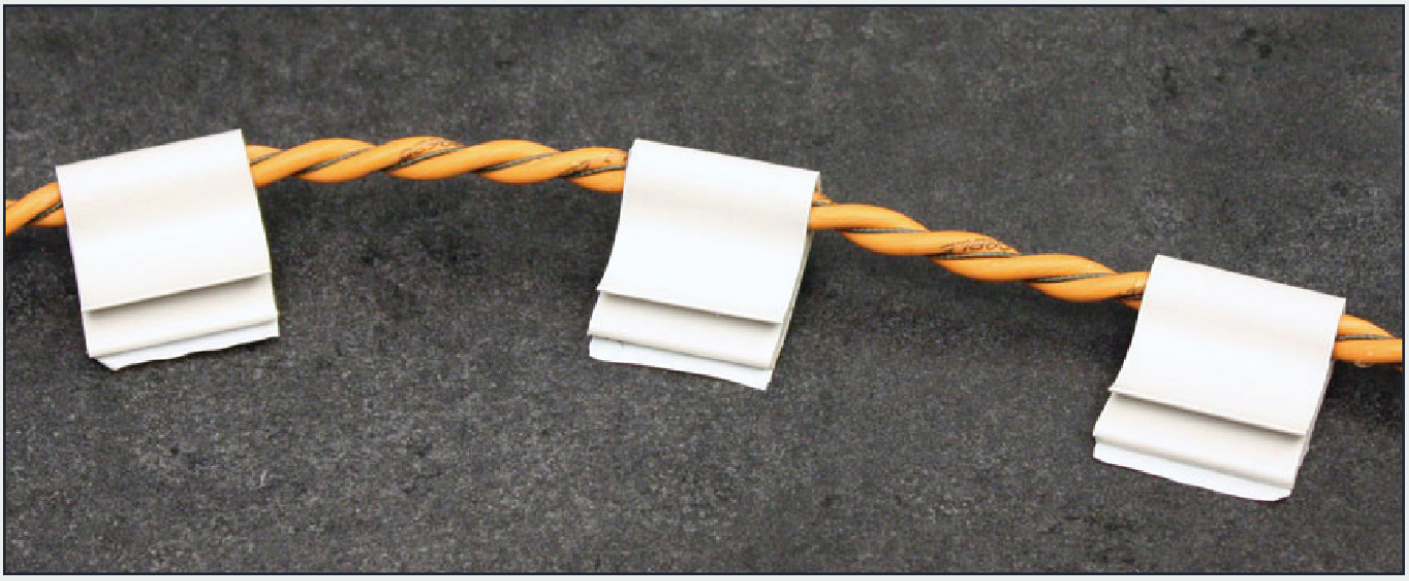


05

JC: Compatible with all RLE SeaHawk sensing cables & NSC. JC-C are compatible with SC-C.

Product Codes	
JC-10	J-clips; qty 10; for use with SC, SC-ZH, and NSC
JC-25	J-clips; qty 25; for use with SC, SC-ZH, and NSC
JC-50	J-clips; qty 50; for use with SC, SC-ZH, and NSC
JC-200	J-clips; qty 200; for use with SC, SC-ZH, and NSC
JC-C-10	J-clips; qty 10; for use with SC-C
JC-C-25	J-clips; qty 25; for use with SC-C
JC-C-50	J-clips; qty 50; for use with SC-C
JC-C-200	J-clips; qty 200; for use with SC-C

05

JC

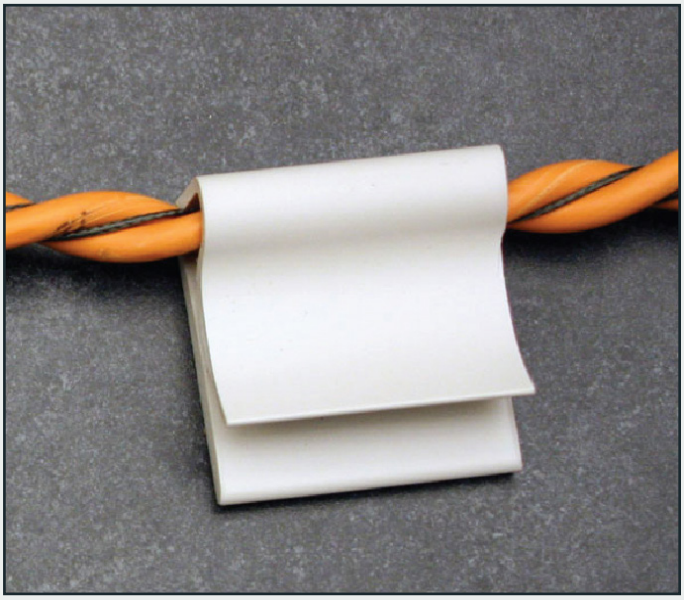

JC-C



06

JC Technical Specifications	
Material	>180 lbs. (>81.65kg)
Operating Environment (Adhesive Tape Temperature)	-4° to 122°F (-20° to 50°C)
Dimensions	1”W x 1.1”H x 0.5”D (25mmW x 28mmH x 12mmD)

JC-C Technical Specifications	
Material	>180 lbs. (>81.65kg)
Operating Environment (Adhesive Tape Temperature)	-31° to 200°F (-35° to 93°C)
Dimensions	1”W x 1.1”H x 0.5”D (25mmW x 28mmH x 12mmD)