


AC POWER SUPPLY

PSH300A

300 VA Power Supply, Three 100 VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac, Metal Enclosure

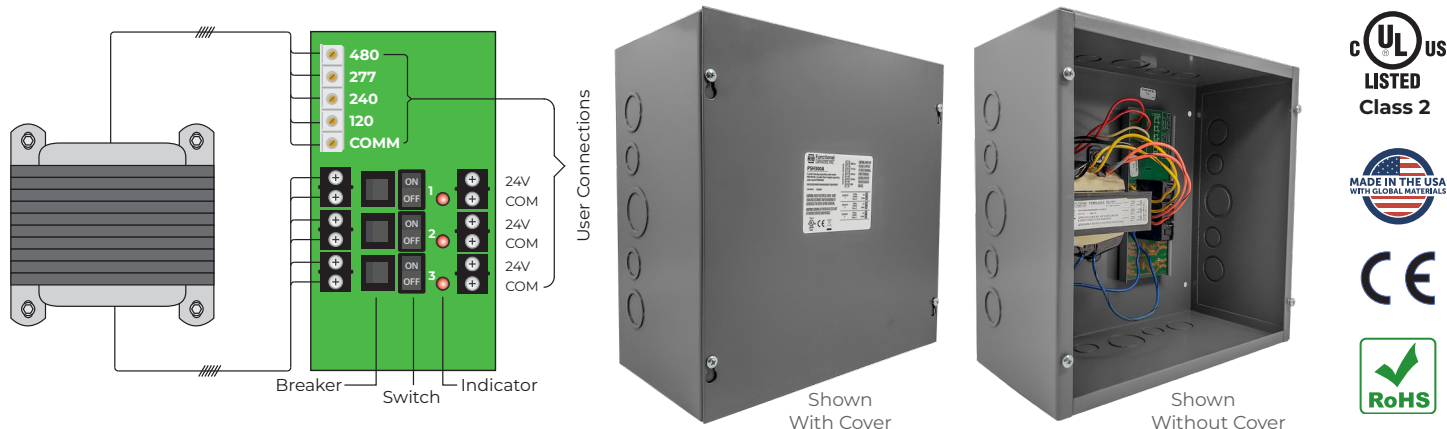

SPECIFICATIONS

Transformer	One (1) 300 VA	Standby Wattage	16.61 W @ 120 Vac 17.70 W @ 240 Vac 16.26 W @ 277 Vac 19.20 W @ 480 Vac
Over Current Protection	Circuit Breaker	Full Load Primary Current	2.66 A @ 120 Vac 1.36 A @ 240 Vac 1.18 A @ 277 Vac 0.68 A @ 480 Vac
Primary	480/277/240/120 Vac	Secondary Output Voltage vs. Load	24.5 V @ 1 Amp 23.5 V @ 2 Amp 22.8 V @ 3 Amp 22.3 V @ 4 Amp
Frequency	50/60 Hz	Housing	NEMA 1 Metal Enclosure
24 Vac ON/OFF	On / Off Switch & Breaker	Origin	Made of US and non-US parts
5 Secondaries	24 Vac, with LED Indicators		
Input	480/277/240/120 Vac Finger-Safe Terminals , 8-18 AWG		
Output	3 Ungrounded, Isolated, 100 VA, Class 2, 24 Vac Outputs. Terminals accept 12-26 AWG wire.		
Ambient Temperature Derating	4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C (When All 3 Outputs Operated Simultaneously) · With 120 Vac primary input voltage · When all 3 outputs operated simultaneously, at room temperature		
Dimensions	12.125" H x 12.125" W x 6.000" D		
Approvals	Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special ^ Seismic Certification of Equipment and Components: OSP-0201-10		

NOTES

Primary voltage terminal cover available
To order OSP labeled, add "-OSP" to end of model number