

Workman® FP Stryder™ Anchorage Connector



2 models available to fit most beam sizes


- Standard version fits beam flange widths from 4" to 13.5"
- XL version fits beam flange widths from 14" to 23.5"



FEATURES

- Low-friction wear pads with Teflon® eliminate metal-to-metal contact and allow the FP Stryder Anchorage Connector to glide effortlessly along the beam flange
- Integral load indicator alerts user if the unit has been exposed to a fall
- Versatile design allows for mounting overhead or at worker's feet
- Vernier adjustability allows for a secure fit and ¼" adjustment intervals
- Easy to use lever-locking adjustment—No pins to lose!
- 400-pound working capacity
- Durable aluminum alloy crossbar on standard version and alloy steel on XL version
- Meets ANSI Z359.1 and all applicable OSHA standards

*Because every life has a **purpose**...*

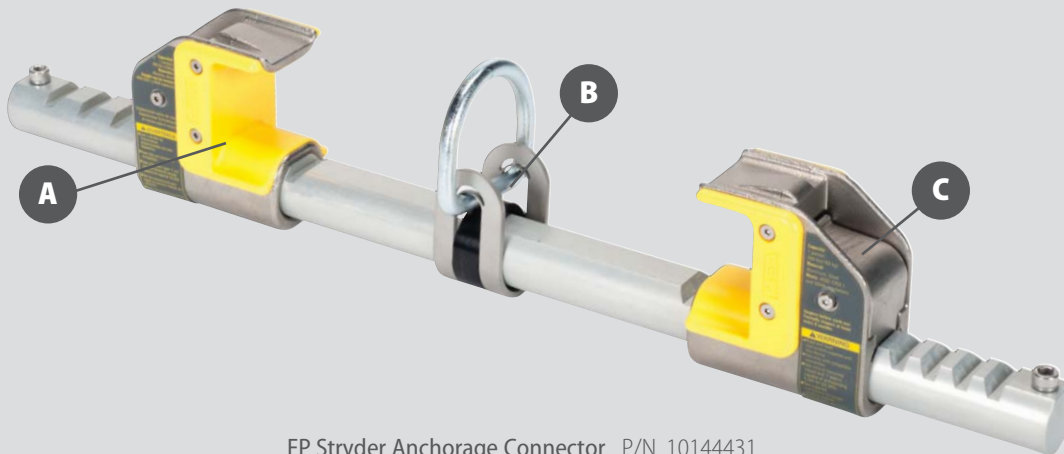

FP Stryder Anchorage Connector P/N. 10144431



(A) Beam glide



(B) Load indicator



(C) Push button adjustment

ORDERING INFORMATION

P/N	Description
10144431	FP Stryder Anchorage Connector, Standard version, fits beam flange widths from 4" - 13.5"
10144432	FP Stryder XL Anchorage Connector, XL version, fits beam flange widths from 14" - 23.5"

PRODUCT SPECIFICATION

MAXIMUM WORKING LOAD	400 lbs	CERTIFICATION	This product meets or exceeds the following standards: OSHA ANSI: Z359.1
MINIMUM BREAKING STRENGTH	5,000 lbs		
WEIGHT	5.3 lbs		

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



MSA Corporate Center
1000 Cranberry Woods Drive
Cranberry Township, PA 16066
USA
Phone 724-776-8600
www.MSAsafety.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 1-800-MSA-INST
Fax 1-800-967-0398

MSA Mexico
Phone 01 800 672 7222
Fax 52-44 2227 3943

MSA International
Phone 724-776-8626
Toll Free 1-800-672-7777
FAX 724-741-1559



ID 2300-68-MC / Feb 2013

© MSA 2013 Printed in U.S.A.

www.MSAsafety.com