




FM2958
0425
Supersedes
NEW

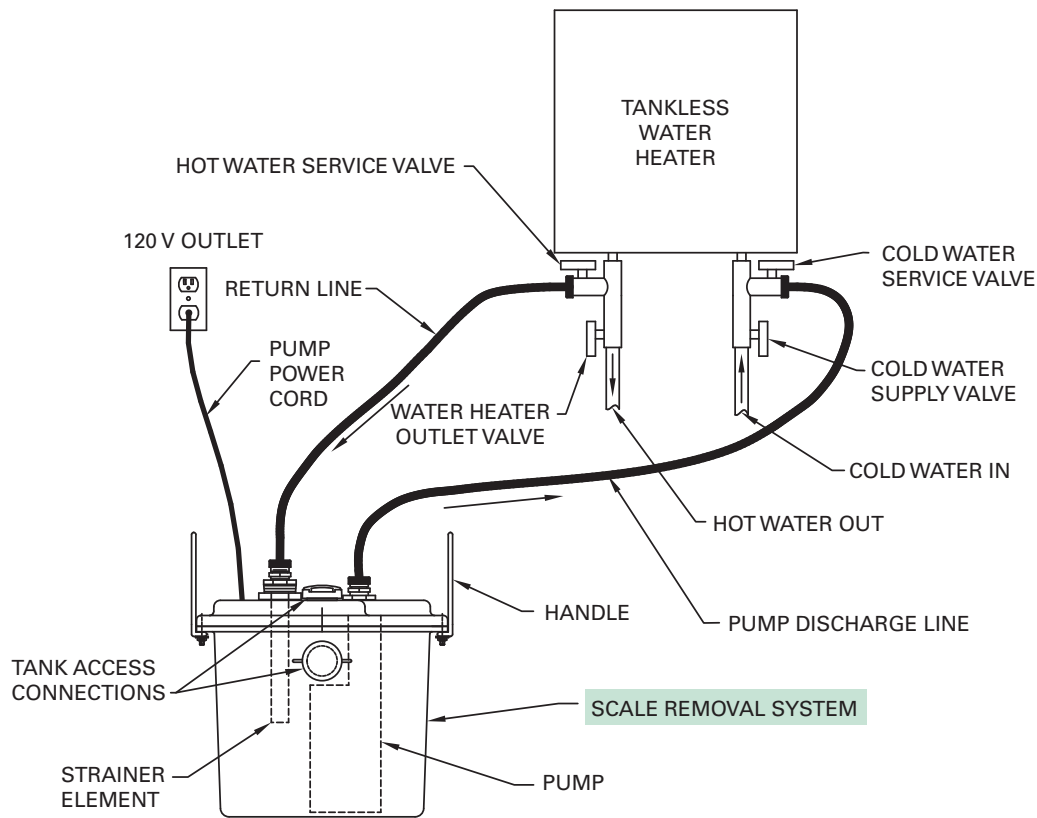

SK2793

109 Series Features:

- Preassembled - includes hoses, tank, pump, and fittings
- Internal reusable filter sock
- Meets flushing requirements for tankless water heating systems
- Tank & lid - 5 gallon (23 L) polyethylene tank with stainless steel hardware
- 3/4" stainless steel braided lines
- Product covered by US Patent Number 9,228,575

Product Specifications

MOTOR	Horse Power	1/6
	Voltage	115
	Phase	1 Ph
	Hertz	60
	RPM	3450
	Amps	1.5
PUMP	Operation	Nonautomatic
	Cord Length	8' (2 m)
	Max. Head	19' (5.8 m)
	Max. Flow Rate	3 GPM (13.6 LPM)*
	Max. Operating Temp.	104° F (40 C°)
	Cooling	Oil free
MATERIALS	Motor Housing	Engineered plastic
	Pump Housing	Engineered plastic
	Upper Bearing	Ball bearing
	Lower Bearing	Ball bearing
	Mechanical Seals	Carbon and ceramic
	Impeller Type	Non-clogging vortex
	Impeller	Engineered plastic
	Hardware	Stainless steel
	Motor Shaft	416 stainless steel
	Gasket	NBR

100% FACTORY TESTED



All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).