


# 3M™ Industrial Sealing Tape IS1

When it comes to industrial sealing solutions, 3M™ Industrial Sealing Tape IS1 offers an alternative to traditional messy sealants. Designed for efficiency and reliability, this tape provides a consistent, easy-to-apply solution that ensures a robust water and vapor barrier. Whether you're dealing with joints, rivet areas, or tight spaces, our tape is engineered to meet your sealing needs with precision and ease.

---

## Creates a Water and Vapor Barrier

Helps protect from water leakage at joints and rivet areas.

## Aggressive Adhesive

Can be applied at low temperatures with minimal surface preparation.

## Thin, Flexible Backing


Can fit into tight spaces between panels and frames.



# Find the Right Fit


## 3M™ Industrial Sealing Tape IS1

- Rivet, Screw and Nail seal ability
- Thin, flexible backing
- Aggressive adhesive
- Great for sealing between surfaces

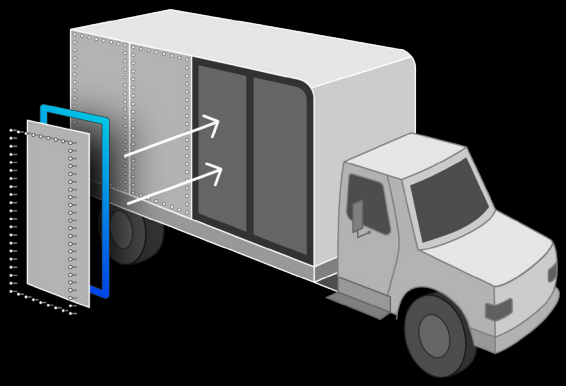

## 3M™ Extreme Sealing Tape 4410+, 4411+, 4412+

- Long term UV resistance
- Variety of thicknesses
- Made to seal over screw heads, rivets, joints and splices
- Great for sealing on roof tops

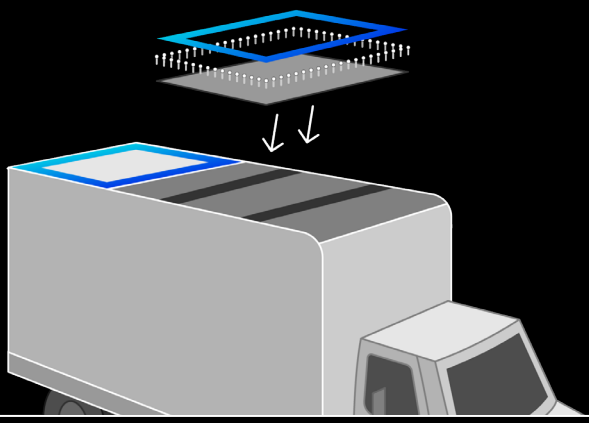

| Product | 3M Material ID | Width (in/mm) | Length (yd/m) | Rolls/Case |
|---|---|---|---|---|
| **3M™ Industrial Sealing Tape IS1,** White | 7100377318 | 2 in | 36 yd | 24 |
| | 7100376842 | 4 in | 36 yd | 12 |
| | 7100377266 | 60 in | 36 yd | 1 |

## Specifications

**Total Thickness**
10 mil (.25 mm)

**Adhesion to Steel**
52 oz/in (57 N/cm)

**Tensile Strength**
22 lb/in (385 N/cm)

**Elongation at Break**
>700%

## Take on Weather

You need a 3M™ Engineered Industrial Tape that provides a conformable, rugged and weatherproof seal.

**3M Industrial Adhesives and Tapes Division**
3M Center, Building 223
St. Paul, MN 55144-1000 USA

**Phone** 800-362-3550

**Fax** 877-369-2923

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for proper evaluation (including, but not limited to, fitness for purpose and suitability of application), selection, and use of 3M products. Safety products should always be selected and used in accordance with all applicable regulations and standards (e.g., OSHA, ANSI, and others), after conducting a proper hazard assessment. Failure to properly evaluate, select, and use a 3M product may result in injury, sickness, death, and/or harm to property. Dispose of used atomizing hacks, residual paint/coatings, used containers/materials, and PPS in accordance with local regulations.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity). regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M is a trademark of 3M Company. Please recycle. Printed in USA.
© 3M 2025. All rights reserved.

**Visit 3M.com/EngineeredTapes to find your solution today.**