


Ram Board Edge Tape® 90-Day



Edge Tape 90-Day is a single sided tape made with a laminated polyethylene cloth and proprietary acrylic adhesive. This tape offers superior physical properties and easy handling compared with conventional masking, protection and repair tapes. 90-Day Edge Tape allows up to a 90-day* application with no residue left behind.

Available sizes:

2" x 164' (50.8 mm x 50m)

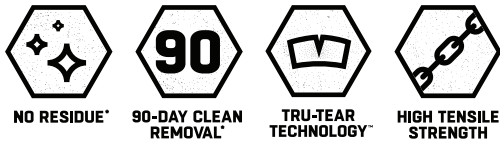

FEATURES:

- Residue free removal even after 90 days*
- Easy to tear by hands straight: No cutting tool required
- Scrap-less: face to face contact of adhesive separates without damaging the adhesive
- Repositionable with no wrinkles
- Waterproof
- Wide application temperature range
- High dimension stability
- High chemical and solvent resistance
- High abrasion resistance
- ASTM E 84 (UL 723): Class 1, Flame Spread Index 5, Smoke Developed Index 0

TYPICAL PROPERTIES:

Property	Value	Test Method
Thickness:	6.3 mil	PSTC-133
Breaking Strength:	34 lbf/in	PSTC-131
Peel Adhesion:	36 oz/in	PSTC-101
Elongation:	15%	PSTC-131

FURTHER TECHNICAL INFORMATION:

- Store Edge Tape away from direct sunlight and in a cool, dry area
- For optimum performance, Edge Tape should be used within 12 months of date of shipment
- Edge Tape may leave residue on some natural stones or change in quality of surfaces
- Test on a small area before use
- Ideal application temperature range is between 40°F and 200°F
- Edge Tape may leave a residue on some natural stones or change in quality of surfaces
- Edge tape may peel off surfaces of delicate materials of old coatings
- In the case of residue, an effective remover is 91% IPA (isopropyl alcohol) available in most pharmacies

***WARNING:** 90-day Edge Tape™ is designed to tape jobsite protection to the floor. Remove within 90 days of application. Use only on clean, dry surfaces. Test on a small area before use. Exterior use and use on metal surfaces is recommended up to 30 days. Do NOT use as an electrical insulation tape. Not recommended for use on painted drywall or onsite finished hardwood floors. Do NOT use on delicate surfaces, such as unpainted or painted drywall, wall paper, natural stone, faux finishes, lacquer or surfaces with a tendency to peel. Clean removal feature depends on the adherent material, jobsite conditions and surface conditions. Some additives in PVC may soften adhesive layer over time. This may cause adhesive residue. If the product is defective your option will be limited. In no event will Ram Board's aggregate liability exceed the amount paid for this product. Liability limited to replacement of tape or refund at Ram Board's Discretion. Made in Japan. Distributed by Ram Board, Inc.® | Tinley Park, IL 60487

The information in this document was obtained from sources which we believe reliable. The information is provided without any warranty expressed or implied regarding its correctness. We do not assume responsibility for loss, damage or expense in any way connected with the handling, storage, use or disposal of the product. © 2021 Ram Board, Inc. Product names & attributes trademark of Ram Board, Inc. where applicable.