

TECHNICAL SPECIFICATIONS



SPLIT SYSTEM HEAT PUMPS

Conforms to UL Standard 1995. Certified to CAN/CSA Standard C22.2 No.236.




Environmentally Responsible

Continental Heat Pumps are made with the environmentally conscious, chlorine-free refrigerant R-410A. By using a refrigerant that is chlorine-free, Continental Heat Pumps do not contribute to ozone depletion.

FEATURES & BENEFITS

- 15 SEER / 8.5 HSPF
- Capacities ranging from 2.0 tons to 4.0 tons
- Environmentally friendly R-410A refrigerant
- High Efficiency Copeland Scroll Compressors
- Fin and Tube Condenser
- Swept Fan Blades
- Permanently lubricated PSC motor
- Motor assembly is removable from top of unit
- Service valves and refrigerant connections are located outside the cabinet for easy accessibility and servicing
- Electrical connections are accessible through a removable service panel

NOMENCLATURE

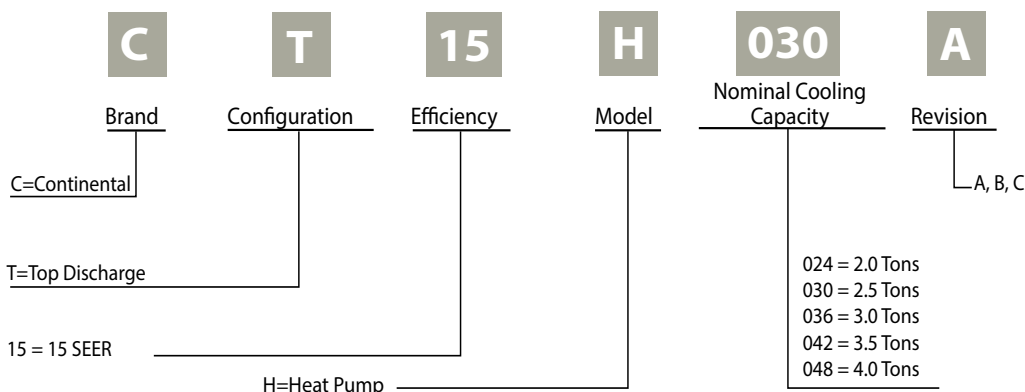

COMPONENTS

1. SIDE PANELS

- Vertical extruded slots on the side panels protect the interior of Continental Heat Pump while allowing the right amount of air flow
- Powder coated cabinet panels withstanding 1000 hours of salt spray testing

2. VENTURI

- Integral to the housing, a deep venturi is used in conjunction with the swept fan blade to provide more efficient air flow

3. SWEPT FAN BLADES

- Contoured blades provide quieter operation
- Produces efficient air flow
- Fans are made up of 4 or 2 fan blades to accommodate the unit cooling capacity

4. SCROLL COMPRESSOR


- Industry leading compressor brand
- Low vibration and quiet operation
- Contains built-in safety features



CT15H SPECIFICATIONS

DIMENSIONS

NOM SIZE	MODEL	W (inch)	D (inch)	H (inch)	Weight (lb)
2.0 Tons	CT15H024A	24	24	27	160
2.5 Tons	CT15H030A	29 1/2	29 1/2	27	200
3.0 Tons	CT15H036A	29 1/2	29 1/2	38 7/8	230
3.5 Tons	CT15H042A	29 1/2	29 1/2	47 7/8	280
4.0 Tons	CT15H048A	29 1/2	29 1/2	47 7/8	280

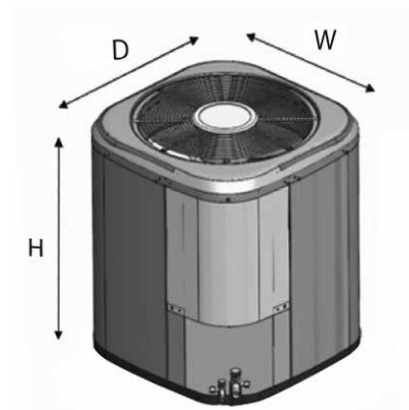

ELECTRICAL

DESCRIPTION	2.0 Tons	2.5 Tons	3.0 Tons	3.5 Tons	4.0 Tons
Compressor Type	Scroll	Scroll	Scroll	Scroll	Scroll
Ref Charge (oz) 410A	120	149	145	268	266
Volt –Hz –Phase	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1
Compressor LRA (A)	62.9	67.8	72.2	109.0	123.9
Compressor RLA (A)	10.9	12.8	14.1	16.7	17.0
Fan Blade Dia. / qty blades	18" / 4	24" / 2	24" / 2	24" / 2	24" / 2
Condenser Fan FLA / HP / RPM rated	0.7 / 1/8 / 1075	0.8 / 1/6 / 850	0.8 / 1/6 / 850	0.8 / 1/6 / 850	0.8 / 1/6 / 850
MCA	14.3	16.8	18.4	21.7	22.4
Max. Fuse/Breaker (A)	25	25	30	35	35

LINE SET

LINE SIZES	2.0 Tons	2.5 Tons	3.0 Tons	3.5 Tons	4.0 Tons
Liquid Line	3/8 "	3/8 "	3/8 "	3/8 "	3/8 "
Suction Line	3/4 "	3/4 "	3/4 "	7/8 "	7/8 "

PERFORMANCE

NOM SIZE	MODEL	Cooling Capacity Btu/h	SEER	Heating Capacity Btu/h	HSPF	SCFM Indoor Air Coil	Ref.
2.0 Tons	CT15H024A	23200	15	20600	8.5	820	410A
2.5 Tons	CT15H030A	28000	15	26800	9	1050	410A
3.0 Tons	CT15H036A	32000	15	32000	9	1200	410A
3.5 Tons	CT15H042A	37400	15	38000	9	1280	410A
4.0 Tons	CT15H048A	43000	15	41500	9	1470	410A

NOTE

ALL CONTINENTAL HEAT PUMPS SHALL BE INSTALLED WITH PROPERLY MATCHED SYSTEM COMPONENTS LISTED ON AHRI DIRECTORY.



WOLF STEEL

24 Napoleon Road, Barrie, Ontario, Canada L4M 0G8

Wolf Steel LTD., 24 Napoleon Rd., Barrie, ON

L4M 0G8 Canada. Phone 866-820-8686

www.continentalcomfort.com



Intertek
9700539

ENERGUIDE



Quality System Certified To
ISO
9001-2015