

TECHNICAL SPECIFICATIONS



ULTIMATE HIGH WALL HEAT PUMP SERIES



FEATURES

- Very High Efficiency Rating**
 Delivers exceptional energy savings and performance, reducing utility costs.
- Available Capacities**
 Choose from 6,000 BTU/h, 9,000 BTU/h, 12,000 BTU/h, 18,000 BTU/h, 24,000 BTU/h, and 33,000 BTU/h to meet a variety of heating and cooling needs.
- Wide Operating Range**
 Performs efficiently in extreme temperatures, from -30°C (-22°F) to 50°C (122°F).
- Energy Star & NEEP Certified**
 Recognized for superior energy efficiency, qualifying for potential rebates and contributing to a greener environment. Eligibility for local rebate programs offers additional cost savings—check local Qualified Product Lists for details.
- Intelligent Eye Technology**
 Automatically adjusts settings to optimize comfort while saving energy when the room is unoccupied.
- Efficient, Contemporary Indoor Units**
 Sleek, modern design that complements any interior while delivering top performance with auto restart and louver position memory.
- Wi-Fi Kit Included**
 Enables remote control and monitoring for added convenience and flexibility, allowing management from anywhere.
- User-Friendly Remote Control**
 Elegant design with easy access to Sleep Mode, LED light control, room temperature settings, on/off, and a “Follow Me” feature for personalized comfort.

ENVIRONMENTALLY RESPONSIBLE

Napoleon uses R-454B refrigerant, which offers improved energy efficiency and reduces greenhouse gas (GHG) emissions. This refrigerant has a significantly lower Global Warming Potential (GWP), no ozone depletion potential (ODP), and low toxicity. R-454B's GWP is over 75% lower than its predecessor, R-410A, and it exceeds EPA requirements for low-GWP refrigerants (<700 GWP).

NOMENCLATURE

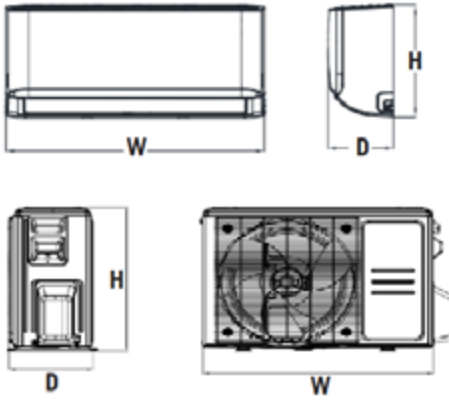
ULTIMATE HIGH WALL HEAT PUMP SERIES



N	D	H	A	S	26	B	A	-	24	-	I
Brand	Configuration	Type (Heat Pump/ or Cool Only)	Sales Channel	Single/Multi	Efficiency	Refrigerant	Revision		Capacity in 000 BTU/h		Indoor/ Outdoor
N = Napoleon	Ductless	Heat Pump	Distribution	Single	26 = 26 SEER2	B = R454B	A = Without Leak Sensor B = With Leak Sensor/ Shut off valve		6 or 9 or 12 or 18 or 24 or 33		I = Indoor O = Outdoor

DUCTLESS SPECIFICATIONS

DIMENSIONS						
INDOOR UNIT INFORMATION	NDHAS26BB-06-I	NDHAS26BB-09-I	NDHAS26BB-12-I	NDHAS26BB-18-I	NDHAS26BB-24-I	NDHAS26BB-33-I
Width (mm/in)	848.4/33.4	848.4/33.4	848.4/33.4	1017.4/40.06	1190/46.85	1190/46.85
Depth (mm/in)	233.2/9.18	233.2/9.18	233.2/9.18	248/9.72	285/11.2	285/11.2
Height (mm/in)	300/11.76	300/11.76	300/11.76	319/12.6	371/14.59	371/14.59
Net weight (lb/kg)	22.93/10.4	23.37/10.6	22.93/10.4	27.34/12.4	43.65/19.8	43.21/19.6
Gross weight (lb/kg)	29.32/13.3	29.98/13.6	29.32/13.3	36.6/16.6	55.56/25.2	55.78/25.3
OUTDOOR UNIT INFORMATION	NDHAS26BA-06-O	NDHAS26BA-09-O	NDHAS26BA-12-O	NDHAS26BA-18-O	NDHAS26BA-24-O	NDHAS26BA-33-O
Width (mm/in)	765.0/30.12	805/31.69	805/31.69	890/35.04	946/37.24	946/37.24
Depth (mm/in)	303/11.93	330/12.99	330/12.99	342/13.46	410/16.14	410/16.14
Height (mm/in)	555/21.85	554/21.81	554/21.81	673/26.5	810/31.89	810/31.89
Net weight (lb/kg)	62.17/28.2	72.75/33	72.75/33	99.87/45.3	130.29/59.1	156.97/71.2
Gross weight (lb/kg)	67.68/30.7	78.7/35.7	78.7/35.7	107.8/48.9	141.31/64.1	167.99/76.2

[illegible]

PERFORMANCE DATA – HEATING

DB – Dry Bulb

WB – Wet Bulb

TC:Total Cooling Capacity (BTU/hr)

S/T:Sensible Cooling Capacity Ratio

PI:Power Input(kW)

Input – Total Power (kW)

HEATING PERFORMANCE AT INDOOR DRY BULB TEMPERATURE											
OUTDOOR DB(°F)	TC: Total Heating Capacity(BTU/hr)					PI: Power Input(kW)					
	Indoor Conditions(DB °F)					Indoor Conditions(DB °F)					
	60.8°F(16.0°C)	68°F(20.0°C)	70°F(21.1°C)	71.6°F(22.0°C)	75.2°F(24.0°C)	60.8°F(16.0°C)	68°F(20.0°C)	70°F(21.1°C)	71.6°F(22.0°C)	75.2°F(24.0°C)	
NDHAS26BB-06-J / NDHAS26BA-06-O	-22°F (-30.0°C)	3261	3196	3180	3167	3139	0.75	0.76	0.76	0.76	0.76
	-13°F (-25.0°C)	4213	4129	4108	4092	4055	0.81	0.81	0.81	0.82	0.82
	-4°F (-20.0°C)	5256	5151	5125	5104	5058	0.87	0.88	0.88	0.88	0.88
	5°F (-15.0°C)	8699	8525	8482	8448	8372	1.03	1.03	1.04	1.04	1.04
	17°F (-8.3°C)	8870	8693	8649	8615	8537	1.05	1.06	1.06	1.06	1.07
	35°F (1.7°C)	10760	10545	10492	10450	10356	1.25	1.26	1.26	1.26	1.27
	47°F (8.3°C)	11922	11683	11625	11578	11474	1.08	1.09	1.09	1.09	1.10
	64.4°F (18.0°C)	13573	13302	13235	13182	13064	0.86	0.86	0.87	0.87	0.87
NDHAS26BB-09-J/NDHAS26BA-09-O	-22°F (-30.0°C)	5238	5133	5107	5087	5041	1.34	1.35	1.35	1.35	1.36
	-13°F (-25.0°C)	6157	6034	6004	5980	5926	1.43	1.44	1.44	1.45	1.45
	-4°F (-20.0°C)	8287	8121	8080	8048	7976	1.57	1.59	1.59	1.59	1.60
	5°F (-15.0°C)	11961	11722	11663	11617	11512	1.69	1.71	1.71	1.71	1.72
	17°F (-8.3°C)	12402	12154	12093	12045	11937	1.60	1.62	1.62	1.62	1.63
	35°F (1.7°C)	14541	14251	14179	14123	13995	1.58	1.60	1.60	1.60	1.61
	47°F (8.3°C)	16562	16231	16149	16085	15940	1.35	1.36	1.36	1.37	1.37
	64.4°F (18.0°C)	14137	13854	13785	13730	13606	0.89	0.89	0.90	0.90	0.90
NDHAS26BB-12-J/NDHAS26BA-12-O	-22°F (-30.0°C)	6438	6310	6278	6253	6197	1.43	1.45	1.45	1.45	1.46
	-13°F (-25.0°C)	7768	7613	7575	7544	7476	1.55	1.56	1.56	1.57	1.57
	-4°F (-20.0°C)	9497	9307	9260	9223	9140	1.68	1.69	1.70	1.70	1.71
	5°F (-15.0°C)	11642	11409	11352	11306	11205	1.71	1.72	1.73	1.73	1.74
	17°F (-8.3°C)	13234	12969	12904	12852	12737	2.14	2.15	2.16	2.16	2.17
	35°F (1.7°C)	15607	15295	15218	15157	15021	2.08	2.10	2.10	2.11	2.11
	47°F (8.3°C)	16488	16158	16077	16013	15869	1.39	1.41	1.41	1.41	1.42
	64.4°F (18.0°C)	14137	13854	13785	13730	13606	0.89	0.89	0.90	0.90	0.90

HEATING PERFORMANCE AT INDOOR DRY BULB TEMPERATURE										
OUTDOOR DB(°F)	TC: Total Heating Capacity(BTU/hr)					PI: Power Input(kW)				
	Indoor Conditions(DB °F)					Indoor Conditions(DB °F)				
	60.8°F(16.0°C)	68°F(20.0°C)	70°F(21.1°C)	71.6°F(22.0°C)	75.2°F(24.0°C)	60.8°F(16.0°C)	68°F(20.0°C)	70°F(21.1°C)	71.6°F(22.0°C)	75.2°F(24.0°C)
NDHAS26BB-18-I/NDHAS26BA-18-O	-22°F (-30.0°C)	9595	9403	9356	9318	9234	1.91	1.93	1.93	1.93
	-13°F (-25.0°C)	12082	11841	11782	11735	11629	0.00	0.00	0.00	0.00
	-4°F (-20.0°C)	15435	15126	15050	14990	14855	0.00	0.00	0.00	0.00
	5°F (-15.0°C)	18626	18253	18162	18089	17927	2.16	2.17	2.18	2.18
	17°F (-8.3°C)	18475	18106	18015	17943	17782	2.49	2.51	2.51	2.52
	35°F (1.7°C)	18227	17862	17773	17702	17543	2.03	2.05	2.05	2.06
	47°F (8.3°C)	20774	20359	20257	20176	19994	1.85	1.87	1.87	1.88
	64.4°F (18.0°C)	18237	17872	17783	17711	17552	1.09	1.10	1.10	1.10
NDHAS26BB-24-I/NDHAS26BA-24-O	-22°F (-30.0°C)	13878	13600	13532	13478	13357	2.51	2.53	2.53	2.54
	-13°F (-25.0°C)	16855	16518	16436	16370	16223	2.69	2.71	2.72	2.72
	-4°F (-20.0°C)	21005	20585	20482	20400	20217	2.75	2.77	2.78	2.78
	5°F (-15.0°C)	25442	24933	24809	24709	24487	2.99	3.02	3.02	3.03
	17°F (-8.3°C)	26198	25674	25546	25443	25214	3.06	3.08	3.09	3.10
	35°F (1.7°C)	30957	30338	30186	30065	29795	3.06	3.08	3.09	3.10
	47°F (8.3°C)	30470	29861	29712	29593	29327	2.42	2.44	2.44	2.45
	64.4°F (18.0°C)	28392	27824	27685	27574	27326	1.78	1.80	1.80	1.81
NDHAS26BB-33-I/NDHAS26BA-33-O	-22°F (-30.0°C)	20344	19937	19838	19758	19580	4.30	4.34	4.35	4.36
	-13°F (-25.0°C)	24414	23926	23806	23711	23497	4.52	4.55	4.56	4.57
	-4°F (-20.0°C)	29923	29324	29178	29061	28799	4.72	4.75	4.76	4.77
	5°F (-15.0°C)	34722	34027	33857	33722	33418	5.16	5.20	5.22	5.23
	17°F (-8.3°C)	30995	30375	30223	30103	29832	4.34	4.37	4.38	4.39
	35°F (1.7°C)	34624	33931	33762	33627	33324	4.29	4.33	4.34	4.34
	47°F (8.3°C)	38805	38029	37839	37688	37349	3.93	3.96	3.97	3.98
	64.4°F (18.0°C)	28896	28318	28176	28064	27811	1.59	1.60	1.61	1.61