nVent HOFFMAN

We connect and protect

Continuous Hinge with 3-Point Latch, Type 4



SPECIFICATIONS

- 16 or 14 gauge steel
- Internal 3-point latch and padlocking POWERGLIDE Handle for quick, secure access
- Seamless foam-in-place gasket ensures a continuous seal
- 90-degree body flange opening channels away liquids
- External, welded-on mounting feet for easy installation
- Continuous hinge provides strength and ruggedness
- Removable heavy gauge stainless steel continuous hinge pin
- Seams continuously welded and ground smooth

INDUSTRY STANDARDS

UL 508A Listed; Type 4, 12, 13; File No. E61997
cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
NEMA/EEMAC Type 3, 4, 12, and 13
IEC 60529, IP66

APPLICATION

These time-tested, single-door enclosures feature nVent HOFFMAN's exclusive padlocking POWERGLIDE Handle with 3-point latching for quick and convenient access. Ideal for indoor and outdoor applications, these rigid-bodied enclosures provide superior ease-of-access without sacrificing a secure seal.

FINISH

ANSI 61 gray

ACCESSORIES

- Panels for Type 3R, 4, 4X, 12 and 13 Enclosures
- PANELITE Enclosure Lights
- Thermoelectric Coolers Indoor/Outdoor
- Touch-Up Paint
- Hol-Sealer Hole Seals

MODIFICATION AND CUSTOMIZATION

nVent HOFFMAN excels at modifying and customizing products to your specifications. Contact your local nVent HOFFMAN sales office or distributor for complete information.


BULLETIN: A4W3

STANDARD PRODUCT

Catalog Number	A × B × C in.	A × B × C mm	Body Gauge	Panel	Conductive Panel	Panel Size D × E (in.)	Panel Size D × E (mm)	Data Pocket
A16H16ALP3PT	16.00 × 16.00 × 6.00	406 × 406 × 152	16	A16P16	A16P16G	13.00 × 13.00	330 × 330	Small
A20H16ALP3PT	20.00 × 16.00 × 6.00	508 × 406 × 152	16	A20P16	A20P16G	17.00 × 13.00	432 × 330	Small
A24H24ALP3PT	24.00 × 24.00 × 6.00	610 × 610 × 152	16	A24P24	A24P24G	21.00 × 21.00	533 × 533	Small
A20H16BLP3PT	20.00 × 16.00 × 8.00	508 × 406 × 203	16	A20P16	A20P16G	17.00 × 13.00	432 × 330	Small
A20H20BLP3PT	20.00 × 20.00 × 8.00	508 × 508 × 203	16	A20P20	A20P20G	17.00 × 17.00	432 × 432	Small
A24H20BLP3PT	24.00 × 20.00 × 8.00	610 × 508 × 203	16	A24P20	A24P20G	21.00 × 17.00	533 × 432	Small
A24H24BLP3PT	24.00 × 24.00 × 8.00	610 × 610 × 203	16	A24P24	A24P24G	21.00 × 21.00	533 × 533	Small
A30H24BLP3PT	30.00 × 24.00 × 8.00	762 × 610 × 203	14	A30P24	A30P24G	27.00 × 21.00	686 × 533	Small
A30H30BLP3PT	30.00 × 30.00 × 8.00	762 × 762 × 203	14	A30P30	A30P30G	27.00 × 27.00	686 × 686	Small
A36H30BLP3PT	36.00 × 30.00 × 8.00	914 × 762 × 203	14	A36P30	A36P30G	33.00 × 27.00	838 × 686	Small

Catalog Number	A × B × C in.	A × B × C mm	Body Gauge	Panel	Conductive Panel	Panel Size D × E (in.)	Panel Size D × E (mm)	Data Pocket
A36H30CLP3PT	36.00 × 30.00 × 10.00	914 × 762 × 254	14	A36P30	A36P30G	33.00 × 27.00	838 × 686	Small
A36H30DLP3PT	36.00 × 30.00 × 12.00	914 × 762 × 305	14	A36P30	A36P30G	33.00 × 27.00	838 × 686	Small
A48H36DLP3PT	48.00 × 36.00 × 12.00	1219 × 914 × 305	14	A48P36	A48P36G	45.00 × 33.00	1143 × 838	Small
A60H36DLP3PT	60.00 × 36.00 × 12.00	1524 × 914 × 305	14	A60P36	A60P36G	57.00 × 33.00	1448 × 838	Large
A72H36DLP3PT	72.00 × 36.00 × 12.00	1829 × 914 × 305	14	A72P36	A72P36G	69.00 × 33.00	1753 × 838	Large
A48H36FLP3PT	48.00 × 36.00 × 16.00	1219 × 914 × 406	14	A48P36	A48P36G	45.00 × 33.00	1143 × 838	Small
A60H36FLP3PT	60.00 × 36.00 × 16.00	1524 × 914 × 406	14	A60P36	A60P36G	57.00 × 33.00	1448 × 838	Large
A72H36FLP3PT	72.00 × 36.00 × 16.00	1829 × 914 × 406	14	A72P36	A72P36G	69.00 × 33.00	1753 × 838	Large
A60H36GLP3PT	60.00 × 36.00 × 18.00	1524 × 914 × 457	14	A60P36	A60P36G	57.00 × 33.00	1448 × 838	Large
A72H36GLP3PT	72.00 × 36.00 × 18.00	1829 × 914 × 457	14	A72P36	A72P36G	69.00 × 33.00	1753 × 838	Large
A60H36JLP3PT	60.00 × 36.00 × 24.00	1524 × 914 × 610	14	A60P36	A60P36G	57.00 × 33.00	1448 × 838	Large
A72H36JLP3PT	72.00 × 36.00 × 24.00	1829 × 914 × 610	14	A72P36	A72P36G	69.00 × 33.00	1753 × 838	Large

Purchase panels separately.

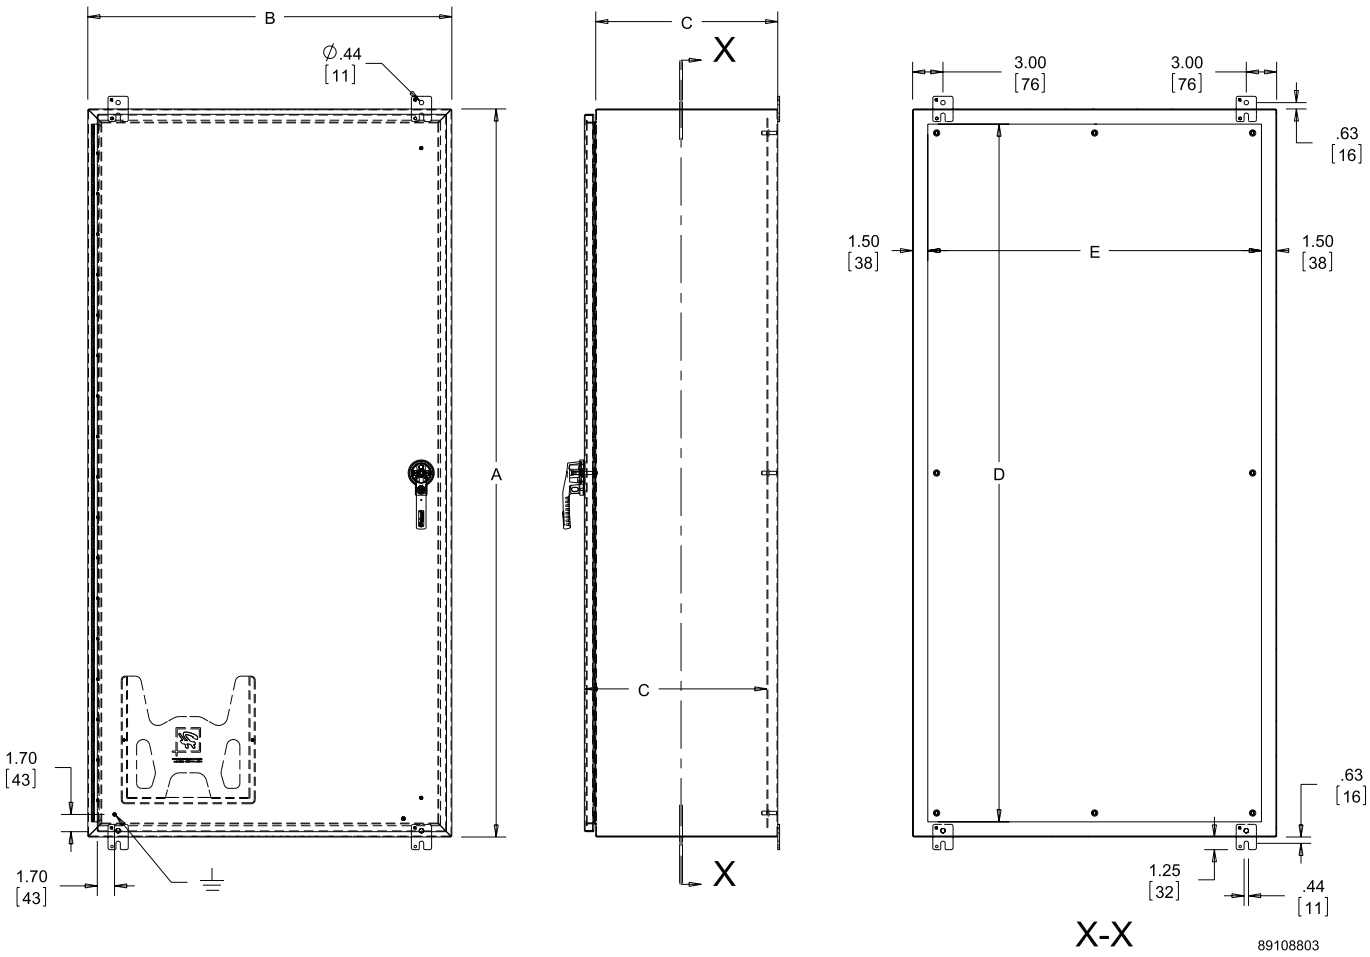

Our powerful portfolio of nVent brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE

©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.