
Saginaw Control & Engineering
95 Midland Road Saginaw, MI 48638-5770
Phone: 989/799-6871 Fax: 989/799-4524
sce@saginawcontrol.com

SCE-SAS310TM

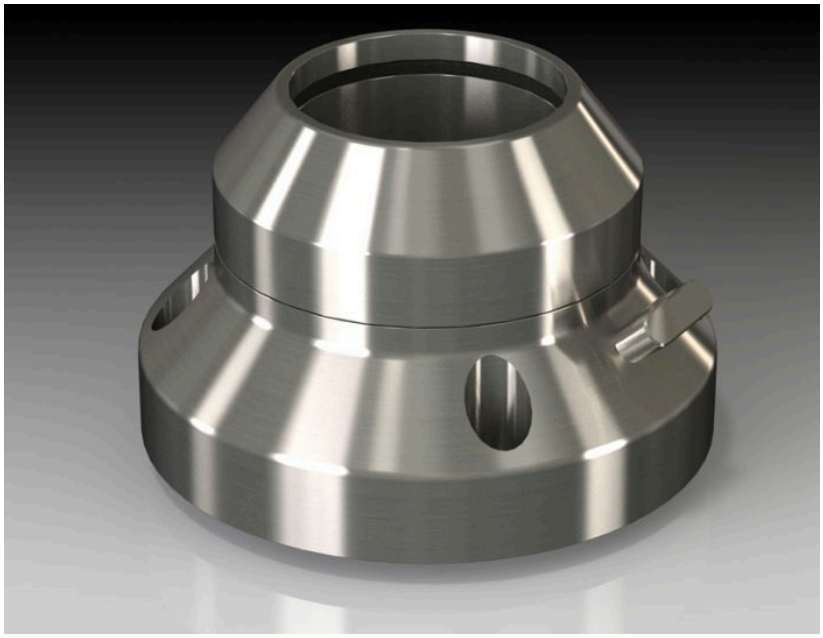

Product Specifications:

Part Number: SCE-SAS310TM

Description: S.S. Top Mounted Joint 350 Degree Rotation

Height: 3.19"

Width: 5.12"

Depth: 5.12"

Catalog Page: 430

Est. Ship Weight: 7.5 lbs

Rotation: Can be locked at any point using clamping screw.

Swivel Range: Up to 350 degree, can be adjusted in 60 degree steps

Construction

- 304 Stainless Steel couplings.
- 304 Stainless Steel tubes.
- Rotating couplings have adjustable tensioner brakes to control movement while in use
- O-Ring Gaskets at all connections maintain oil and water tight seal.
- Continuous closed tube - S, J and I shape designs.
- Closed tube acts as conduit for feeding wiring.
- Rigid, durable bearing in all rotating couplings withstand the stress of continuous use.
- Stainless Steel Hardware included for installation of coupling to tube.

Application

Designed for use with the SCE HMI enclosures, allows operators to easily move or position an HMI to an ergonomic and comfortable working position. Heavy duty and reliable construction. Suspension Systems can be assembled in a multitude of configurations that allow for machine mount, wall mount, top mount, and floor mount options. Not recommended for enclosure mounted unless adequate reinforcement is added to the Enclosure.

Finish

#4 brushed finish

Industry Standards - (IS17)

- NEMA: Not Applicable
- UL: Not Applicable
- CSA: N/A

Notes

Industry Standards
Maintains NEMA type 4, 4X and 12 and IP 66 enclosure rating when properly installed to installation instructions.

Similar Part Numbers

SCE-SAS360C S.S. Coupling 350 Degree Rotaion

Installation Information

- SAS Suspension System