Product data sheet

Specifications



NEMA motor starter, Type S, nonreversing, Size 1, 27A, 10HP at 460VAC, 5kA SCCR, 3 phase, 3 pole, melting alloy, 480VAC coil, open [TAA]

8536SCO3V06

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type	Motor starter
Product Range	S
Starter Type	Non reversing

Complementary

NEMA Size	1
Rated Current	27 A
Number of Poles	3P
Maximum Voltage Rating	600 V AC
Phase	3 phase
Type of Overload	Melting alloy 3
Horsepower Rating	7.5 HP 200 V AC 7.5 HP 230 V AC 10 HP 460 V AC 10 HP 575 V AC
SCCR	Circuit-breaker: 5 kA at 600 V AC Fuse: 5 kA at 600 V AC
Coil Voltage	440 V AC 50 Hz 480 V AC 60 Hz
Control Circuit Type	Common control circuit
Control Units	No control units
Pilot Light	Without pilot light
Auxiliary Contacts	Without
Terminal Type	Screw clamp terminals
Height	6.81 in (172.96 mm)
Width	3.50 in (88.90 mm)
Depth	4.22 in (107.19 mm)

Environment

Enclosure Type	Not rated (open device)
Certifications	UL Listed CSA NEMA

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ordering and shipping details

Category	US10CP121192
Discount Schedule	0CP1
GTIN	785901864806
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.500 in (11.430 cm)
Package 1 Width	5.900 in (14.986 cm)
Package 1 Length	8.000 in (20.320 cm)
Package weight(Lbs)	4.061 lb(US) (1.842 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	175
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	711.0002 lb(US) (322.504 kg)

Compliance

Compliance	TAA Compliant

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**4 447 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**13 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**2 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.2 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**4 429 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**3 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
SCIP Number	**04e3cbb1-2155-44d7-bcbd-499999a92721**
EU RoHS Directive	**Compliant**
REACh Regulation	**Reference contains Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**
PVC free	**Yes**


Use Again

Repack and remanufacture

Recyclability potential, in %	**73**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Dimensions Drawings

Approximate Dimensions and Clearance

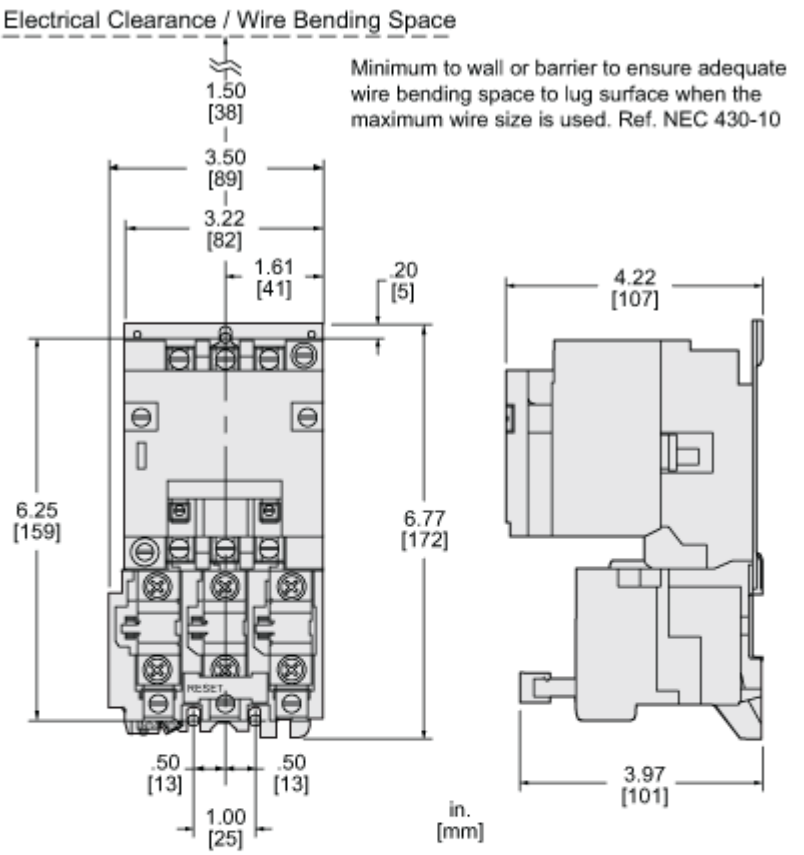

NEMA SIZE 1 STARTER
3-Pole Polyphase 600 VAC. 50-60 HZ

Coil Voltage Code (*)	Voltage	
	60 HZ	50 HZ
V01	24	—
V02	120	110
V08	208	—
V03	240	220
V06	480	440
V07	600	550
V99	Specify	Specify

Catalog Number:	8536SCO3(*)
Weight:	5 LB
Wire Size:	Power: #14-#8
	Control: #16-#12
Terminal Torque:	20 LB/IN
Mounting Hwd.	(3) #10 Screws