
Product data sheet

Specifications



Contactor, Type L, multipole lighting, electrically held, 30A, 8 pole, 600V, 110/120VAC 50/60Hz coil, open style [TAA]

8903LO80V02

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Electrically Held Lighting Contactor
Range of Product	8903L
Control Circuit	Separate control circuit

Complementary

Control Circuit Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Inrush power in VA	180 VA 60 Hz 140 VA 50 Hz
Hold-in power consumption in VA	35 VA 60 Hz 35 VA 50 Hz
Current Rating	20 A tungsten 30 A fluorescent
Number of Poles	8P 8 NO
Control Unit	No control units
Pilot Light	No indicator
Electrical Connection	Screw-clamp terminals
Height	5 in (127 mm)
Depth	3.1 in (79 mm)
Width	5.6 in (143 mm)

Environment

Enclosure Type	Not rated (open device)
Product Certifications	UL Listed CSA

Ordering and shipping details

Category	US10CP121321
Discount Schedule	0CP1
GTIN	785901851738
Returnability	Yes
Country of origin	MX

Packing Units

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	6.900 in (17.526 cm)
Package 1 Width	5.600 in (14.224 cm)
Package 1 Length	8.000 in (20.320 cm)
Package weight(Lbs)	3.671 lb(US) (1.665 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	126
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	463.000 lb(US) (210.013 kg)

Compliance

Compliance	TAA Compliant

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**588 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**13 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.2 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**571 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**2 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
Halogen content performance	**Halogen free plastic parts product**
PVC free	**Yes**

Use Again


Repack and remanufacture


Recyclability potential, in %	**90**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Image of product / Alternate images

Alternative



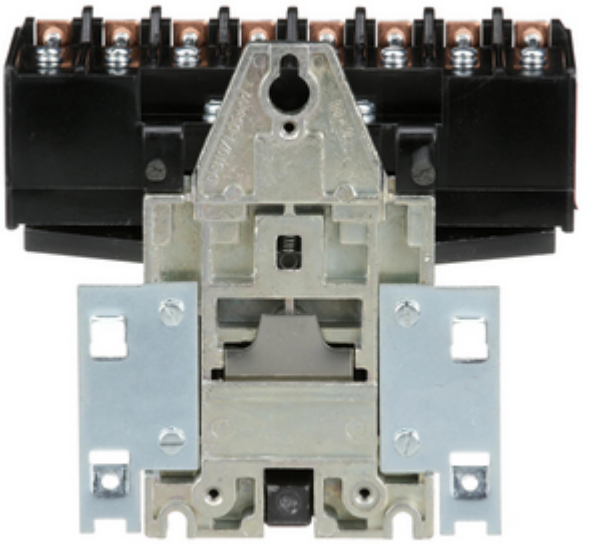

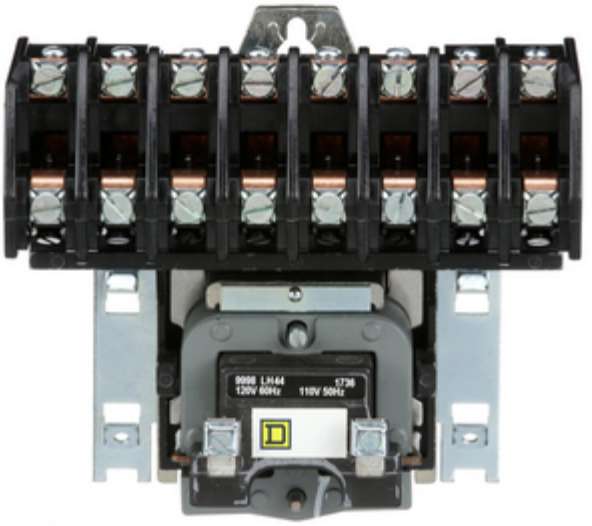
9998 LH44
120V 60Hz
1736
110V 50Hz


SQUARE D
To change any pole from N.O. to N.C., see Instruction Bulletin.
Para cambiar cualquier polo de NA a NC, consulte el boletín de instrucciones.
Pour changer tout pôle de NO à NF, consulter les directives d'utilisation.