Product data sheet

Specifications



Power distribution block, Linergy, 3 pole, 1 line, 4 load, 175A Cu, 135A Al, 600V

9080LBA362104

Discontinued on: Sep 2, 2026

Discontinued

Product availability: Stock - Normally stocked in distribution facility

Main

Range	9080LB
Product	Power Distribution Block
Current Rating	175 A copper 135 A aluminium
Short Circuit Current Rating	65 kA

Complementary

Voltage Rating	600 V AC/DC
Mounting Type	Surface mount
Number of poles	3
Terminals per Pole	1 line 4 load
Wire Size	Line 4, 14 AWG...2/0 AWG, copper or aluminium Load 2, 14 AWG...4 AWG, copper or aluminium
Electrical Connection	Tin plated aluminium lugs
SCCR	100 kA UL 508 A
Ambient Air Temperature for Operation	-40…302 °F (-40…150 °C)
Block Material	Phenolic: block
Terminal Tightening Torque	Line lug 40 lbf.in (4.5 N.m) 8 AWG copper or aluminium Line lug 35 lbf.in (4.0 N.m) 12 AWG...10 AWG copper or aluminium Line lug 35 lbf.in (4.0 N.m) 14 AWG copper Line lug 120 lbf.in (13.6 N.m) 6 AWG...2/0 AWG copper or aluminium Load lug 120 lbf.in (13.6 N.m) 14 AWG...4 AWG copper
Wire stripping length	Line: 0.5 in (12.7 mm) Load: 0.44 in (11.18 mm) for top connection Load: 0.75 in (19.05 mm) for bottom connection
Height	2.88 in (73.15 mm)
Width	1.94 in (49.28 mm)
Depth	1.78 in (45.21 mm)
End Barrier	9080LB23
Net Weight	0.49 lb(US) (0.22 kg)

Environment

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Certifications	CSA file 70361 class 6228 01 UL recognized E60616 CCN XCFR2 CE

Ordering and shipping details

Category	US1CTR121254
Discount Schedule	CTR1
GTIN	785901097457
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.900 in (4.826 cm)
Package 1 Width	2.800 in (7.112 cm)
Package 1 Length	2.800 in (7.112 cm)
Package weight(Lbs)	8.000 oz (226.796 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Height	2.200 in (5.588 cm)
Package 2 Width	5.900 in (14.986 cm)
Package 2 Length	6.000 in (15.240 cm)
Package 2 Weight	33.599 oz (952.543 g)
Unit Type of Package 3	CAR
Number of Units in Package 3	24
Package 3 Height	7.600 in (19.304 cm)
Package 3 Width	6.450 in (16.383 cm)
Package 3 Length	12.000 in (30.480 cm)
Package 3 Weight	13.0007 lb(US) (5.897 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**


Use Again

Repack and remanufacture

Circularity Profile	**No need of specific recycling operations**
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Dimensions Drawings

Approximate Dimensions

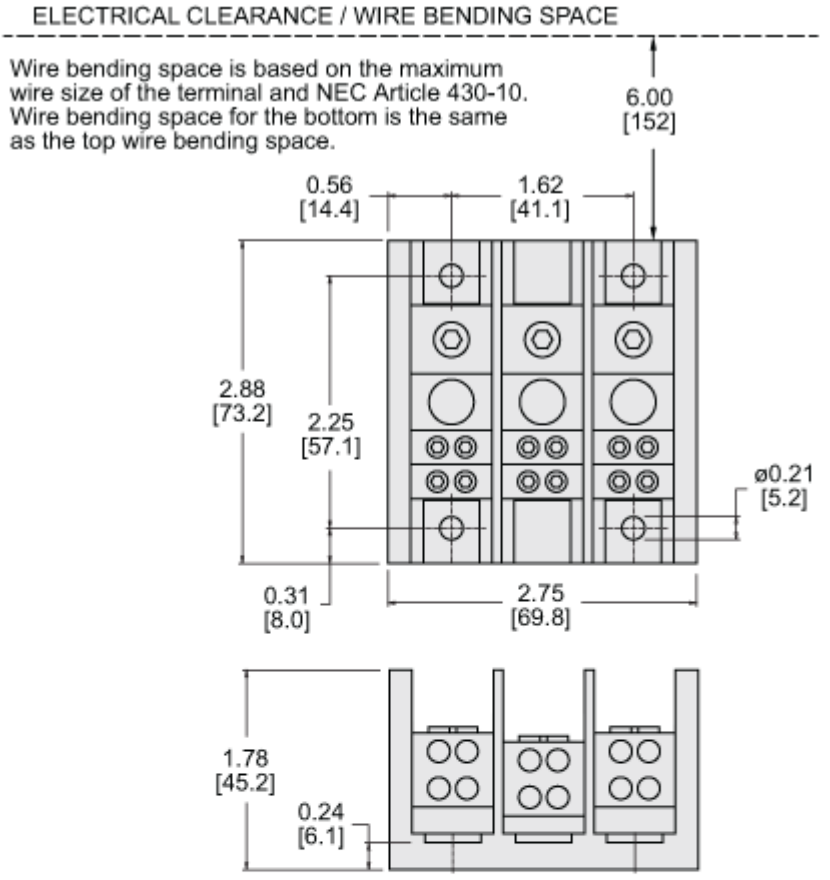

Power Distribution Block	Recommended Tightening Torque					
	Main			Branch		
	Wire Size	Torque		Wire Size	Torque	
		lb-in.	N•m		lb-in.	N•m
9080LBA362101	#6–2/0	120	13.5	#6–2/0	120	13.5
	#8	40	4.5	#8	40	4.5
	#14–#10	35	4.0	#14–#10	35	4.0
9080LBA362104	#6–2/0	120	13.5	#14–#4	35	4.0
	#8	40	4.5			
	#14–#10	35	4.0			

Power Distribution Block	Lug Wire Range **		Weight lbs. (kg)
	Main	Branch	
9080LBA362101	(1) #14–2/0	(1) #14–2/0	.31 (.20)
9080LBA362104	(1) #14–2/0	(4) #14–4	.47 (.24)

** Lugs suitable for use with 75°C conductors based on NEC Table 310-16.