Product data sheet

Specifications



discrete output module, Modicon X80, 8 NO relay outputs, 24 to 240V AC, 24 to 125V DC

BMXDRA0815

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon X80
Product or Component Type	Relay discrete output module
Discrete output logic	Positive

Complementary

Minimum switching current	1 mA 5 V DC
Response time on output	<= 10 ms activation <= 13 ms deactivation
Insulation resistance	> 10 MOhm 500 V DC
MTBF reliability	3200000 H
Protection type	External short-circuit protection External overload protection External overvoltage protection, inductive AC External overvoltage protection, inductive DC
Net Weight	0.373 lb(US) (0.169 kg)

Environment

IP Degree of Protection	IP20
Protective treatment	Standard version
Dielectric strength	1780 V AC 50/60 Hz 1 min
Relative humidity	5…95 % 140 °F (60 °C) without condensation

Ordering and shipping details

Category	US1PC3418160
Discount Schedule	PC34
GTIN	3606481275608
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.244 in (5.700 cm)
Package 1 Width	4.606 in (11.700 cm)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Length	4.606 in (11.700 cm)
Package weight(Lbs)	7.055 oz (200.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	7.317 lb(US) (3.319 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**157 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**26 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.1 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**131 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.4 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again


Repack and remanufacture

Recyclability potential, in %	**3**
Circularity Profile	End of Life Information
Take-back	**No**

Dimensions Drawings

Modules Mounted on Racks

Dimensions

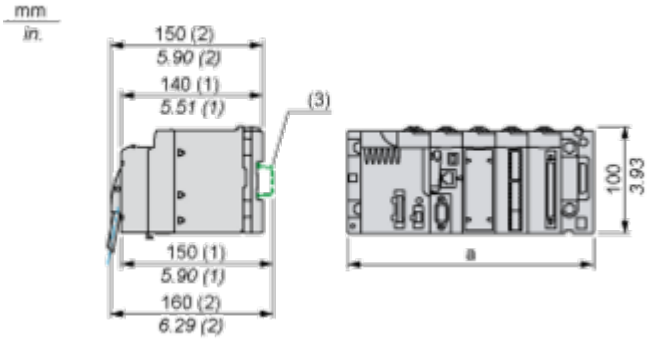


(1) With removable terminal block (cage, screw or spring).
(2) With FCN connector.
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Connections and Schema


Connecting the Module

Output Circuit Diagram

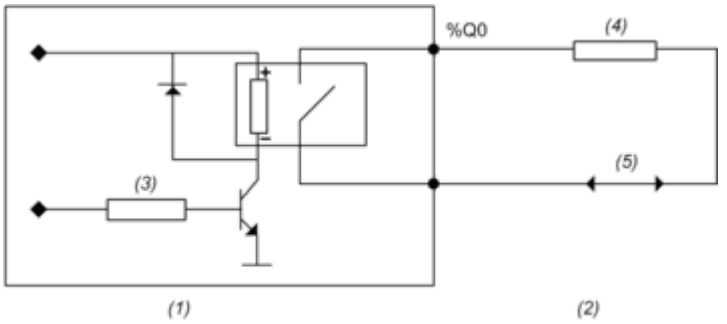

(1) Module
(2) Output
(3) Command
(4) Pre-actuator
(5) Power supply

Module Connection

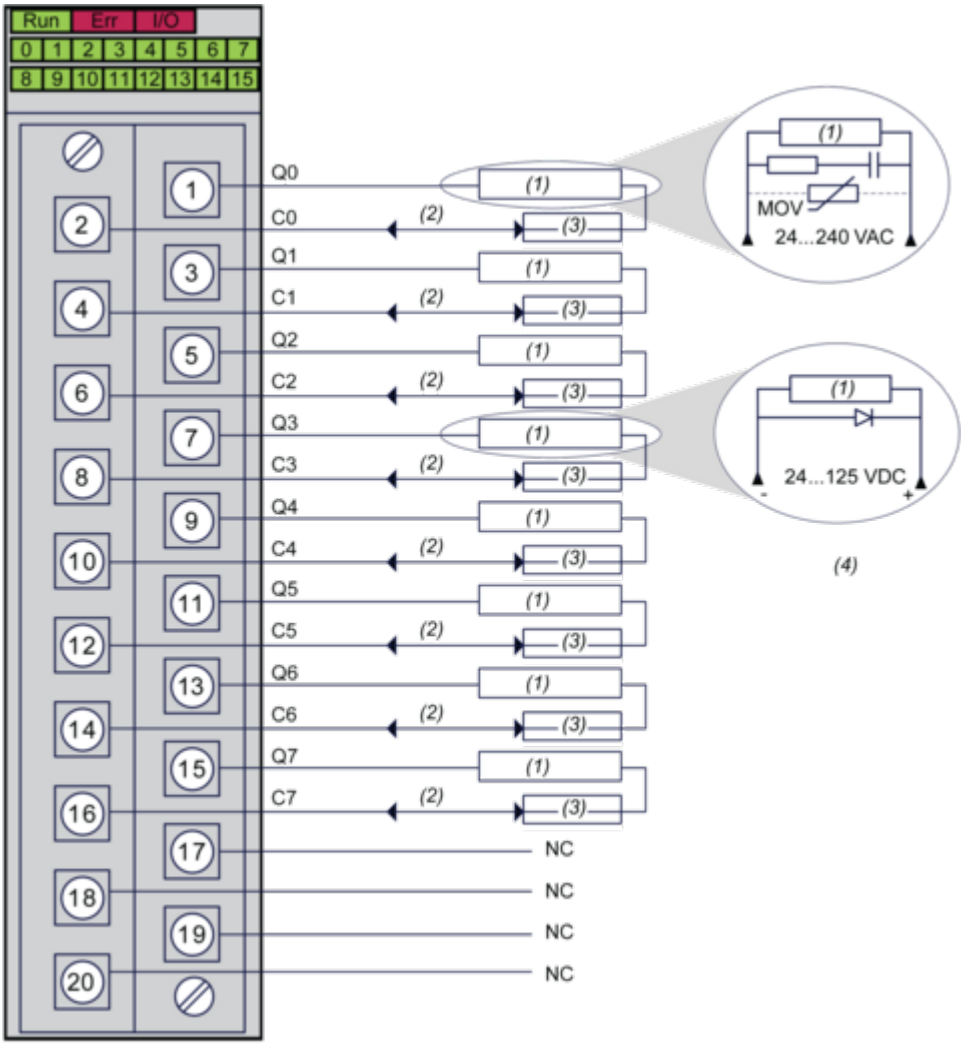

(1) Pre-actuator
(2) Power supply : 24...125 Vdc or 24...240 Vac

(3) Fuse : Use appropriate fast-blow fuse for each relay
(4) We recommend installing this type of protection on the terminals of each pre-actuator
N/C : Not connected

Image of product / Alternate images

Alternative








SN:XXXXXXXXXXX
PV:XX
RL:XX


Schneider
Electric
Modicon
BMXDRA0815
DIG 8Q 125VDC/250VAC
ISOLATED RELAYS
DOM : XXXX

