Product data sheet

Specifications



backplane expander, Modicon M340, for multirack configuration, ruggedized

BMXXBE1000H

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon M340 automation platform
Accessory / separate part category	Extension accessory
Accessory / Separate Part Type	Backplane
Accessory / separate part designation	Ruggedized backplane expander
Product Compatibility	BMXXBP1200 BMXXBP0800 BMXXBP0600 BMXXBP0400
Accessory / separate part destination	For multiracks configuration
Product Specific Application	For severe environments

Complementary

Electrical connection	2 female connectors SUB-D 9
Local signalling	1 LED green operating status (RUN) bus 1 LED red collision error (COL) rack 4 LEDs green rack adresses status
Current consumption	160 mA 24 V DC 22 mA 3.3 V DC
Module format	Standard

Environment

IP Degree of Protection	IP20
Ambient Air Temperature for Operation	-13…158 °F (-25…70 °C)
Relative Humidity	10…95 % without condensation
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive
Product certifications	CE UL CSA RCM EAC Merchant Navy ATEX zone 2/22 IECEx zone 2/22

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	IEC 61131-2 IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 and type 2 EN/IEC 61850-3, location G IEC 60079-0
Environmental characteristic	Gas resistant class Gx ISA S71.04 Gas resistant class 3C4 IEC 60721-3-3 Dust resistant class 3S4 IEC 60721-3-3 Sand resistant class 3S4 IEC 60721-3-3 Salt resistant level 2 IEC 68252 Mold growth resistant class 3B2 IEC 60721-3-3 Fungal spore resistant class 3B2 IEC 60721-3-3 Hazardous location class I division 2
Environmental characteristic	3C3 conforming to IEC 60721-3-3 3C4 conforming to IEC 60721-3-3
Protective treatment	Conformal coating

Ordering and shipping details

Category	US1PC3418160
Discount Schedule	PC34
GTIN	3595864009728
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.165 in (5.500 cm)
Package 1 Width	4.331 in (11.000 cm)
Package 1 Length	4.606 in (11.700 cm)
Package weight(Lbs)	6.349 oz (180.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	6.724 lb(US) (3.050 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**187 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**6 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**181 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.4 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant By Exemption**
REACh Regulation	**Reference contains Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again


Repack and remanufacture

Recyclability potential, in %	**26**
Circularity Profile	**End of Life Information**
Take-back	**No**

Dimensions Drawings

Modules Mounted on Racks

Dimensions

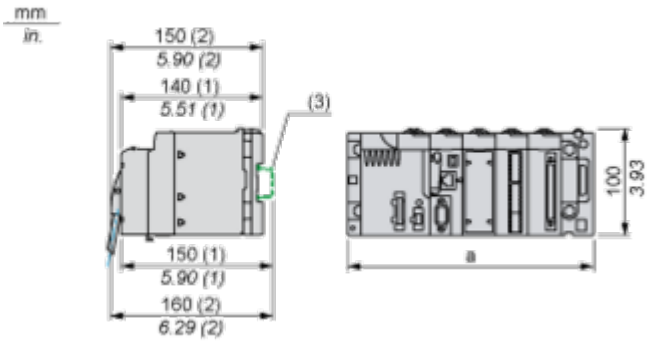


(1) With removable terminal block (cage, screw or spring).
(2) With FCN connector.
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative



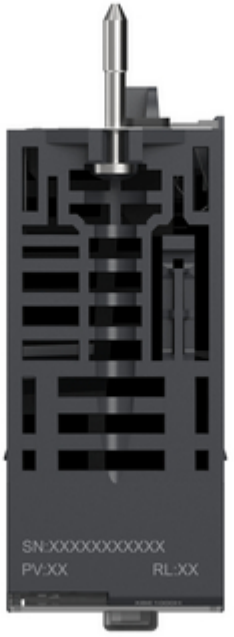


XBE1000H
RUN
COL
0
1
2
3
4
5
6
7
X Bus
X Bus




Schneider
Electric
Modicon
SW
OFF
ON
BMXXBE1000H
STANDARD BACKPLANE
EXTENDER
DOM : XXXX