Product data sheet

Specifications



Discontinued

LED bulb, Harmony XVB, BA 15d, yellow, steady light, 24V AC/DC

DL1BDB8

Discontinued on: Dec 31, 2025

End-of-service on: Jul 1, 2026

Product availability: Stock - Normally stocked in distribution facility

Main

Range Compatibility	Harmony XVP Harmony XVB Harmony XVD
Accessory / separate part designation	Protected LED bulb
Accessory / Separate Part Type	LED bulb
Accessory / separate part category	Lighting accessories
Accessory / separate part destination	Beacon and indicator bank
[Us] rated supply voltage	24 V AC/DC
Signalling type	Steady
Signalling colour	Yellow
Sale per indivisible quantity	1

Complementary

Current Consumption	47 mA
Bulb base	BA 15d
Net Weight	0.033 lb(US) (0.015 kg)

Ordering and shipping details

Category	US100XV22611
Discount Schedule	00XV
GTIN	3389110118049
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.244 in (5.700 cm)
Package 1 Width	1.772 in (4.500 cm)
Package 1 Length	1.378 in (3.500 cm)
Package weight(Lbs)	0.388 oz (11.000 g)

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Unit Type of Package 2	S01
Number of Units in Package 2	60
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	5.906 in (15.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	2.297 lb(US) (1.042 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**34 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**0.2 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**34 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant By Exemption**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**


Use Again


Repack and remanufacture


Recyclability potential, in %	**9**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Image of product / Alternate images

Alternative

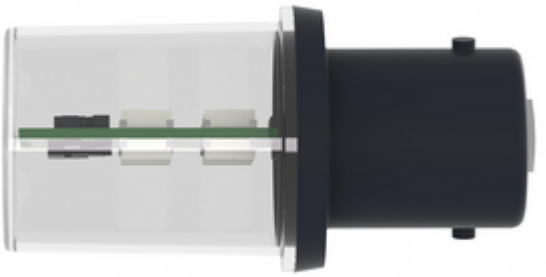

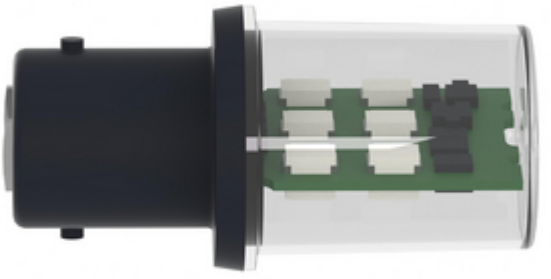


Schneider Electric
Tmax=+50°C
CE





