Product data sheet

Specifications



socket, Harmony Electromechanical Relays, for RPM4 power relays, 16A screw clamp terminals, mixed contact

RPZF4

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays
Device short name	RPZ
Product or Component Type	Socket
Product compatibility	Plug-in relay RPM 4 C/O
Contacts type and composition	4 C/O
[Ith] conventional free air thermal current	16 A
[Ue] rated operational voltage	< 250 V

Complementary

Shape of pin	Flat
Contact terminal arrangement	Mixed
Tightening torque	< 1 N.m M3.5
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	2.0 in (50 mm)
Net Weight	0.207 lb(US) (0.094 kg)

Environment

Connections - terminals	- screw clamp terminals, flexible with cable end 1 x 0.5...1 x 2.5 mm² / 20 AWG...14 AWG - screw clamp terminals, solid without cable end 1 x 0.5...1 x 1.5 mm² / 20 AWG...16 AWG - screw clamp terminals, flexible with cable end 2 x 0.5...2 x 2.5 mm² / 20 AWG...14 AWG - screw clamp terminals, solid without cable end 2 x 0.5...2 x 1.5 mm² / 20 AWG...16 AWG
IP degree of protection	IP20 conforming to IEC 60529
Dielectric strength	2500 V
Standards	IEC 61984
Product Certifications	UL CSA

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Marking	CE
Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Ambient Air Temperature for Operation	-40…131 °F (-40…55 °C)

Ordering and shipping details

Category	US10CP221128
Discount Schedule	0CP2
GTIN	3389119402316
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.181 in (3.000 cm)
Package 1 Width	1.969 in (5.000 cm)
Package 1 Length	3.346 in (8.500 cm)
Package weight(Lbs)	3.386 oz (96.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	2.520 in (6.400 cm)
Package 2 Width	3.346 in (8.500 cm)
Package 2 Length	10.000 in (25.400 cm)
Package 2 Weight	2.231 lb(US) (1.012 kg)
Unit Type of Package 3	S03
Number of Units in Package 3	110
Package 3 Height	11.8 in (30 cm)
Package 3 Width	11.8 in (30 cm)
Package 3 Length	15.7 in (40 cm)
Package 3 Weight	25.673 lb(US) (11.645 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**0.9 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**0.9 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**


Use Again

Repack and remanufacture

Recyclability potential, in %	**37**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Dimensions Drawings


Dimensions

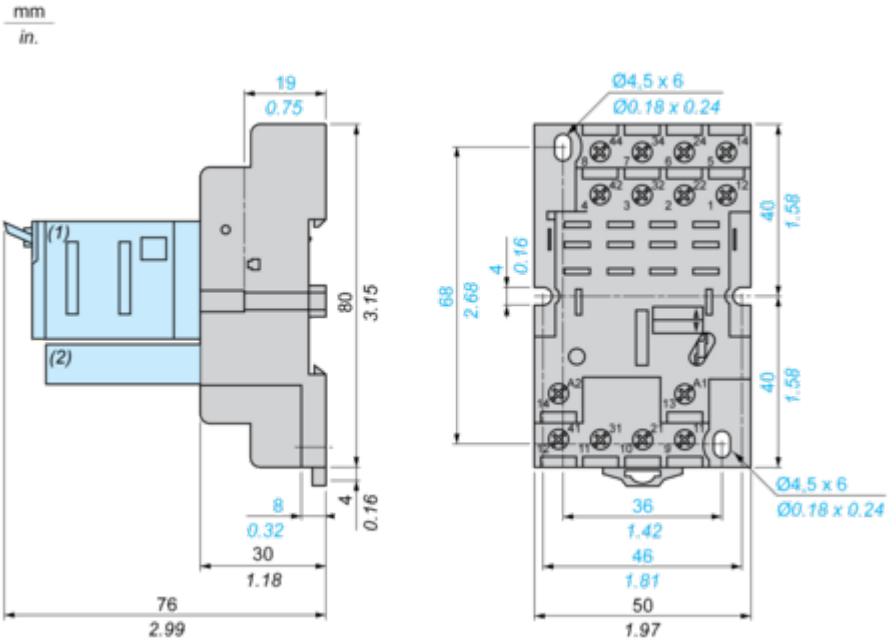

(1) Relays
(2) Protection module
(3) Maintaining clamp

Connections and Schema


Wiring Diagram

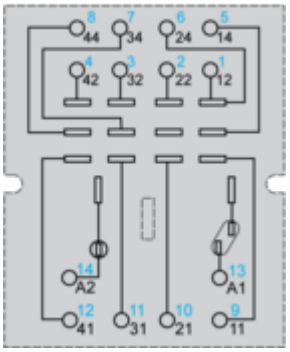


Symbols shown in blue correspond to Nema marking.

Image of product / Alternate images


Alternative

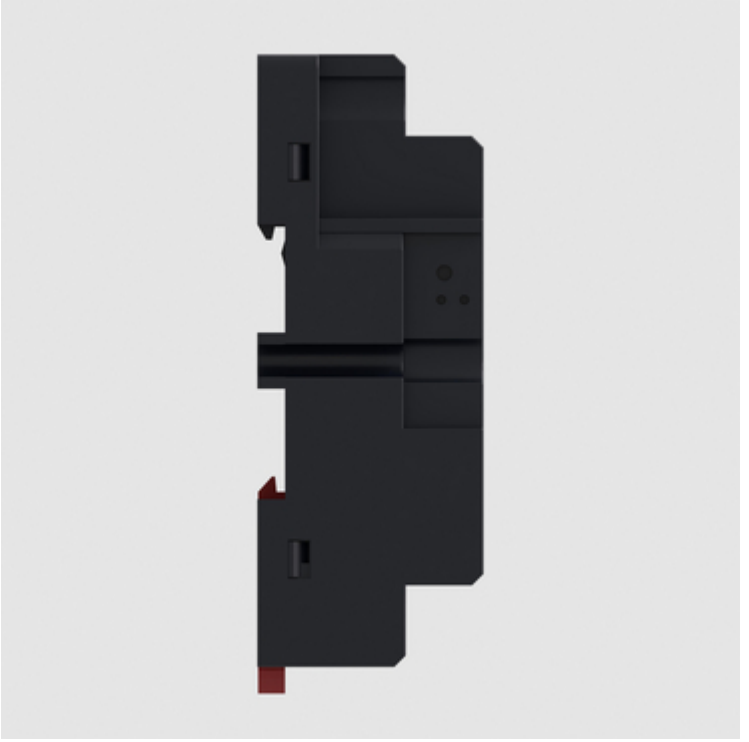



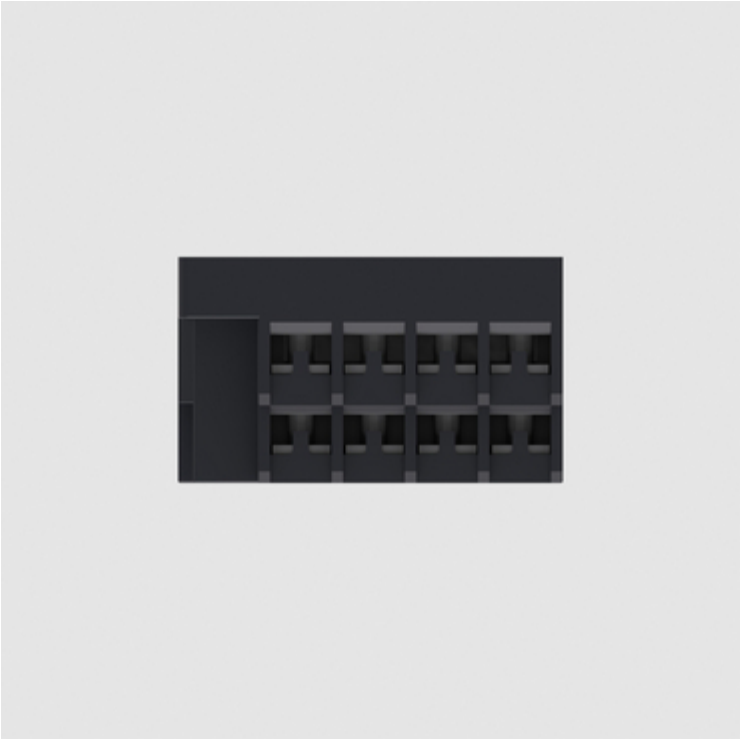



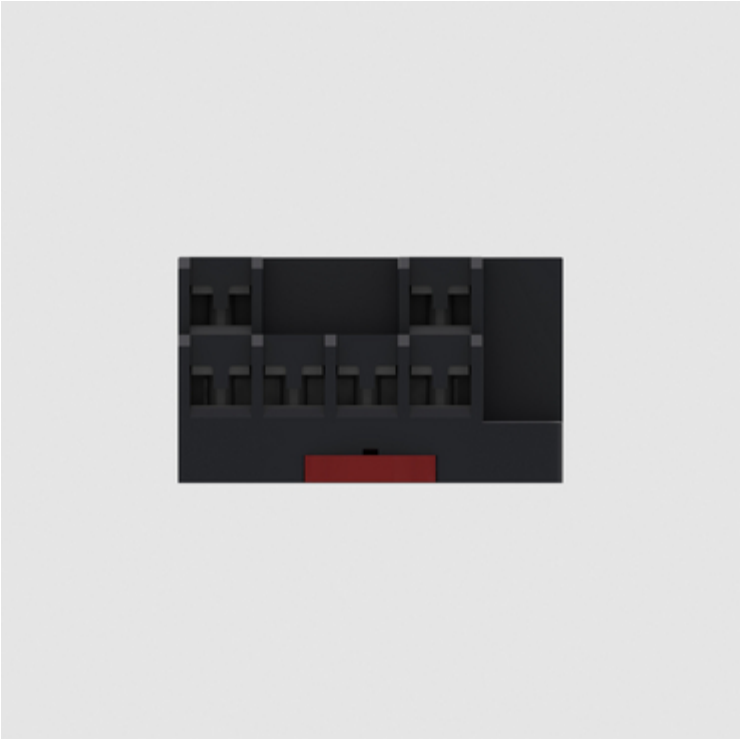


10A 300V
20A TOTAL
LOAD
Made in China
UK
CA
Schneider
Electric
RPZF4
16A 230V

Image of product in real life situation

