Product data sheet

Specifications



Harmony, plugin relay socket, mixed contact, 10 A, 250 V, screw clamp, for RXM2 or RXM4 relays

RXZE2M114

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays Harmony Timer Relays
Product compatibility	Plug-in relay RXM 2 C/O Plug-in relay RXM 4 C/O Plug-in relay REXL 2 C/O Plug-in relay REXL 4 C/O Plug-in relay 782H 4 C/O
Device short name	RXZ
[Ith] conventional free air thermal current	10 A
Product or Component Type	Socket
Contacts type and composition	4 C/O

Complementary

[Ue] rated operational voltage	< 250 V IEC < 300 V UL
Connections - terminals	Screw clamp terminals, 1 x 0.34...1 x 1 mm² 22 AWG...17 AWG) flexible with cable end Screw clamp terminals, 2 x 0.34...2 x 1 mm² 22 AWG...17 AWG) flexible with cable end Screw clamp terminals, 1 x 0.5...1 x 1.5 mm² 20 AWG...16 AWG) solid without cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm² 20 AWG...16 AWG) solid without cable end
Shape of pin	Flat
Tightening torque	< 1 N.m M3
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Wire stripping length	0.3 in (8 mm)
Contact terminal arrangement	Mixed
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	1.2 in (30 mm)
Net Weight	0.112 lb(US) (0.051 kg)

Environment

IP degree of protection	IP20 conforming to IEC 60529

Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Dielectric strength	2500 V
Standards	IEC 61984
Product Certifications	UL CSA Lloyd's
Marking	CE
Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Ambient Air Temperature for Operation	-40…131 °F (-40…55 °C)

Ordering and shipping details

Category	US10CP221128
Discount Schedule	0CP2
GTIN	3389119404242
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.024 in (2.600 cm)
Package 1 Width	1.220 in (3.100 cm)
Package 1 Length	2.756 in (7.000 cm)
Package weight(Lbs)	1.975 oz (56.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	2.992 in (7.600 cm)
Package 2 Width	3.504 in (8.900 cm)
Package 2 Length	6.102 in (15.500 cm)
Package 2 Weight	21.164 oz (600.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Height	11.811 in (30.000 cm)
Package 3 Width	11.811 in (30.000 cm)
Package 3 Length	15.748 in (40.000 cm)
Package 3 Weight	27.445 lb(US) (12.449 kg)

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**0.6 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**0.5 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.1 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
California proposition 65	**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**


Use Again

Repack and remanufacture

Recyclability potential, in %	**48**
Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Dimensions Drawings

Dimensions

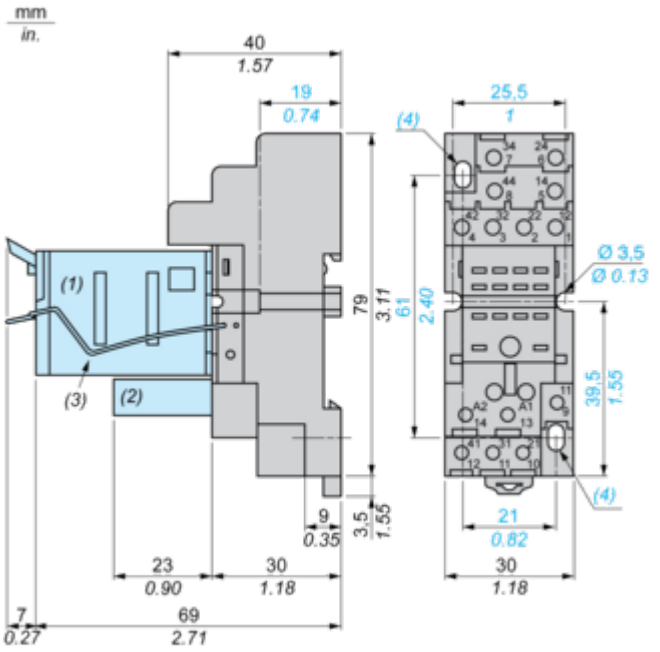

(1) Relays
(2) Protection module
(3) Maintaining clamp
(4) 2 elongated holes Ø 3.5 mm x 6.5 mm / Ø 0.13 in. x 0.25 in.

Connections and Schema

Wiring Diagram




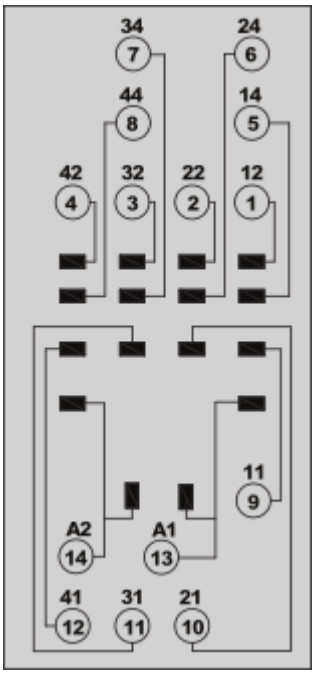


Image of product / Alternate images

Alternative

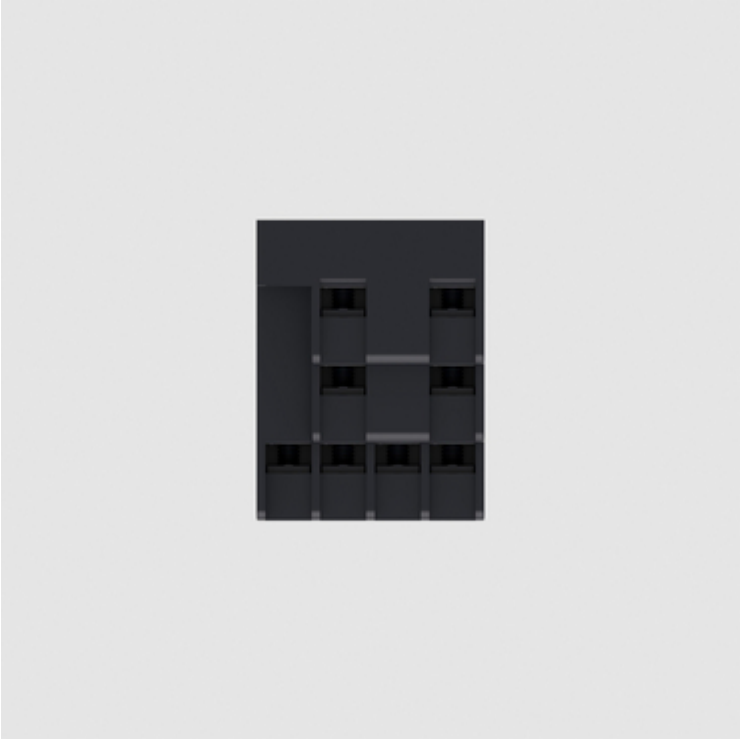

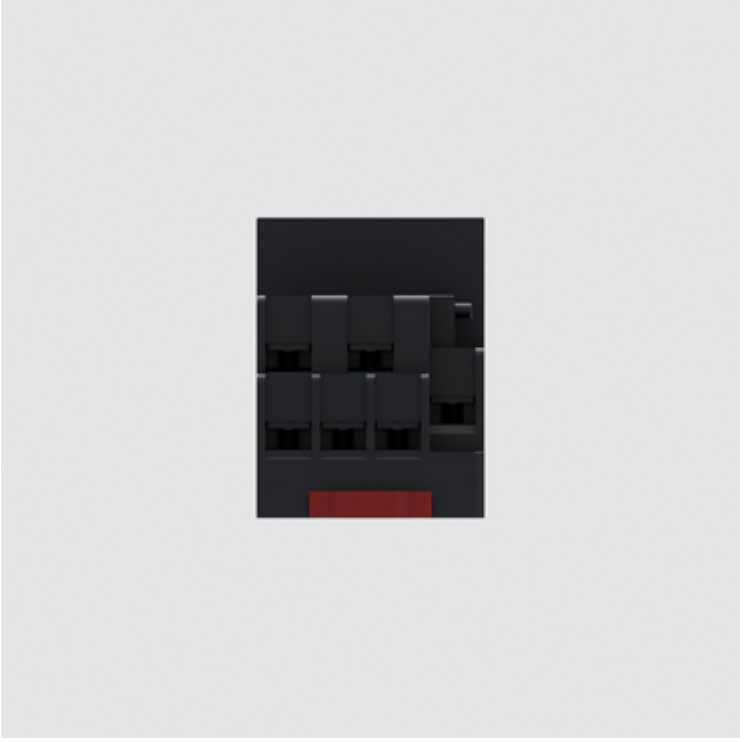

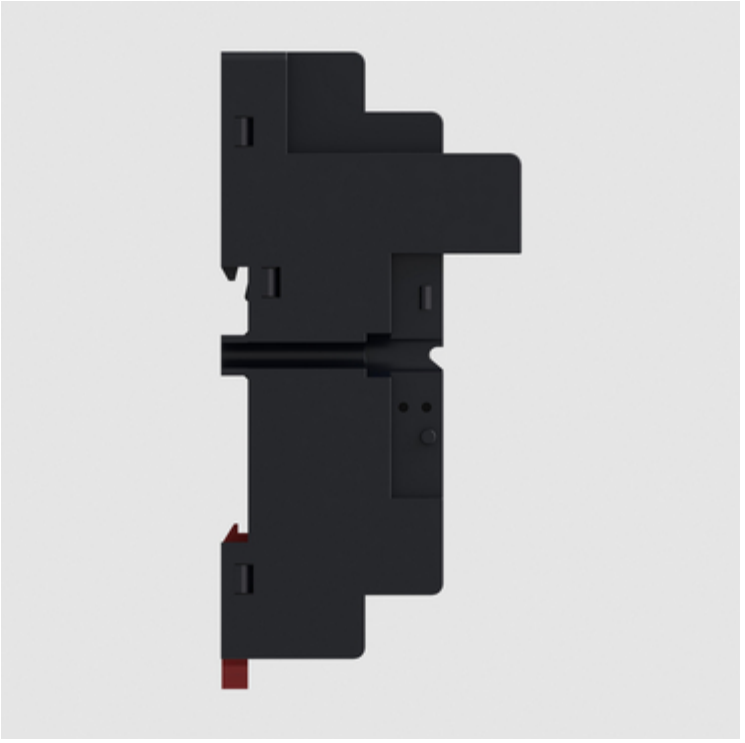




IEC
NEMA
A2
INPUT
14
A1
INPUT
13


10A 300V
20A TOTAL
LOAD
Telemecanique
Made in China
Schneider
Electric
RXZE2M114
10A 250V

Image of product in real life situation

